



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Rod hangs higher (raised grip)	2026-10-02	AC

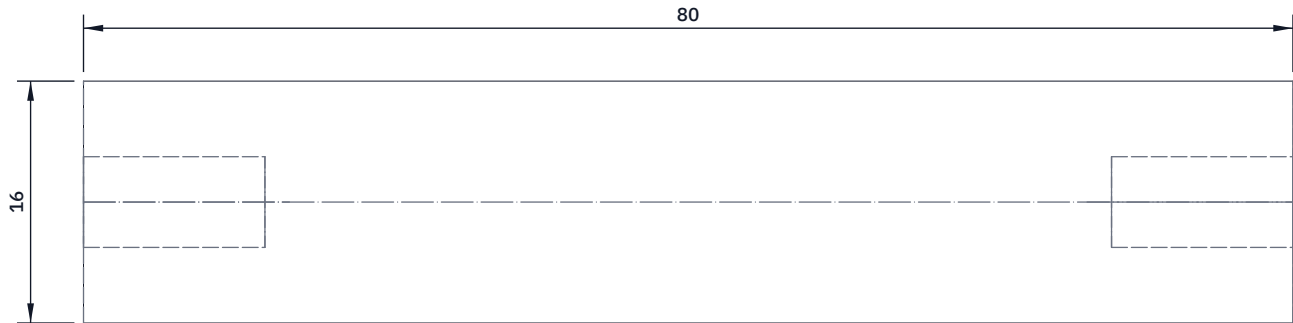


TOP VIEW

Scale 2:1; looking down (along -Z)

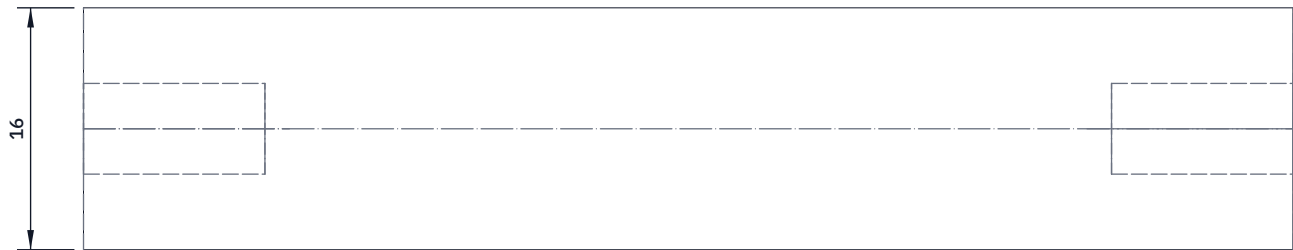


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

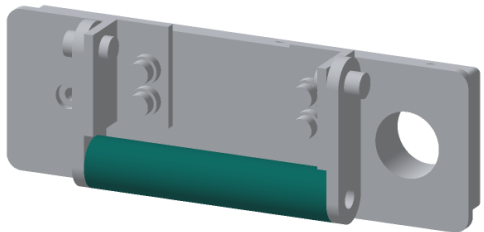

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 80 mm of 16 mm round bar; face both ends square.
Centre drill each end, drill 5 mm 14 deep and tap M6 12 deep (drill press with the bar upright in a V-block).
Break the edges 0.5 mm.
Slide the 60 mm silicone grip sleeve onto the middle (soapy water helps; let it dry).
Fit: between the two arms' inside faces, held by one M6 x 12 button-head screw through each arm, with medium threadlocker.
Stowed, the rod hangs 11.5 mm above the tube's underside, 15 mm out from the end face; the grip clears the flange by 3 mm and stays above the frame's lip.
Leave the rod bare: the bail is not painted.
Check: 80 mm long, within 0.3 mm, so the arms are not pulled in or pushed out.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart bail rod: making sketch

DRAWING NO. TCT-DWG-108			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 6061 round bar 16 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand