


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Lip at the open end and C5 ONLY decal	2026-10-02	AC

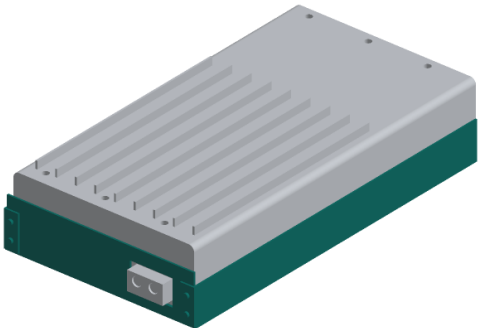

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Floor 283 x 160.4 mm; side walls 30 mm; end stop 40 mm.

Mark one blank: floor in the middle, a wall on each long edge with a 12 mm tab at the stop end, and the stop on one short edge, 157.4 mm wide so it fits between the walls.

Cut the slot in the stop before bending: C5 36 x 22 mm, centred 43 mm toward the front, 7.35 to 29.35 mm above the floor's top. (C25 on the centre line, H70 43 mm toward the back.)

Drill 3 mm relief holes where bend lines cross.

Bend the stop up 90 degrees, then the walls (inside radius 1.5), then fold each tab round the outside of the stop.

Drill 3.3 mm through tab and stop, 6 mm in from the wall, 8 and 22 mm above the floor; rivet with heads inside the frame.

Lip: fold the open end of the floor up 4 mm; cut three 14 mm notches in it, centred 41.75 mm and 8.25 mm toward the front and 58.25 mm toward the back, for the screw heads.

Stick the "C5 ONLY" decal on the stop beside the slot.

Check: inside width 157.4 mm; stop square to the floor.



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart adapter frame (C5 slot shown): making sketch

DRAWING NO. TCT-DWG-110			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 5052-H32 aluminium sheet 1.5 mm; 3.2 mm blind rivets					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand