



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

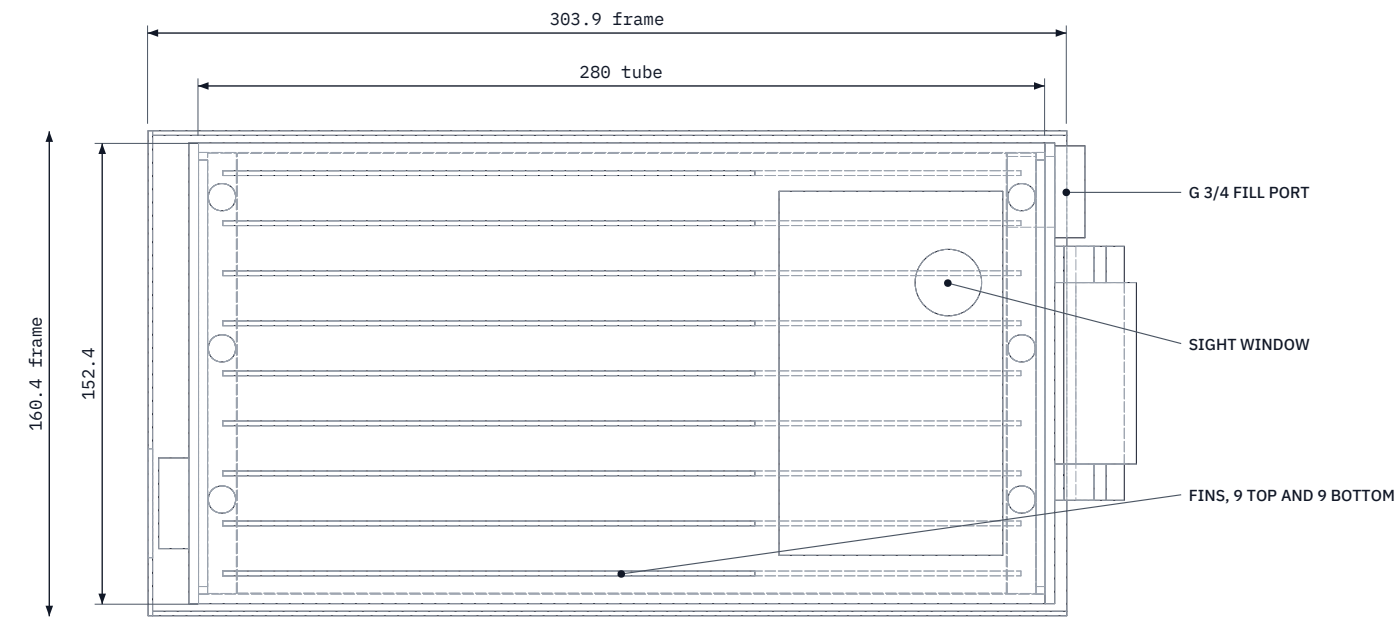


TOP VIEW

Scale 1:2.5

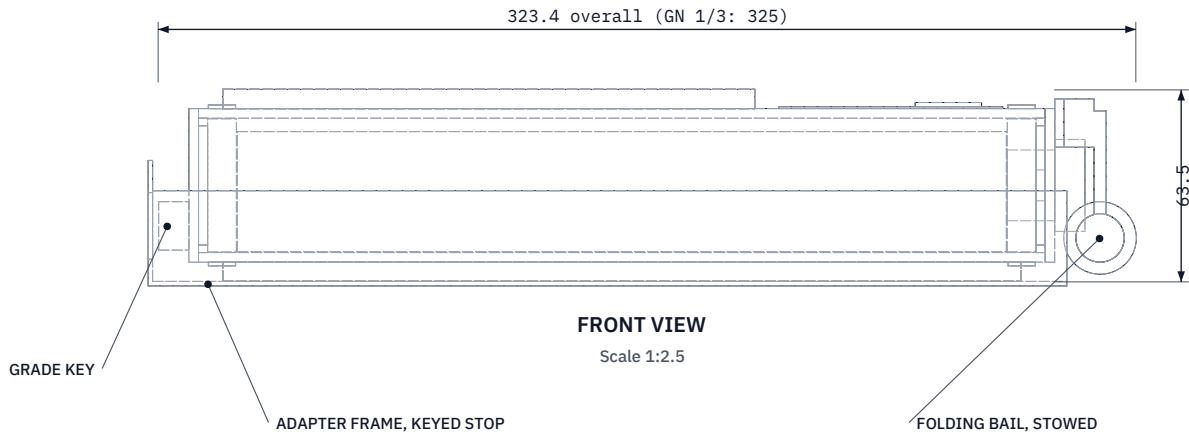


FRONT VIEW

Scale 1:2.5

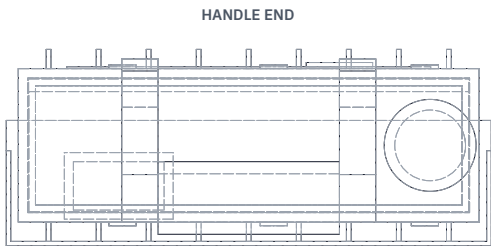

RIGHT VIEW

Scale 1:2.5

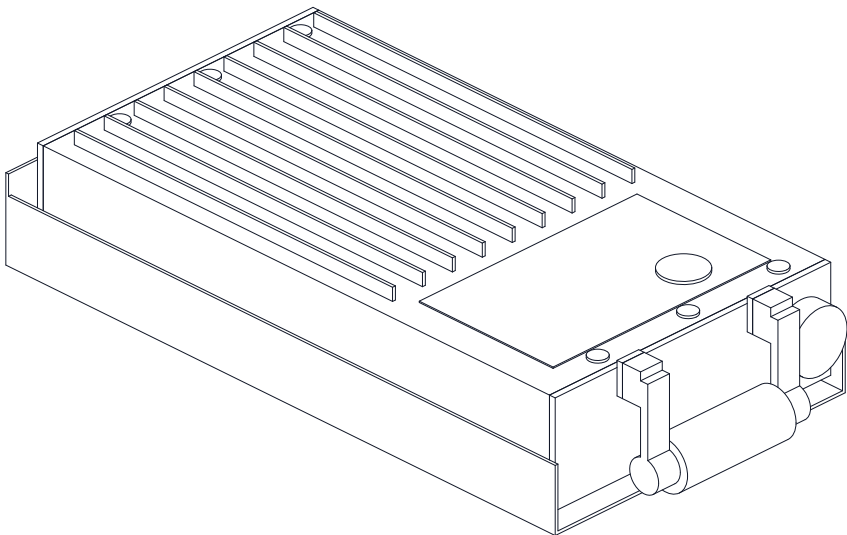

ISOMETRIC VIEW

Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

Shell 6 x 2 x 1/8 in tube, 280 long; inner 146.1 x 44.4 x 254.9

Inner volume 1.655 L; filled to 90 % as liquid at the grade limit

Fins 9 top, 9 bottom, 6.35 x 1.59 on 16.6 pitch

Caps: 3.175 flange, 3 gland spacer, 9.525 plug; FKM 3 mm cord

Six radial M5 screws per cap; G 3/4 fill port in the handle-end cap

Folding bail on 3 phenolic thermal break; finger gap 39 when raised

Key tab 30 wide, 16 high; centre Y: C5 -43, C25 +0, H70 +43, W0 -61

Frame 1.5 sheet, 304 x 160; end stop slot = key + 3 each side

Sized in TCT-CAL-001; shown: C5 key and C5 frame

Third-angle; front view from -Y; handle end at +X

THERMACART

General arrangement, TC-L in frame

DRAWING NO. TCT-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2.5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES 6063-T52 tube, 6061 caps, 5052 frame; FKM seals. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	