


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

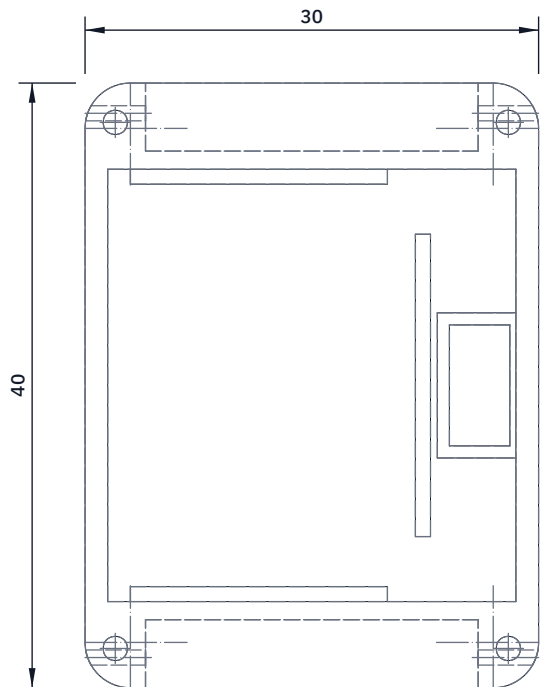


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

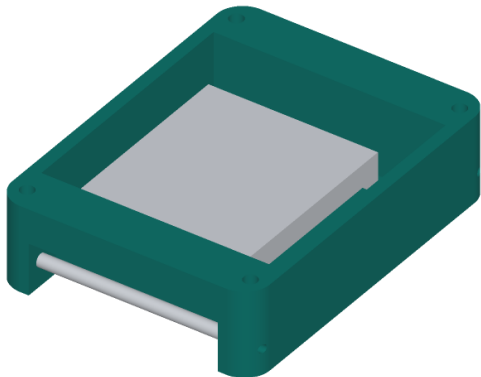

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print open side up, 0.2 mm layers; 30 long x 40 wide x 10 high, corners R3.
Inside: 27 x 28.6, floor 1. Strap notch at each strap end (30 mm face): 22 wide, 4.5 deep, 6 high from the underside; it bridges, no support needed.
Spring bar holes: print, then drill 1.0 mm right through each horn (the solid corner beside the notch), 2 from the end, 3 up.
Screw holes: one per horn, 13 each side of centre along the 30 mm length and 2.6 in from the end; open to 1.6 mm, 4.5 deep.
Cell pocket: ribs 1.5 high leave 20.35 x 26.62, 0.3 mm round the cell.
Charging opening 4 x 8 through the floor, 0.4 from the end wall, in a collar 0.8 thick and 2 high that holds the glue.
Diode spot: on the floor 8.5 to one side of the opening, clear of the collar.
Check: a 1.0 mm drill passes each bar hole; the cell drops into its pocket by its own weight; nothing is left in the notch.

TremorTrace enclosure base: making sketch

DRAWING NO. TRT-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed; lug horns solid (100 % infill)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand