


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

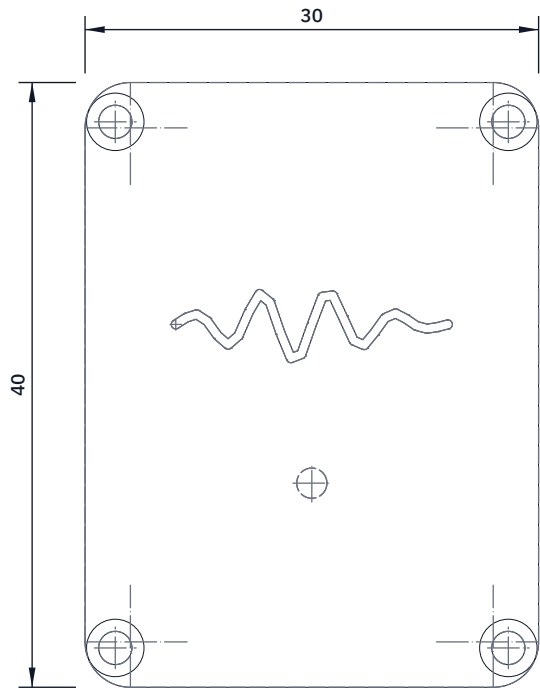


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

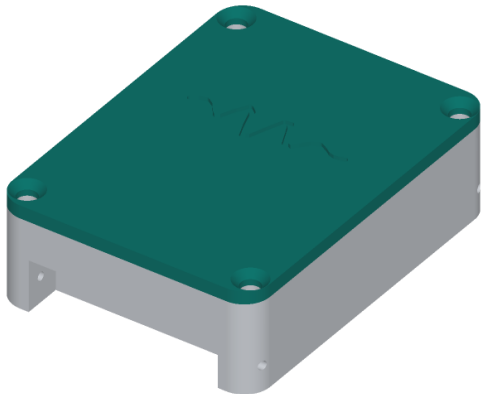

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print top face down on a smooth bed: 30 x 40 x 1.5, corners R3.
Four screw holes 2.2 mm at the horn positions (13 and 17.4 each side of centre), each with a 90 degree countersink 3.8 across.
Light pipe bore: drill 2.0 mm on the centre line, 6.5 from the centre toward one strap end, over the module's status LED.
Check the LED position on the module you buy and move it to suit.
Light pipe: cut 2 mm off the rod, square and polish both ends, press in flush with the top, a drop of clear epoxy underneath.
It stands 0.5 mm below the lid, 1.2 mm above the module.
Fit: lies on the gasket; four M2 x 6 countersunk screws into the horns.
Mark: a short wave debossed 0.4 deep (two 0.2 mm layers) on the top face, clear of the light pipe and screws; the lid keeps 1.1 mm under it.
Check: the screw heads sit flush or just below the top face.

TREMORTRACE

github.com/BoujeeEnjinia1701/tremortrace

TremorTrace lid with light pipe: making sketch

DRAWING NO. TRT-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed; light pipe 2 mm clear acrylic rod					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand