


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

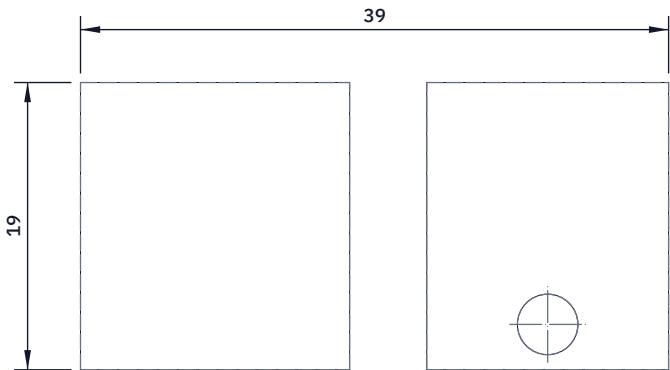


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

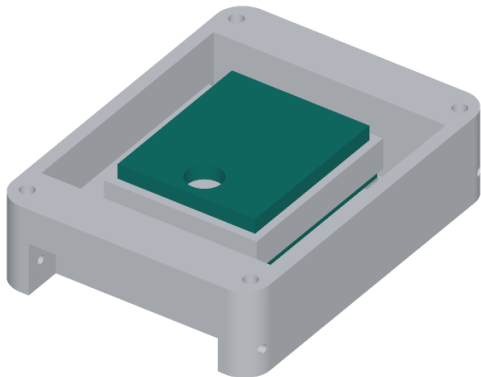

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn side by side (39 is both pads together): lower pad left, upper right.

The upper pad is drawn squeezed, 1.7 thick; cut it from 2 mm foam.

Lower pad: 17.8 x 19 from 0.5 mm double-sided adhesive foam.

It holds the module on the cell and keeps its pads off the cell.

Upper pad: 16 x 19 from 2 mm closed-cell foam, with a 4 mm hole centred 3 mm in from one short end, over the status LED.

The lid squeezes it to 1.7 mm and so clamps the stack.

Cut with a sharp knife on a cutting mat; punch the hole.

Check: the upper pad covers the module but not the light pipe;
the lower pad does not reach the module's battery pads.

TREMORTRACE

github.com/BoujeeEnjinia1701/tremortrace

TremorTrace foam pads (lower and upper): cutting sketch

DRAWING NO. TRT-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Lower: 0.5 mm double-sided adhesive foam. Upper: 2 mm closed-cell foam					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand