




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

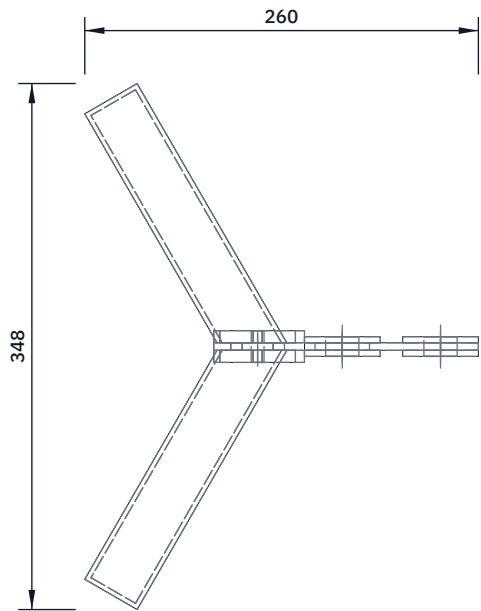


TOP VIEW
Scale 1:5; looking down (along -Z)

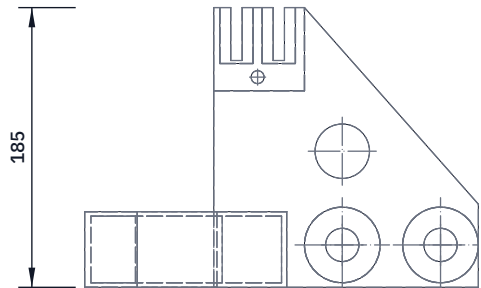

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

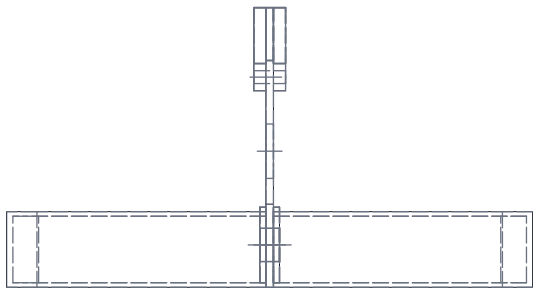

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

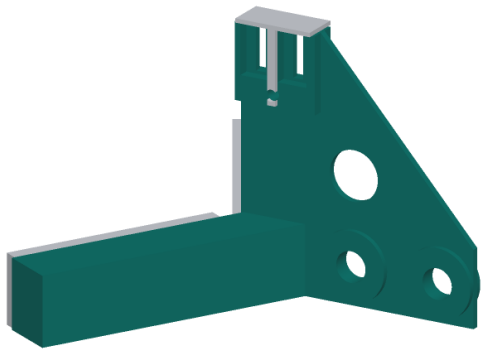

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

TIG weld the bars to the spine foot first (AC, ER5356), in a jig that holds their trunk-side faces at 120 deg, bottoms level. 5 mm fillets all round each bar end; the bar ends must not stand proud of the spine's front edge.

Then the four eye rings, then the two cheeks.

Check: the V faces meet (if extended) 8 in front of the spine front edge; both bar faces flat within 1 mm.

Clean the bar faces, slots and eyes with a stainless brush; run a 7 mm bar through both slots and the 8 pin through its hole. Inspect every weld; no repair welding of a crack.

Stamp SWL 100 kg ONE PERSON and the frame number on the spine.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: collar frame weldment (make 1)

DRAWING NO. TKB-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6082-T6 aluminium parts above, TIG welded (ER5356), not galvanised					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		