



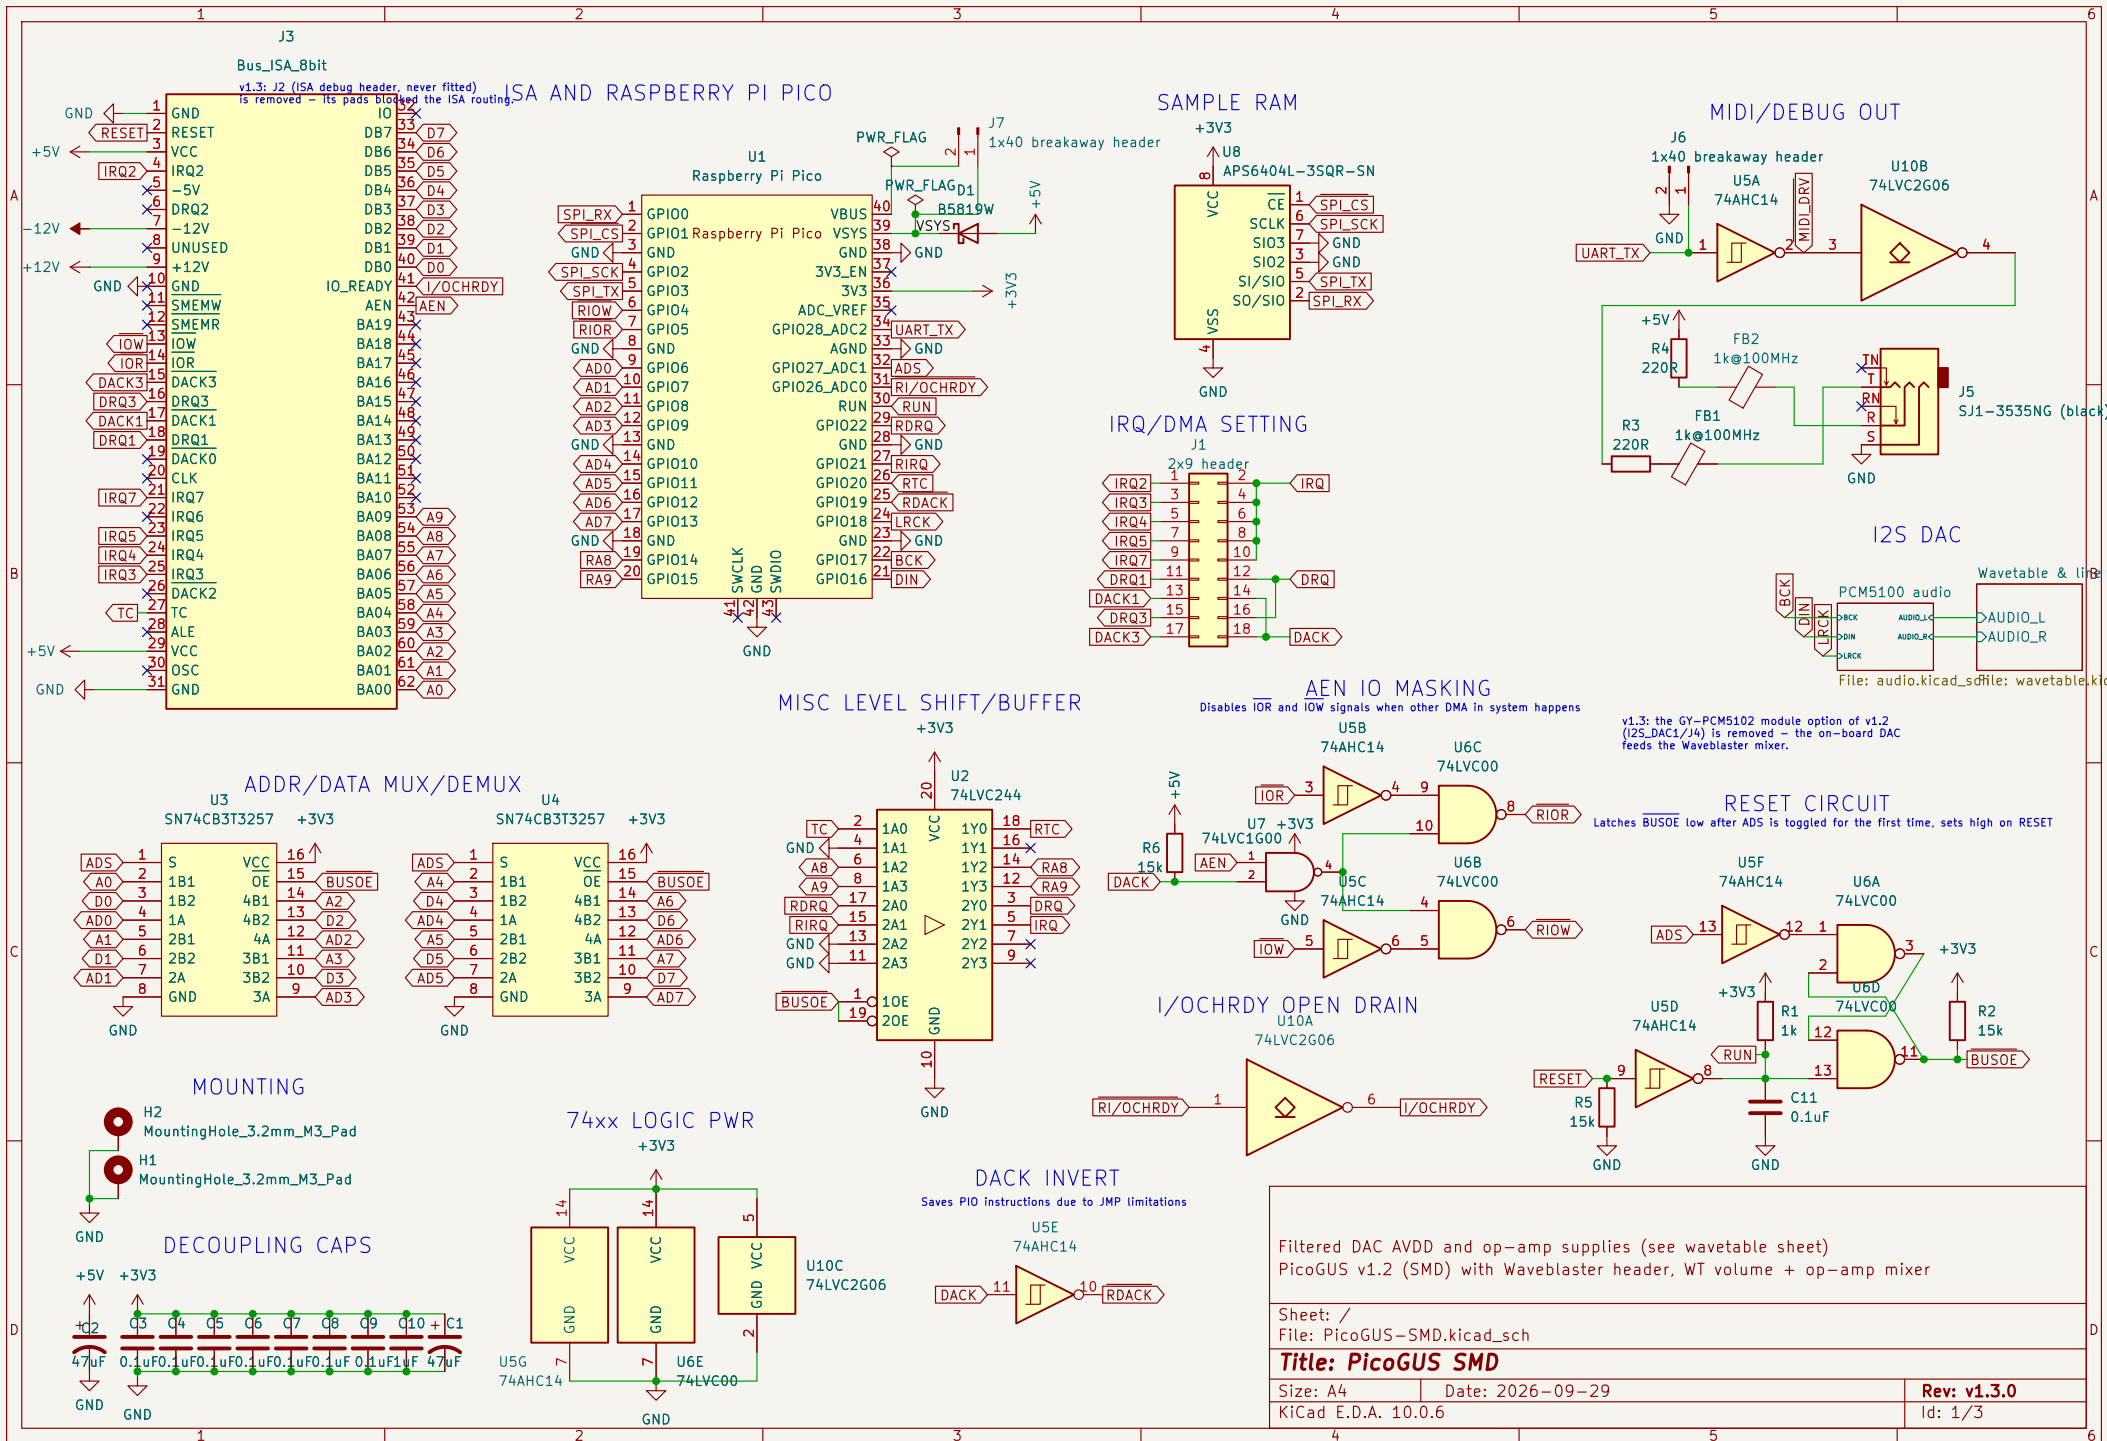

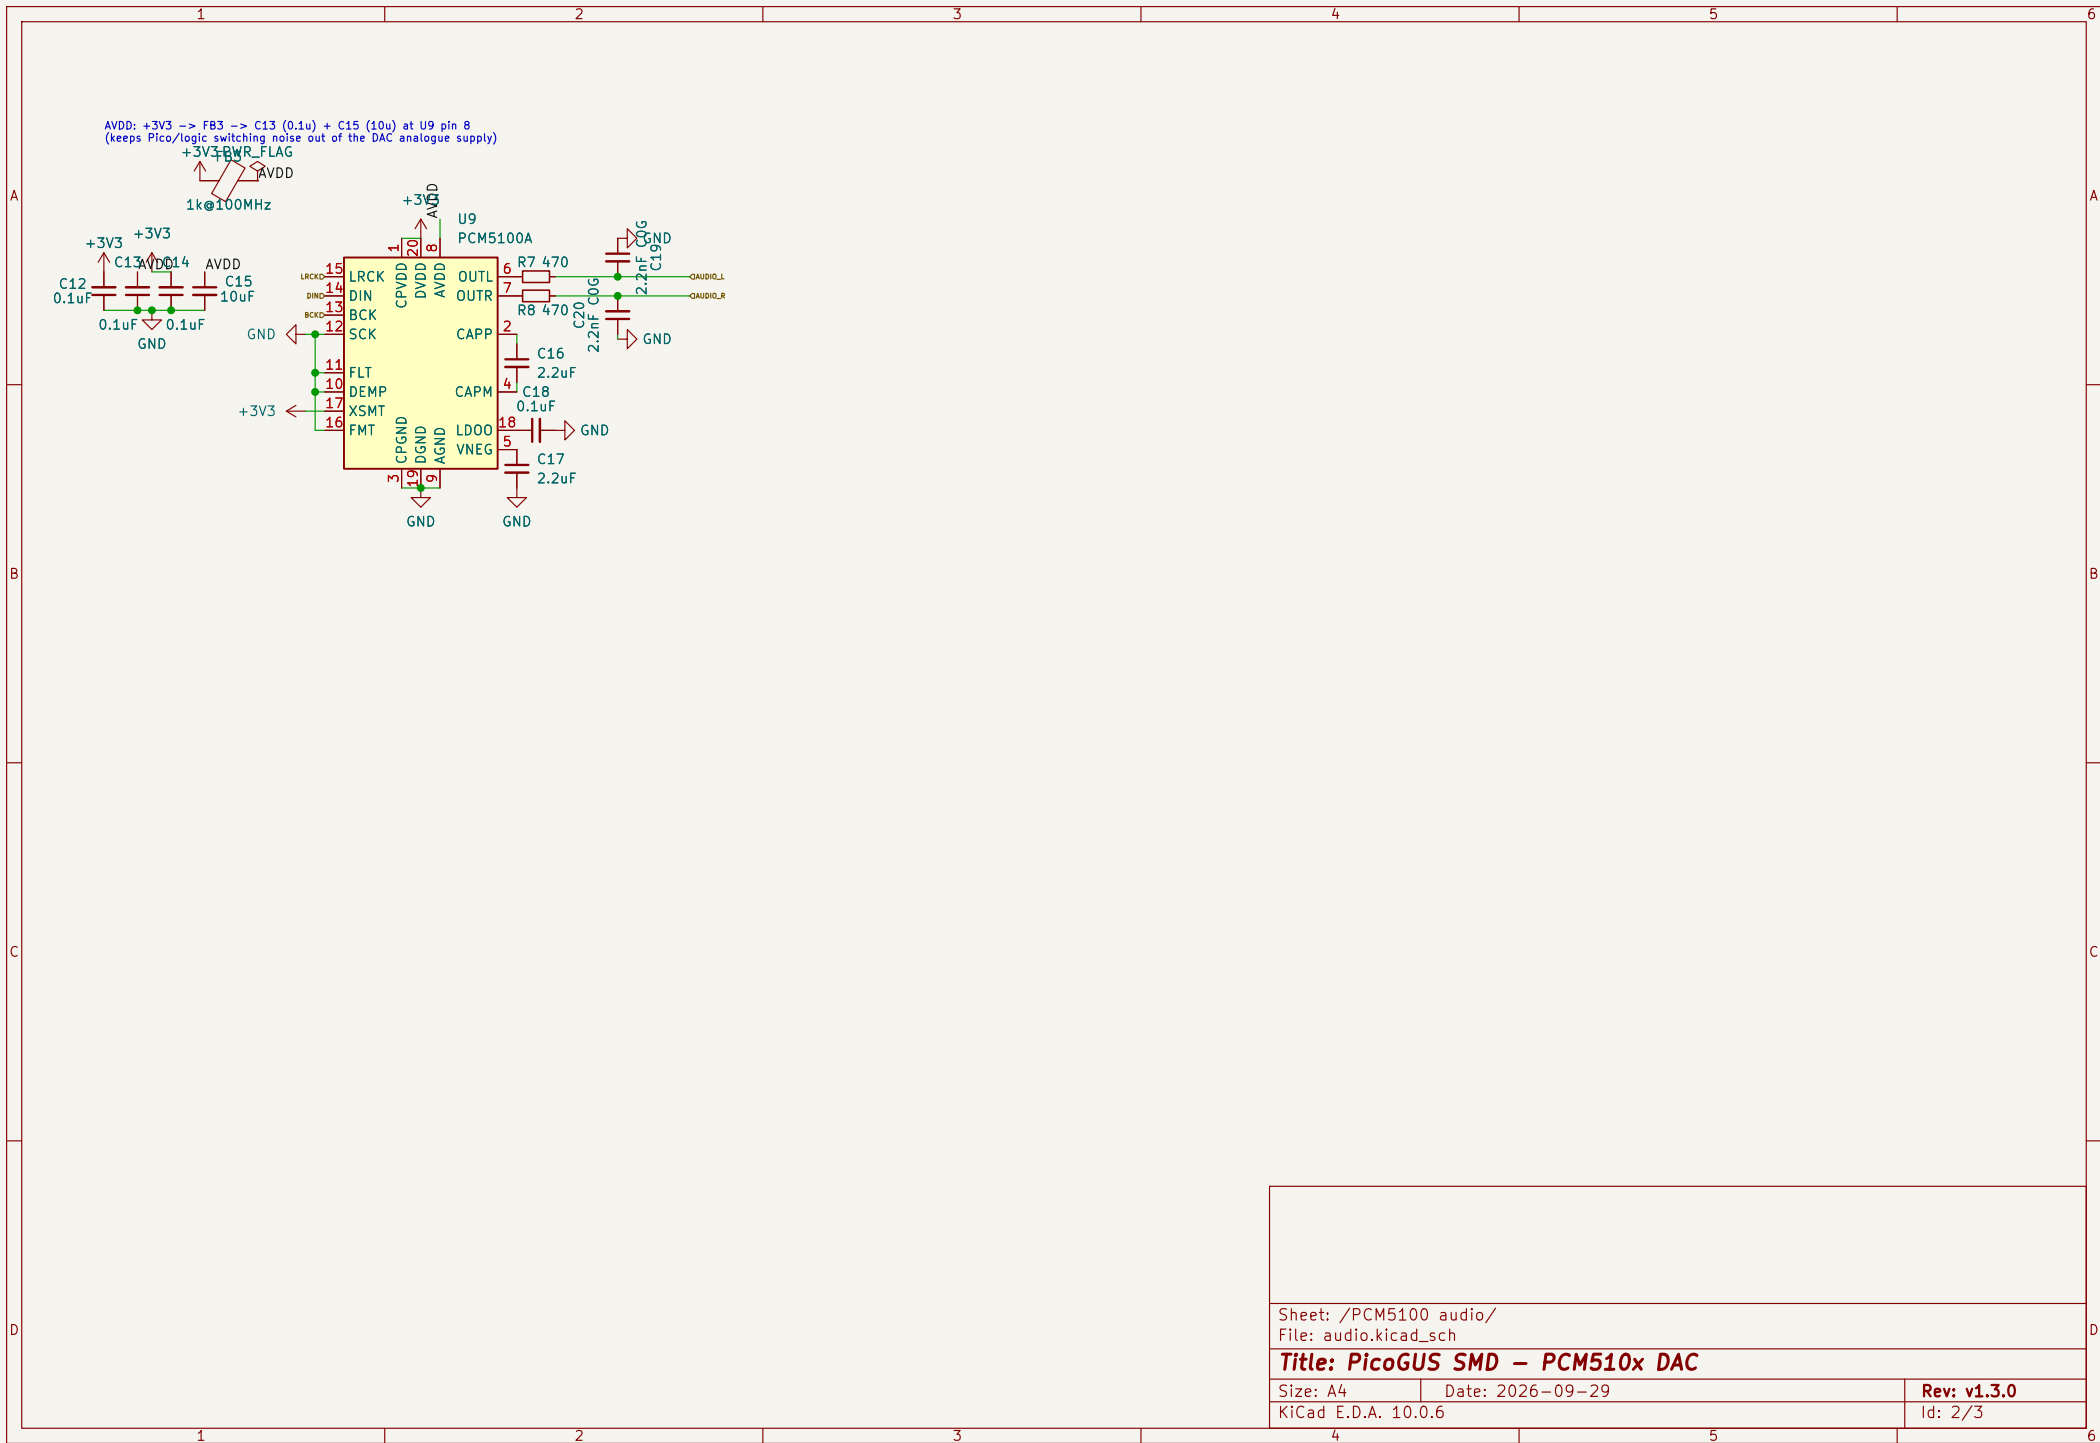


Sheet: /PCM5100 audio/
File: audio.kicad_sch

Title: PicoGUS SMD – PCM510x DAC

Size: A4	Date: 2026-09-29	Rev: v1.3.0
KiCad E.D.A. 10.0.6		Id: 2/3


WT CONTROL (U12 = 74LVC2G06, open-drain inverters @ +3V3)

Both outputs are open drain with 10k pull-ups to +3V3, so the daughterboard never sees 5 V on /RESET or MIDI (some DBs have 3.3 V inputs).
/RESET: low while ISA RESET is high. MIDI: same data as the MIDI-out jack (MPU-401 UART).

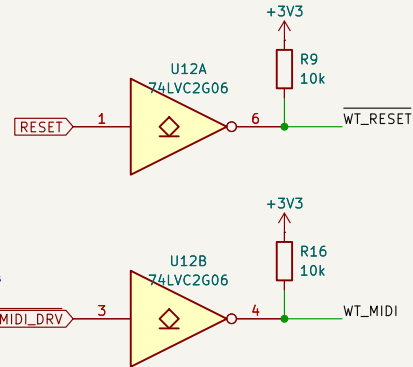

WAVEBLASTER HEADER


2x13 male header, 2.54 mm. Daughterboard (female socket) sits over the card; footprint has the standard standoff holes.





DGND 1-11, AGND 15-25:
both to the ground plane

Waveblaster 2x13 male
GND

WT SUPPLY DECOUPLING (place at J9)




U12 POWER (+3V3) + DECOUPLING (place at U12)





WAVETABLE VOLUME + MIXER

RV1 (dual 10k log) sets the WT level; pins 3/6 = CW end (signal), 1/4 = CCW end (GND).
U11 sums PCM and WT at unity gain (inverting, 10k/10k) - no level loss, and the WT knob does not change the PCM level. C22/C23 (bipolar) block DC from the DB. R14/R15 keep them discharged when no DB is fitted. Output: 100R, DC-coupled like v1.2.



U11 SUPPLY: ISA +/-12 V via R23/R24 (10R) + C32/C33 (47u), C2

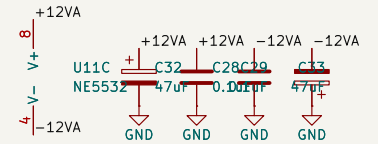

LINE OUT (green)

Derived from the hand386 ISA adapter mixer and the PicoGUS 2.0 WT header
Waveblaster (wavetable) daughterboard header, analog WT volume and op-amp mixer

Sheet: /Wavetable & line out/
File: wavetable.kicad_sch

Title: PicoGUS SMD - Waveblaster header & line-out mixer

Size: A4 Date: 2026-09-28

KiCad E.D.A. 10.0.6

Rev: v1.3.0

Id: 3/3