




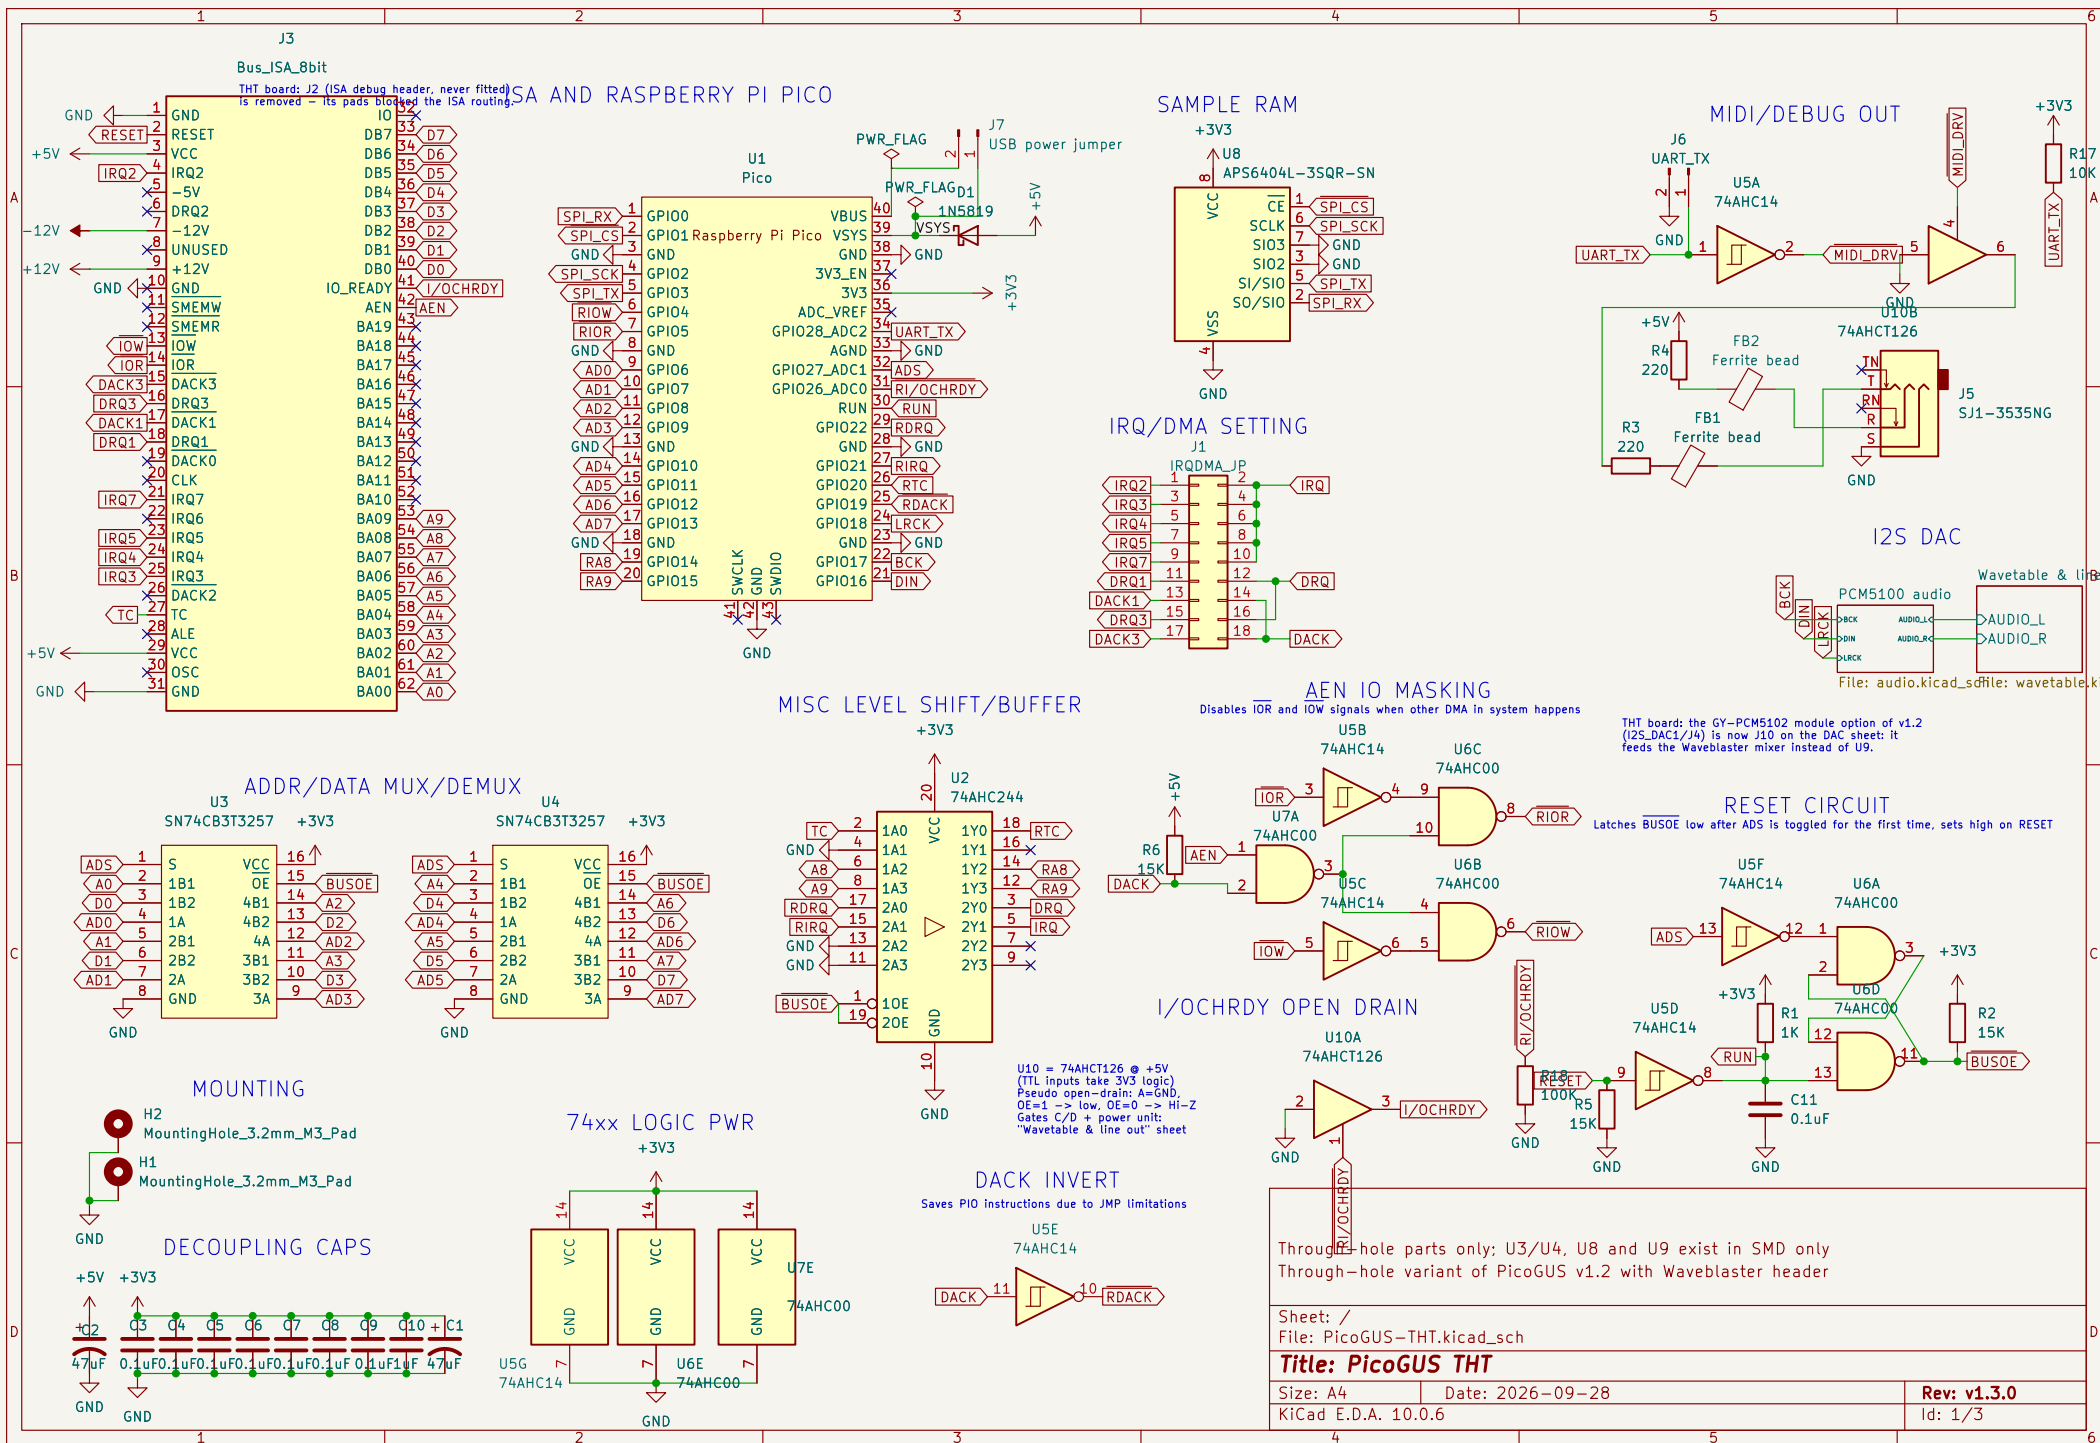

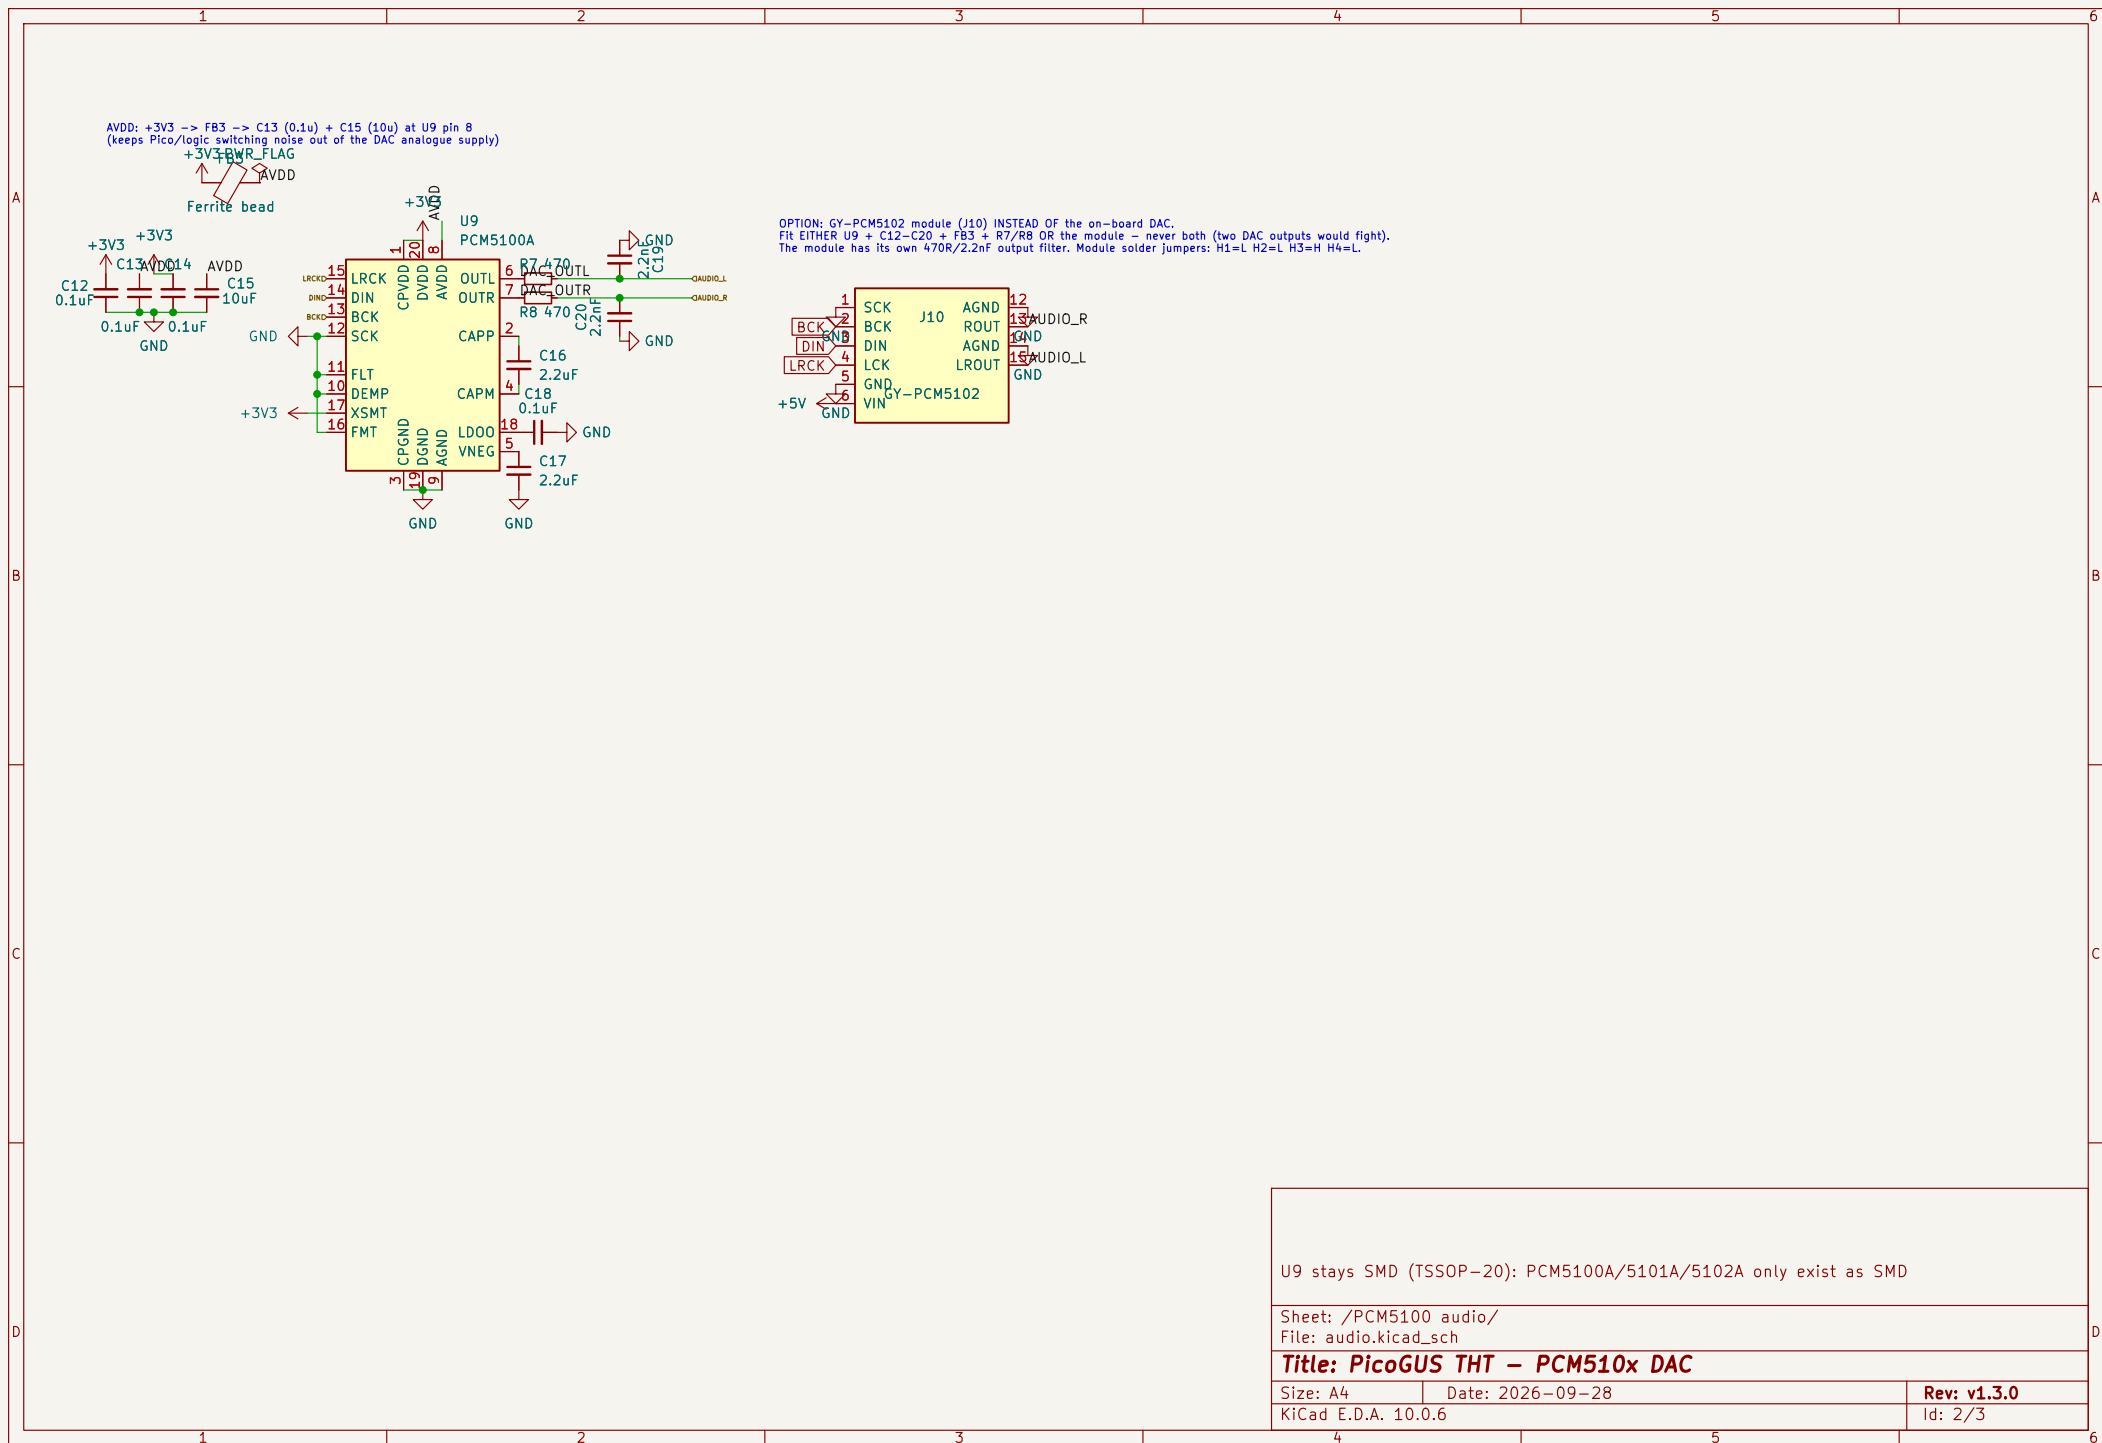


WT CONTROL (U10 = 74AHCT126 @ +5V)

Both outputs are pseudo open-drain (A=GND, OE drives) with pull-ups to +3V3, so the daughterboard never sees 5 V on /RESET or MIDI (some DBs have 3.3 V inputs). /RESET: low while ISA RESET is high. MIDI: same data as the MIDI-out jack (MPU-401 UART).

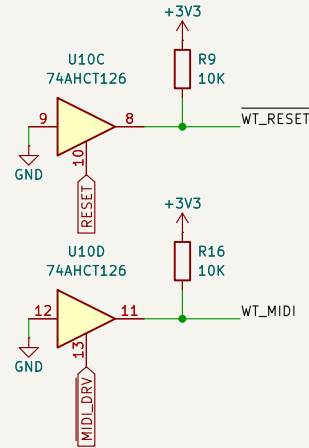


WAVEBLASTER HEADER

2x13 male header, 2.54 mm. Daughterboard (female socket) sits over the card; footprint has the standard standoff holes.





DGND 1-11, AGND 15-25: both to the ground plane

WT SUPPLY DECOUPLING (place at J9)






U10 POWER (+5V) + DECOUPLING (place at U10)





WAVETABLE VOLUME + MIXER

RV1 (dual 10k log) sets the WT level; pins 3/6 = CW end (signal), 1/4 = CCW end (GND). U11 sums PCM and WT at unity gain (inverting, 10k/10k) - no level loss, and the WT knob does not change the PCM level. C22/C23 (bipolar) block DC from the DB. R14/R15 keep them discharged when no DB is fitted. Output: 100R, DC-coupled like v1.2.

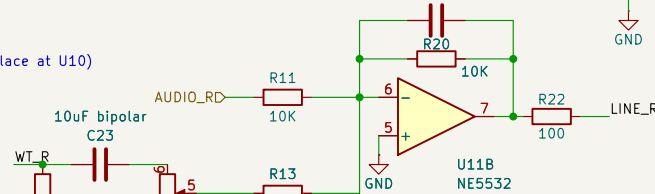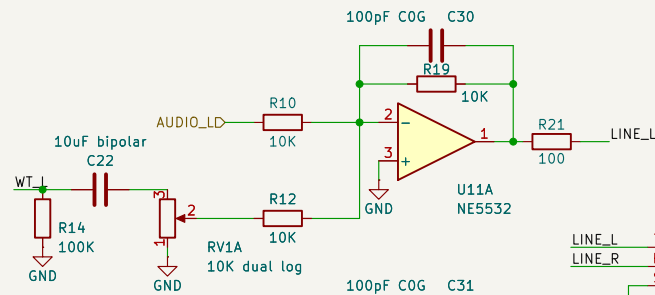


U11 SUPPLY: ISA +/-12 V via R23/R24 (10R) + C32/C33 (47uF, C28/C29)

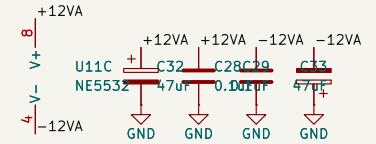

LINE OUT (green)

U7 SPARE GATES (74AHC00)

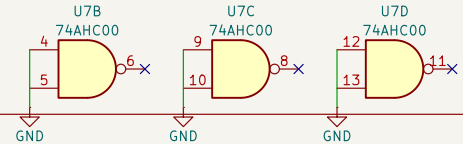

Derived from the hand386 ISA adapter mixer and the PicoGUS 2.0 WT header Waveblaster (wavetable) daughterboard header, analog WT volume and op-amp mixer

Sheet: /Wavetable & line out/

File: wavetable.kicad_sch

Title: PicoGUS THT - Waveblaster header & line-out mixer

Size: A4

Date: 2026-09-28

Rev: v1.3.0

KiCad E.D.A. 10.0.6

Id: 3/3