


CONCEPT, NOT FOR FABRICATION


TrunkBelay · github.com/BoujeeEnjinia1701/trunkbelay

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the constructable TRL 3 model (TKB-DDR-002)	2026-10-03	AC
P2	Aluminium 6082-T6 frame, bars RHS 70 x 30 x 5, 6 mm rings, 8 mm cheeks (TKB-DDR-003)	2026-10-03	AC

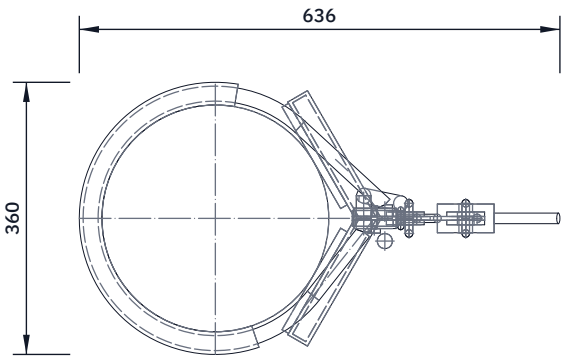


TOP VIEW

Scale 1:10; looking down (along -Z)

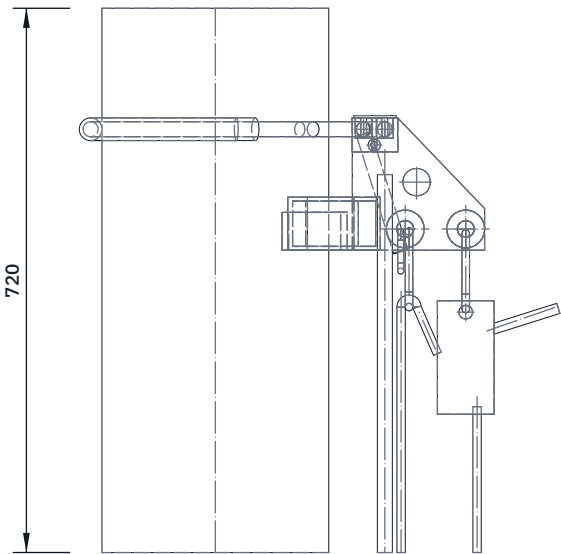


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

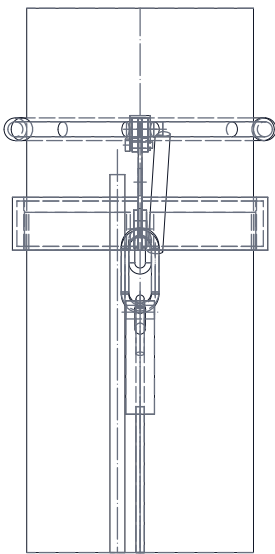

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

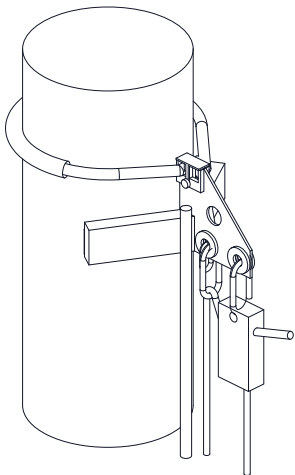

ISOMETRIC VIEW

Seen from the front right, above; 300 mm trunk section for reference

KEY DIMENSIONS (MM) AND DATA

Fits trunks 200 to 450 across; drawn on a 300 trunk
Spine 5 plate, 175 long x 175 high
Bearing bars RHS 70 x 30 x 5 in a 120 deg V
Rubber pads 155 x 50 x 10
Load eye 150 out from the spine front edge, 28 up
Chain line 160 above the frame foot; slots 7.5 wide
Chain 6 mm grade 80, 110 links; sleeve 600 tubular webbing
Keeper 3 sheet; ball-lock pin 8 through cheeks and web
Locking factor 1.54 or more (TKB-CAL-001, B4)
Sized for 2.5 kN static (R1); one person, 100 kg
Carried 4.74 kg; collar 3.6 kg; whole kit 8.5 kg
PRELIMINARY, NOT FOR FABRICATION

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

Palm trunk rescue collar and lowering kit: general arrangement

DRAWING NO. TKB-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium 6082-T6 plate and RHS, TIG welded, mill finish; rubber pads; grade 80 chain. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand