



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

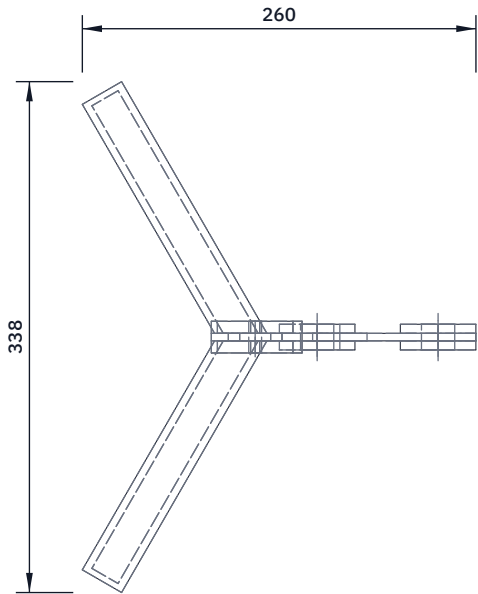


TOP VIEW

Scale 1:5; looking down (along -Z)

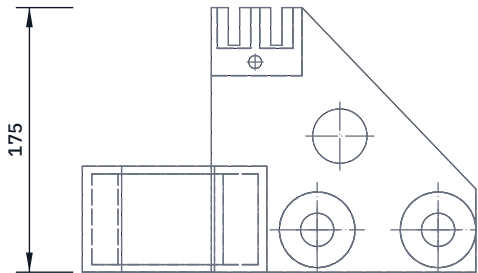


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

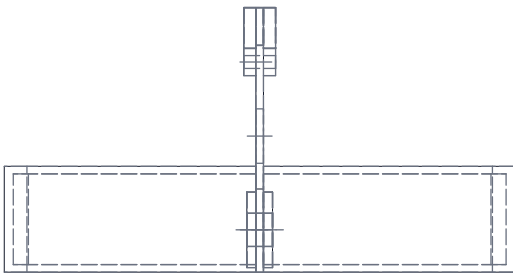

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

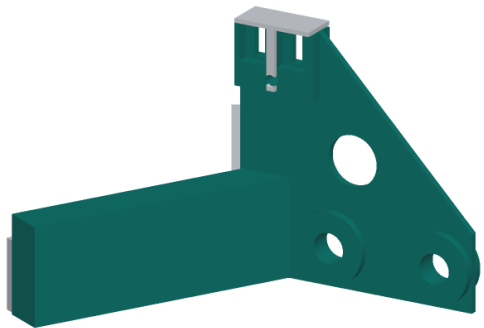

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Clean every joint with a stainless brush and solvent first.

TIG weld the bars to the spine foot in a jig that holds their trunk-side faces at 120 deg, bottoms level with the foot.

4 mm fillets all round each bar end; the bar ends must not stand proud of the spine's front edge.

Then the four eye rings, then the two cheeks.

Check: the V faces meet (if extended) 8 in front of the spine front edge; both bar faces flat within 1 mm.

No galvanising: aluminium is left bare. Deburr the slots and eyes; a 7 mm bar must pass both slots, the 8 pin its hole.

Welds weaken 6082-T6 beside them by about half: weld only where shown, and never straighten the frame by heating.

Stamp SWL 100 kg ONE PERSON and the frame number on the spine.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: collar frame weldment (make 1)

DRAWING NO. TKB-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium 6082-T6 parts above, AC TIG welded (ER5356), mill finish					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand