


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

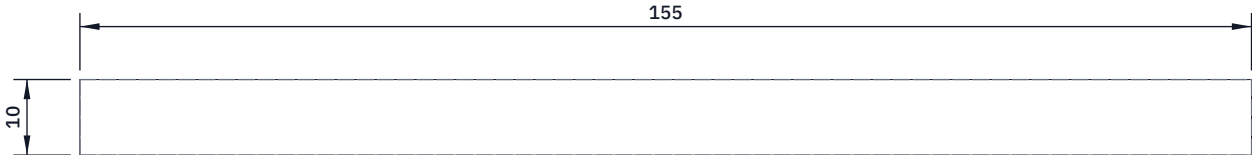

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

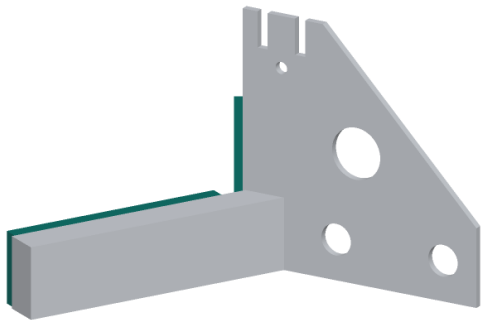

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 155 x 50 from 10 mm fabric-ply rubber sheet.
Drill two 6.5 holes on the centre line, 35 from each end, and counterbore them 13 diameter, 4 deep from the trunk side, so the screw heads sit 3 below the rubber face.
Bond to the bar's trunk-side face with contact adhesive, the inner end 15 from where the two pad faces would meet.
Fit M6 x 30 countersunk screws through pad and bar face with a washer and nyloc nut inside the bar (reach in from the inner end before the bar is capped, or use rivet nuts).
Replace a pad that is torn, glazed or soaked in oil.

TRUNKBELAY				github.com/BoujeeEnjinia1701/trunkbelay			
TrunkBelay: rubber bark pad (make 2)							
DRAWING NO. TKB-DWG-106			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Natural rubber sheet with one fabric ply, 10 mm, 60 to 70 Shore A							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	