

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC
P2	VDS-DDR-003: steerable camera tip	2026-10-24	AC

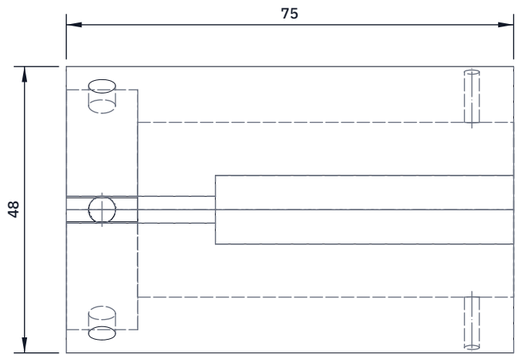


TOP VIEW

Scale 1:1; looking down (along -Z)

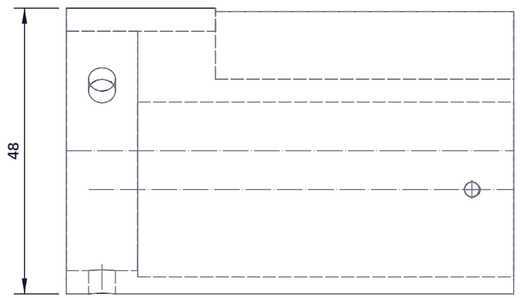


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

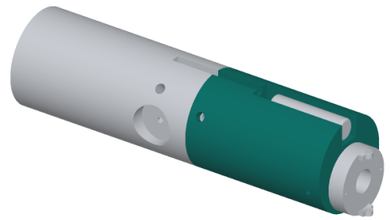

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: face and turn to 48 mm outside, 75 mm long.
Back end: bore 40.2 mm, 12 mm deep, for the collar spigot.
Offset the work 6.5 mm (4-jaw chuck): bore 29.3 mm from 12 mm right through the front, for the base link of the steerable tip. Thinnest wall 2.85 mm, at the bottom.
Mill or saw and file on top: pocket 11.5 mm wide, floor 12 mm above the axis, 50 mm back from the front face.
Groove on top 4.5 mm wide, floor 20 mm above the axis, from the back face to the pocket (breaks into the bore).
Three 4.5 mm holes 6 mm from the back face, at 30, 150 and 270 deg from the side; countersink for M4.
Two M3 tapped holes, 7 mm from the front, either side on the bore's centre height, for the base link grub screws.
Break edges 0.5 mm. Check: base link spigot slides in.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope nose: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-103	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

6061-T6 round bar 50 mm, 80 mm long

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand