



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	VDS-DDR-003: steerable camera tip	2026-10-03	AC

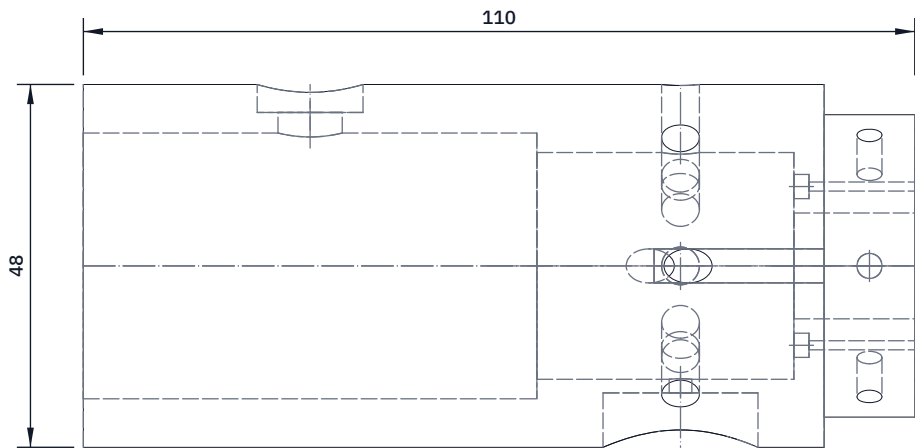


TOP VIEW

Scale 1:1; looking down (along -Z)

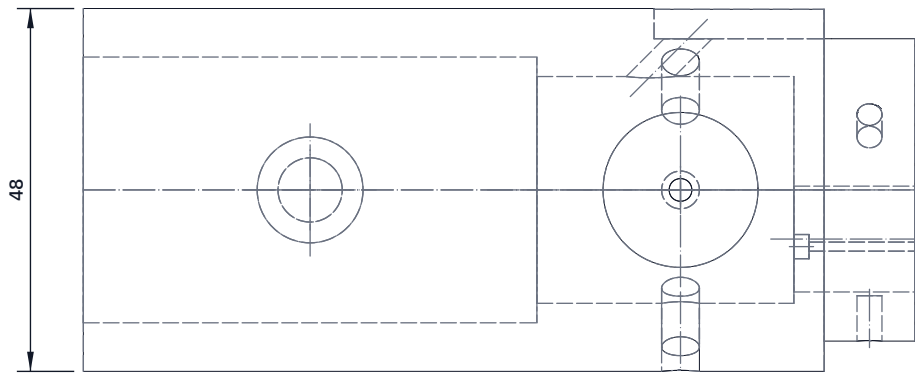


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

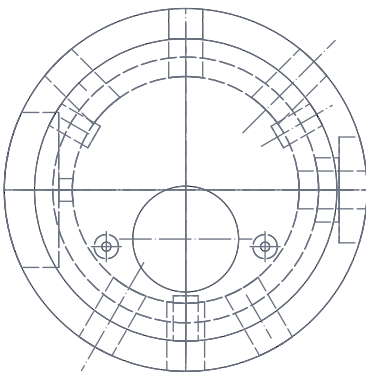

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

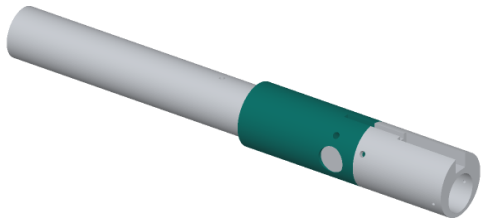

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: 48 mm outside x 98 mm, then a 40 mm spigot 12 long.

Back: bore 35.16 mm, 60 deep (a coupler must slide in).

Bore 30 mm from 60 to 94 mm: the air plenum; 4 mm front wall.

Spigot: 14 mm bore 6.5 mm below the axis, through, for the cable grommet. Tap three M4 holes 6 mm deep, 4 from its end.

Button hole 8.5 mm on the button line, 30 mm from the back; spotface 14 mm down to 20.3 mm from the axis.

Six 5 mm outlets 79 mm from the back face, at 0, 45, 135, 240, 270 and 300 deg from the button line toward the top.

Steering: two 3.2 mm stops 2 deep in the plenum side of the front wall, 10.5 mm each side, 7.5 below the axis; 1.2 mm wire holes on through the spigot.

Speaker pocket on the far side: 20.5 mm, flat floor 16.8 mm from the axis, 79 mm back; 3 mm wire hole into the plenum.

Water exit 4.5 mm at 45 deg on top, axis crossing 12 mm above the axis 72 mm from the back; groove 4.5 x 4 on top.

Check: coupler, nose, speaker fit; blow through outlets.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope collar: making sketch

DRAWING NO. VDS-DWG-104			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 round bar 50 mm, 115 mm long					