

WASTEWISE SCAN · DESIGN PRECIS

WasteWise Scan design precis

Open Hardware Portfolio · amishchadha.com

DOCUMENT CONTROL

Document ID	WSC-PRC-001	Version	0.3
Status	Draft	Date	2026-09-25
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/wastewise-scan		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY


Version	Date	Author	Change
0.3	2026-09-25	Amish Chadha	TRL 3; decisions of WSC-DDR-001 applied; numbers from WSC-CAL-001; 47 kOhm gain and interleaved dark readings; new findings on sunlight, display and window crosstalk
0.2	2026-09-25	Amish Chadha	Populate to TRL 2 (architecture, first-order numbers, safety, media)
0.1	2026-09-24	Amish Chadha	Initial scaffold

WasteWise Scan design precis

WasteWise Scan is a palm-sized scanner that the user presses against a plastic item. It flashes eight near-infrared bands one after another, reads the reflection with an InGaAs photodiode, and in about 0.33 s shows the resin, a confidence mark and the local price grade. The calculation note WSC-CAL-001 shows that it meets the speed, battery, mass, logging, calibration, eye-safety and prototype cost requirements on paper. It does not meet the sunlight requirement for clear and translucent items (R4) or the direct-sun legibility requirement (R7), and resin accuracy (R1) remains at risk near 1,700 nm. The prototype costs \$163.00 in parts, which Amish accepted on 2026-09-25; \$150 remains the volume target.

WasteWise Scan

CONCEPT, NOT FOR FABRICATION

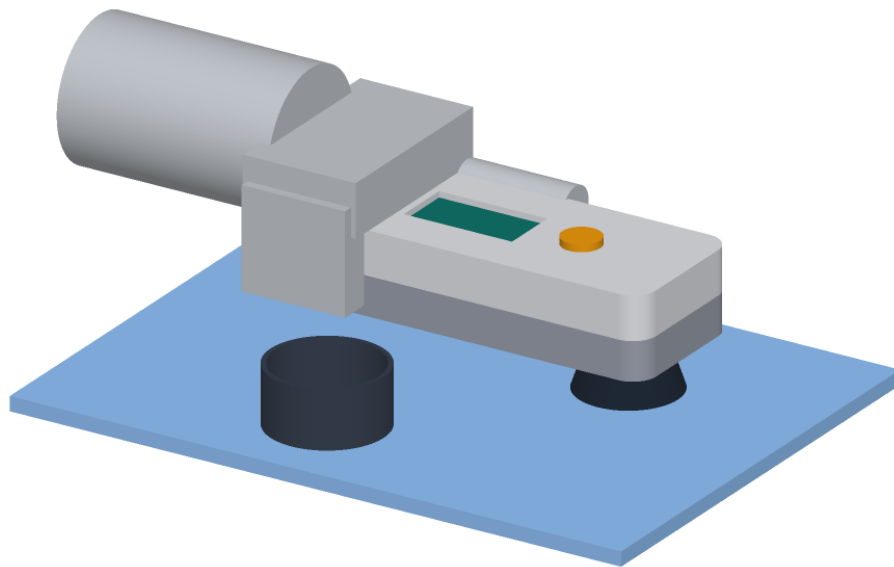

Grey: Hand, HDPE crate panel for scale

Figure 1. Concept render from the parametric model. The grey hand and the blue crate panel are for scale only.

■ The sensor

The scaffold named an 18-channel AS7265x-class sensor. That chip covers about 410 to 940 nm ([SparkFun Triad board](#)), which misses the polymer absorption bands near 1,150 to 1,250 nm and 1,650 to 1,750 nm that NIR sorters rely on (see WSC-PRB-001 and the review by [Neo et al. 2022](#)). Amish decided on 2026-09-25 (WSC-DDR-001, D1) to use the approach of the open [Plastic Scanner](#) project instead: discrete NIR and short-wave infrared (SWIR) LEDs from 850 to 1,650 nm and one InGaAs photodiode ([Hackaday, 2021](#)). It is still a low-cost multispectral sensor, so the pitch is unchanged.

■ How it works

1. **Press.** The user presses the soft black shroud against a flat or gently curved part of the item. The shroud blocks sunlight falling on the spot and fixes the item 22 mm from the detector.
2. **Illuminate and read.** On a button press the firmware pulses each of eight LEDs in turn (850, 940, 1,050, 1,200, 1,300, 1,450, 1,550 and 1,650 nm; WSC-DDR-001 D4). Each band reading sits between two dark readings, so slow changes in ambient light are subtracted. A transimpedance amplifier with 47 k Ω feedback and a 24-bit ADC take four conversions per reading. Eight bands and nine darks take about 240 ms.
3. **Normalize.** Readings are divided by the last white reference taken in the calibration cap, giving a reflectance per band that is independent of LED aging and, to first order, temperature. A board temperature reading flags drift of more than 5 %, which takes about 12.5 °C of change.
4. **Classify.** A small classifier on the ESP32-S3 (linear discriminant analysis or a small decision tree on normalized band ratios; WSC-DDR-001 D5) returns a resin and a confidence. Below the confidence threshold, or when mean reflectance is under about 0.08 (black items), it shows "unknown".
5. **Show and log.** The display shows resin code, name, color and icon, plus the grade from the local price table. Each scan is logged as a 64-byte record for export over USB as CSV or JSON Lines.
6. **Hand off.** Unknown or low-confidence items can be photographed with a phone and passed to WasteWise-ml. The shared record proposed in WSC-DDR-002 lets the two results be joined on a pair ID.

WasteWise Scan: item flow per 100 mixed plastic items (all values estimates)

CONCEPT, NOT FOR FABRICATION

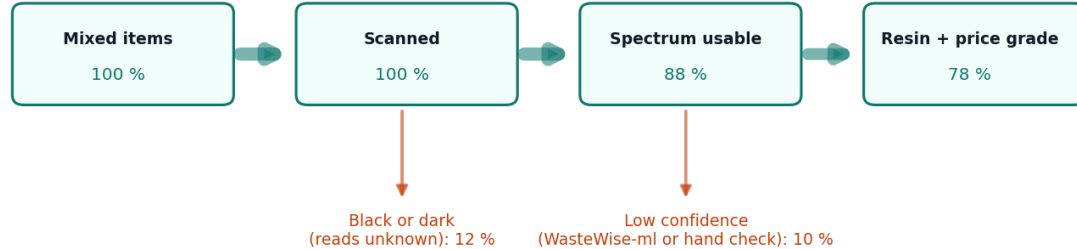


Figure 2. Item flow per 100 mixed plastic items. All values are estimates for concept review.

■ Main components

Table 1. Main components. Numbers match the BOM, the exploded view and drawing WSC-DWG-001.

#	Component	Choice	Notes
1	Top shell	3D-printed PETG with display window and button hole	Sealed with a gasket to the bottom shell; about 48 g
2	Controller and display	ESP32-S3 board with 1.9 in IPS display and on-board Li-ion charger (LilyGO T-Display-S3 class)	No custom PCB (WSC-DDR-001 D3)
3	LED ring	Eight LEDs on a 20 mm pitch circle in a printed holder, each tilted about 23° so the beams meet on the item	SWIR LEDs dominate cost
4	Photodiode	InGaAs PIN photodiode, 1 mm, TO-46, about 900 to 1,700 nm, inside a short baffle tube	Standard InGaAs, cutoff near 1,700 nm
5	Amplifier and ADC	Low-noise op-amp transimpedance stage with 47 k Ω feedback, 24-bit ADC (ADS1220 class), LED switches	On perfboard for the first build
6	Window	Borosilicate glass disc, 25 mm, 2 mm	Keeps dust out; uncoated
7	Light shroud	Black TPU cone, 18 mm deep, 42 mm across the rim, 36 mm inside	Blocks direct light, sets distance
8	Battery	One protected 18650 Li-ion cell, 3,000 mAh	WSC-DDR-001 D7
9	Cell holder and USB-C	Printed cradle, protection wiring to the board charger, USB-C socket in the tail wall	Must hold the cell against about 550 N on a corner drop
10	Bottom shell and grip	3D-printed PETG, textured grip, window seat	About 47 g
11	Scan button	Large sealed 16 mm push button for gloved hands	
12, 13	Calibration cap	Printed cap, 48 mm OD, with a 38 mm white PTFE reference disc; stores over the shroud	White reference (WSC-DDR-001 D6)

WasteWise Scan: exploded view

CONCEPT, NOT FOR FABRICATION

- 1 Top shell
- 2 ESP32-S3 display board
- 3 LED ring, 8 NIR bands
- 4 InGaAs photodiode
- 5 Amplifier and ADC board
- 6 Borosilicate window
- 7 Black TPU light shroud
- 8 18650 Li-ion cell
- 9 Cell holder and USB-C
- 10 Bottom shell and grip
- 11 Scan button
- 12 Calibration cap
- 13 White PTFE reference disc

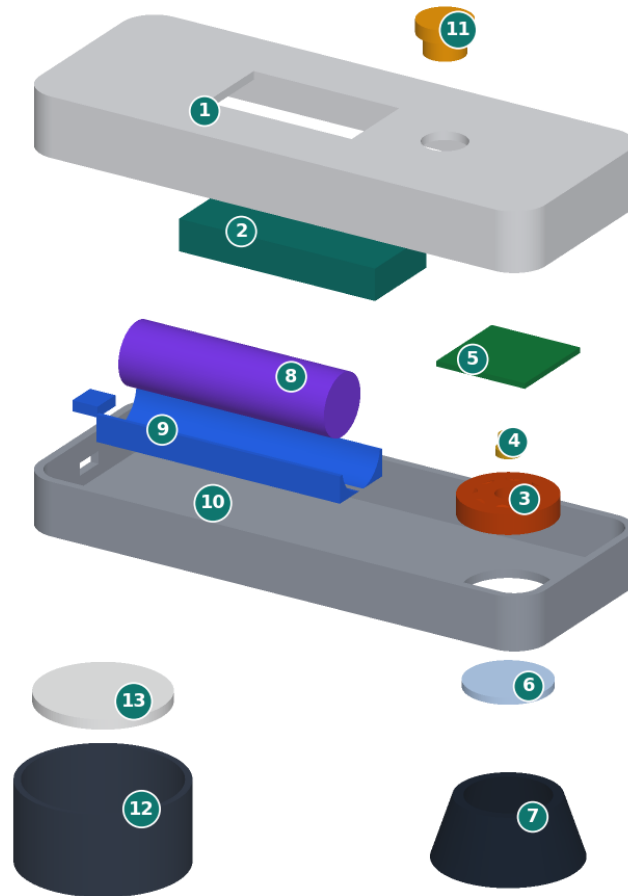


Figure 3. Exploded view with BOM numbers.

■ Key numbers

All values are from WSC-CAL-001 (tags in brackets) and rest on the assumptions stated there.

Table 2. Key numbers.

Quantity	Value	Requirement
Scan time	about 0.33 s [E2]	R2 (1.5 s) met
Detected signal on the white reference	0.35 to 5.2 μ W, 10 to 115 mV at 47 k Ω [C2]	
Worst signal-to-noise ratio in shade	about 450 (clear item, 1,650 nm) [C4]	R1 needs about 200
Sunlight through a clear item	about 23 μ A, about 900 times the weakest signal [D1, D3]	R4 not met for clear items
Average power	about 0.39 W [F2]	
Battery life	about 22 h [F2]	R5 (8 h) met
Log capacity	about 131,000 scans at 64 B [G1]	R9 met
Mass	about 202 g, 222 g with cap [A3]	R6 (250 g) met
Size	160 x 62 x 34 mm (6.3 x 2.4 x 1.3 in), 55 mm high with button and shroud [A1]	R6 met
Display contrast in 100 klx sun	about 1.6:1; 5.2:1 shaded [I1, I2]	R7 not met
LED irradiance at 200 mm	3.9 W/m ² against 100 W/m ² [H2]	R14 met by estimate
Parts cost	\$163.00 [K1]	R12 met for the prototype; \$150 volume target

■ Key design choices

- **Discrete LEDs and one InGaAs photodiode rather than a spectrometer or a visible-range chip** (WSC-DDR-001 D1). A SWIR spectrometer module costs far more than the budget; a visible-range chip misses the polymer bands. Eight bands are kept because the six-band option (D2) needs a band study on reference spectra that has not been done.
- **Contact measurement through a shroud.** Pressing on the item fixes the geometry and removes direct light on the spot. WSC-CAL-001 shows that it does not stop light passing through clear items, which is the main open technical problem.
- **Low gain and interleaved darks.** The 47 k Ω gain keeps sunlight through clear items inside the ADC range; interleaved dark readings cancel slow ambient changes. Faster changes still need one of the options in `docs/REVIEW.md`.
- **Say "unknown" rather than guess.** A wrong call can contaminate a bale; the confidence threshold is set for few false results, accepting more unknowns (R3).
- **White reference in the protective cap** (D6). The user calibrates by pressing the scanner into its own cap, at the start of a shift and again when the drift warning shows.
- **Local price table on the device.** Grades are what matter to users, and prices are local and change often. The cooperative edits them; no cloud service is needed.

- **One common 18650 cell (D7).** Available and replaceable in most markets; the board's charger keeps the build simple.

WasteWise Scan: cutaway

CONCEPT, NOT FOR FABRICATION

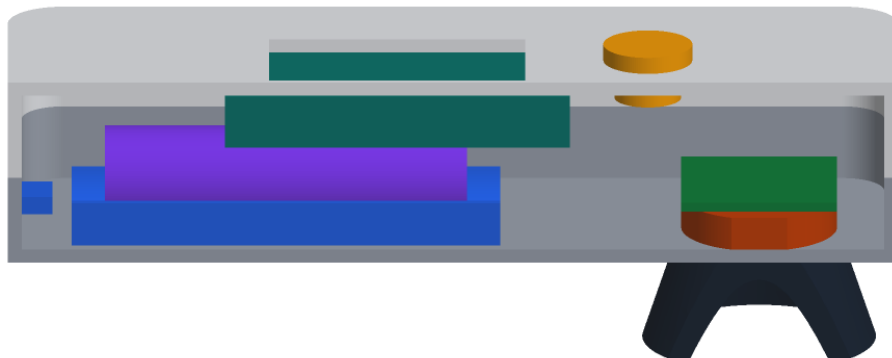


Figure 4. Cutaway: LED ring, photodiode, amplifier board and window above the shroud, with the cell and controller behind.

■ Findings from the calculations

- **Clear items in sun (R4 not met).** Light passing through a clear or translucent item reaches the detector from inside the shroud. It no longer saturates the amplifier at 47 k Ω , but hand movement changes it faster than dark subtraction can follow.
- **Display in direct sun (R7 not met).** A 400 cd/m² IPS screen washes out in 100 klx sun.
- **Window crosstalk.** LED light reflected by the window's outer surface reaches the detector at about the same level as the item signal. It can be removed with an open-air reading, but window dirt changes it.
- **PE versus PP (R1 at risk).** The 1,650 nm band is clipped by the detector cutoff and only samples the short edge of the 1,650 to 1,750 nm region.

Options for each are listed in `docs/REVIEW.md` as proposed, awaiting Amish.

■ Safety

Safety: The scanner identifies plastic resin only. It must never be used to judge whether an item is safe to handle, or to classify hazardous, medical, chemical or pesticide containers. Waste handling carries cut, needle-stick and chemical risks: wear gloves and follow local guidance.

Safety: The 18650 lithium-ion cell stores about 11 Wh. Use a protected cell from a known supplier, charge with the board's charger only, do not charge in direct sun or above 45 °C, and stop using a cell that is dented, swollen or wet. The cradle must hold the cell firmly in a drop. Do not leave the device on hot surfaces or in closed vehicles.

Safety: The SWIR LEDs are invisible to the eye, so a user cannot tell when they are on. In normal use they fire for about 14 ms each per scan, which keeps emission far inside the IEC 62471 exempt group by estimate (WSC-CAL-001, H). An LED stuck on at the shroud rim could exceed the corneal limit over long exposures, so the LED drivers need a hardware limit on on-time that firmware cannot override. Do not look into the window during a scan.

- Black and dark items read "unknown". Users must not treat "unknown" as any particular resin.
- The result is advice for sorting, not a certificate of material grade for sale.

■ Open questions

1. **First users and region** for co-design and the first price table. Proposed, awaiting Amish (WSC-DDR-001 O1).
2. **Who the \$150 volume target is for:** cooperatives or individual pickers. Proposed, awaiting Amish (O2).
3. **Extended InGaAs band.** Whether to add a 1,700 to 1,750 nm band to separate PE from PP. Proposed, awaiting Amish (O3).
4. **Scan record format** shared with WasteWise-ml and ReflowEconomy. Draft in WSC-DDR-002; proposed, awaiting Amish (O4).
5. **Sunlight, display and crosstalk options** raised by WSC-CAL-001. See `docs/REVIEW.md`.

Concept media: [blueprint sheet](#), [interactive 3D model](#). General arrangement: [WSC-DWG-001](#).