



CONCEPT, NOT FOR FABRICATION

WaterWalker · github.com/BoujeeEnjinia1701/waterwalker


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the parametric model (WWK-CAL-001)	2026-09-25	AC
P2	1.2 mm main wall, thinner cradle, parking lock pin (WWK-DDR-002)	2026-09-25	AC

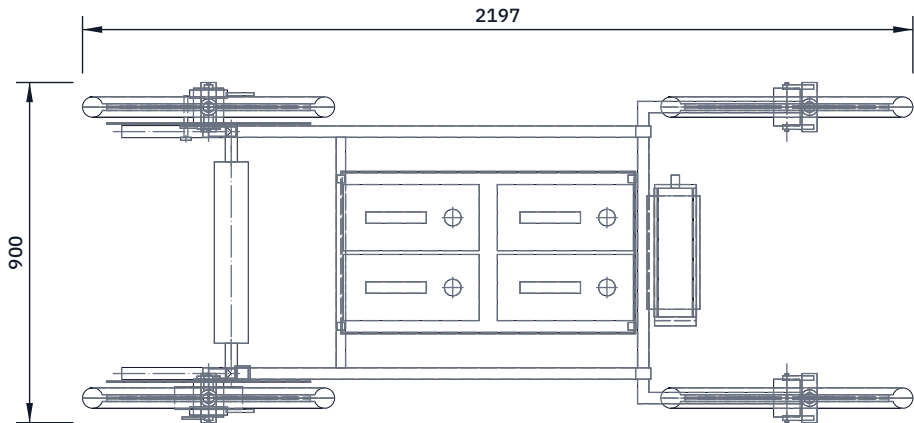


TOP VIEW
Scale 1:20; looking down (along -Z)

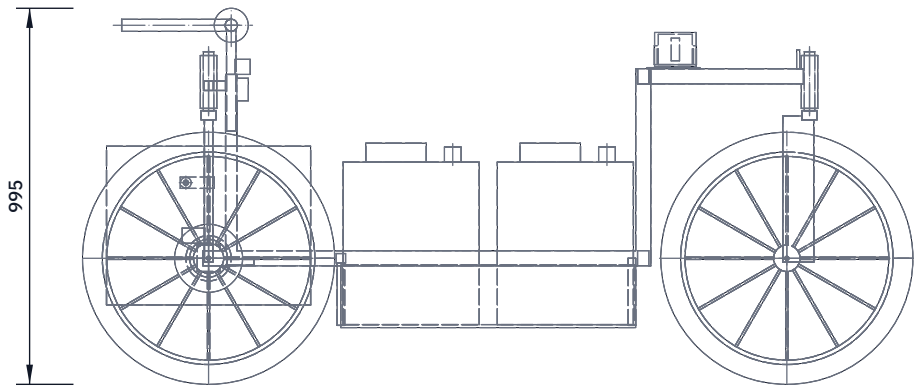

FRONT VIEW
Scale 1:20; looking at the front (along +Y)

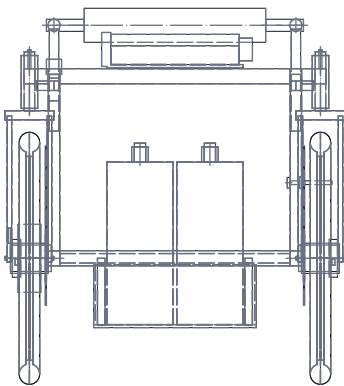

RIGHT VIEW
Scale 1:20; looking at the right side (along -X)

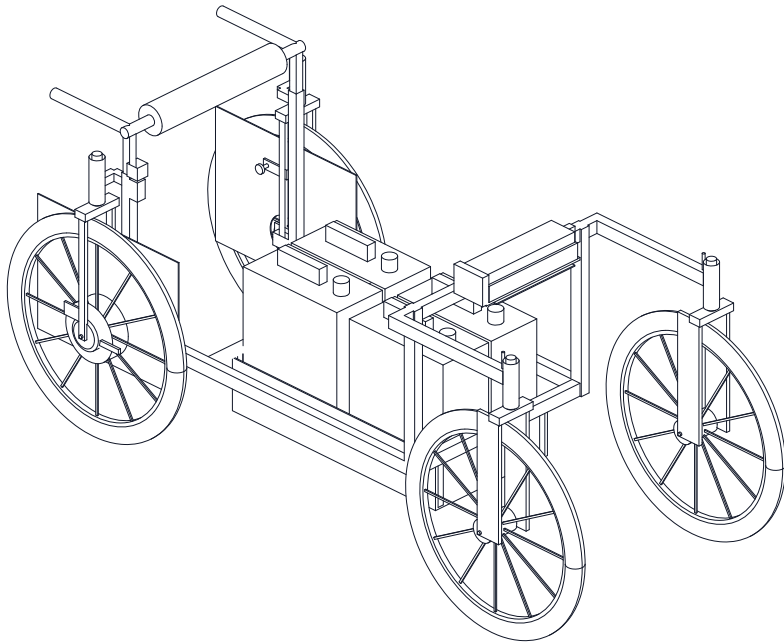

ISOMETRIC VIEW
Not to scale; assist kit shown fitted; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND NOTES

- Track 770; wheelbase 1530; caster trail 60
- Overall width 898 over axle nuts (R6 900 max)
- Clear walking width 610 between rails (R7 600 min)
- Wheels 26 in, ETRTO 559, 2.1 to 2.4 in tires, 100 mm hubs
- Rear wheels in fixed forks; front forks swivel, lock pin
- Caster sweep R400; 20 clear of front risers
- Hip bar 850 to 1050 above ground; open rear entry
- Cradle 780 x 430, floor 150 above ground
- Lift over side rail 364 (R8 450 max)
- Main tube RHS 40 x 30 x 1.2; cross 25 x 25 x 1.5
- Parking lock pin, 10 mm, through left rear spokes
- Assist kit (items 9 to 11, 13) is optional, later:
 - SwapCell interface v0.3, class V1 receiver
- Empty 37.4 kg; loaded 122 kg (WWK-CAL-001 v0.2)
- PRELIMINARY, NOT FOR FABRICATION

WATERWALKER				github.com/BoujeeEnjinia1701/waterwalker			
General arrangement, walk-inside water carrier							
DRAWING NO. WWK-DWG-001			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 		DATE 2026-09-25		DRAWN Amish Chadha	
MATERIAL / NOTES Mild steel tube frame; 26 in bicycle wheels and forks; plywood cradle. See bom/bom.csv							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	