



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

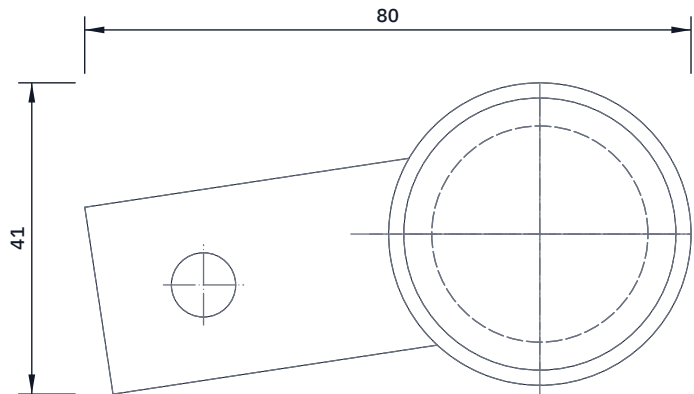


TOP VIEW
Scale 1:1; looking down (along -Z)

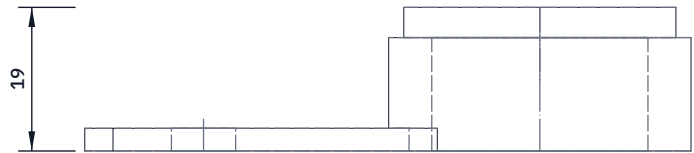

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

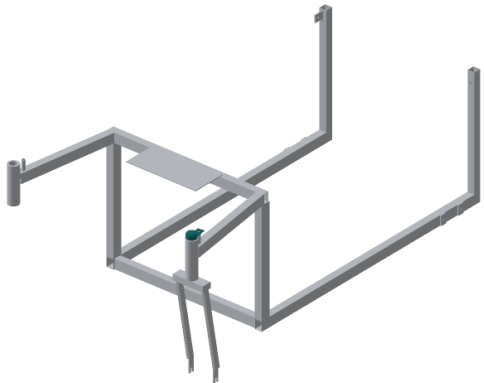

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 59 x 25 x 3 mm, one end rounded to the collar's outside.

Drill 8.5 mm, 45 from the collar centre on the plate centre line.

Weld the plate flat to the underside of the collar, pointing away from the clamp bolt; keep the bore free of spatter.

Fit: the collar sits on the top headset cup with a 2 mm spacer, its bolt clamps the steerer; the top cap and its bolt above set the headset preload before the collar is tightened.

Front: turn the collar so the hole lines up over the pin guide with the wheel trailing straight back; the pin drops in to lock.

Rear: same, wheel straight ahead; the pin stays in, R-clipped.

Check: with the pin out the fork turns freely and does not knock.

WATERWALKER

github.com/BoujeeEnjinia1701/waterwalker

WaterWalker lock collar with lock plate (make 4): making sketch

DRAWING NO. WWK-DWG-104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Bought 40 mm clamp collar for 28.6 mm; steel plate 3 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	