
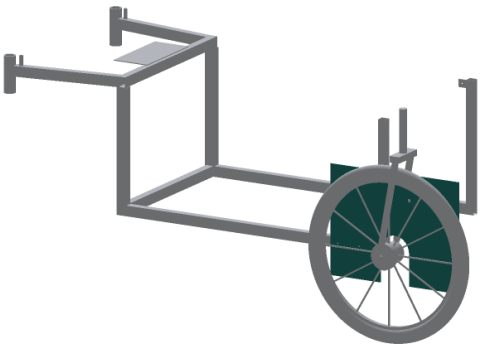
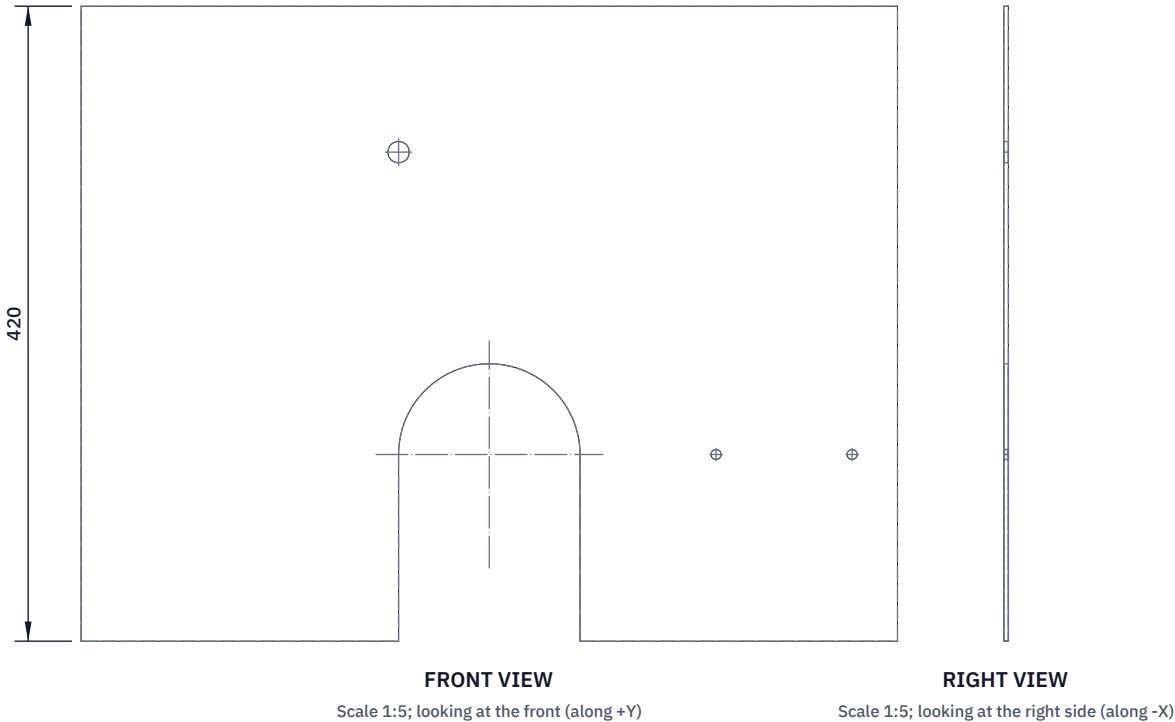


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

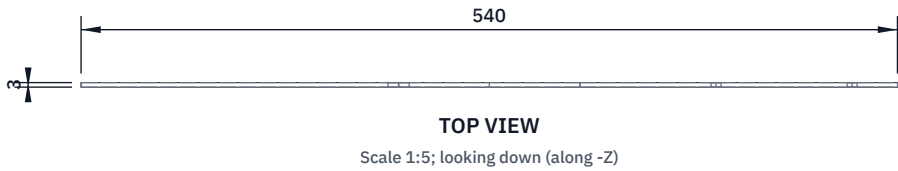

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 540 x 420; round the corners to about 20 mm.

Slot for the hub: 120 wide from the bottom edge up to the axle centre (123.5 up from the bottom edge), ending in a 60 radius.

Two 6.6 mm holes for the rail tabs, 123.5 up from the bottom edge, 150 and 240 ahead of the axle line.

Left guard only: a 14 mm hole for the lock pin, 60 behind the axle line, 323.5 up from the bottom edge.

Make the right guard as a mirror image without the pin hole.

Fit: flat against the guard tabs on the rail, 5 mm outside the rail; two clips on the inner blade, 450 and 600 above ground.

Fit it before the wheel: the hub goes up into the slot.

Check: 15 mm or more from the spokes all round.

WaterWalker skirt guard (make 2, mirror): making sketch

DRAWING NO. WWK-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES HDPE sheet 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	