




CONCEPT, NOT FOR FABRICATION

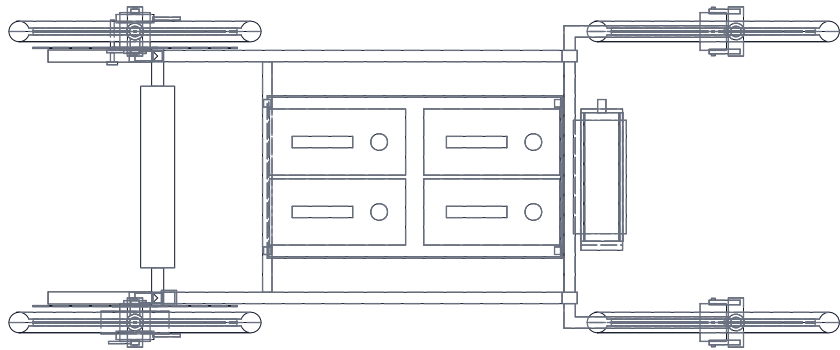

TOP VIEW
Scale 1:20

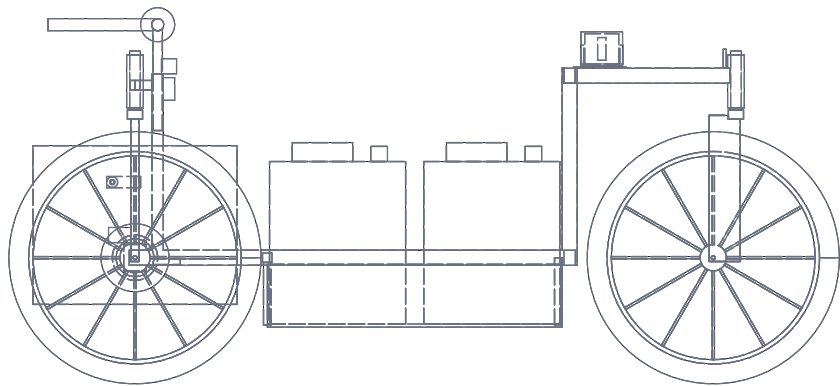


FRONT VIEW
Scale 1:20

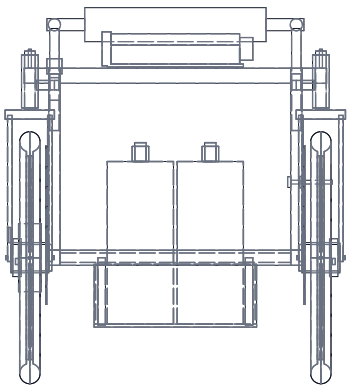

RIGHT VIEW
Scale 1:20

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the parametric model (WWK-CAL-001)	2026-09-25	AC
P2	1.2 mm main wall, thinner cradle, parking lock pin (WWK-DDR-002)	2026-09-25	AC

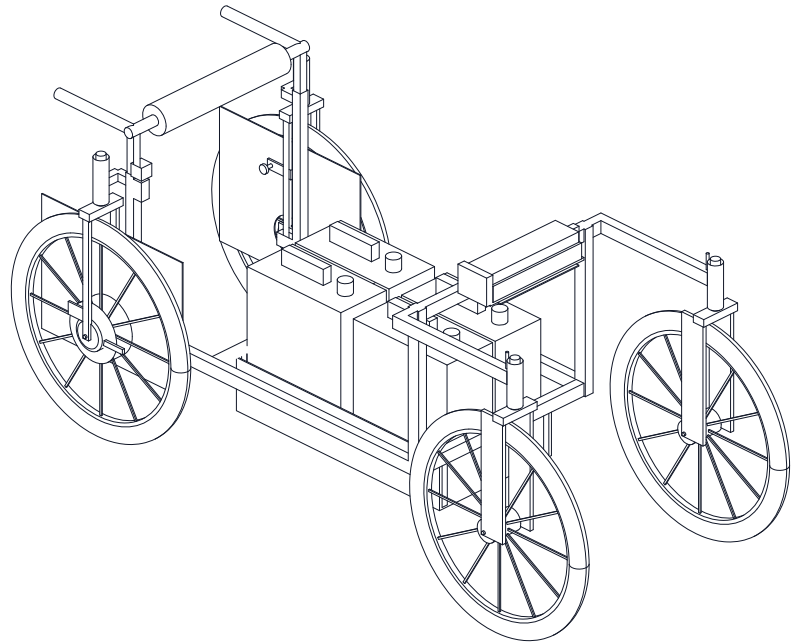

ISOMETRIC VIEW
Not to scale; assist kit shown fitted

KEY DIMENSIONS (MM) AND NOTES

Track 770; wheelbase 1530; caster trail 60
Overall width 898 over axle nuts (R6 900 max)
Clear walking width 610 between rails (R7 600 min)
Wheels 26 in, ETRTO 559, 2.1 to 2.4 in tires, 100 mm hubs
Rear wheels in fixed forks; front forks swivel, lock pin
Caster sweep R400; 20 clear of front risers
Hip bar 850 to 1050 above ground; open rear entry
Cradle 780 x 430, floor 150 above ground
Lift over side rail 364 (R8 450 max)
Main tube RHS 40 x 30 x 1.2; cross 25 x 25 x 1.5
Parking lock pin, 10 mm, through left rear spokes
Assist kit (items 9 to 11, 13) is optional, later:
SwapCell interface v0.3, class V1 receiver
Empty 37.4 kg; loaded 122 kg (WWK-CAL-001 v0.2)
PRELIMINARY, NOT FOR FABRICATION

WATERWALKER

General arrangement, walk-inside water carrier

DRAWING NO. WWK-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel tube frame; 26 in bicycle wheels and forks; plywood cradle. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	