
# SomudTick grey box, GAME BOY layout - FRONT FACE (outside of the half with the 2 short posts)

the 2 short posts are at the TOP (as in layout 4). Print at 100 % (Actual size). Check both 100 mm lines.

solid line = final size, dashed line = cut this first, + = centre (drill a 2.5 pilot there first)

blue = openings  red = M3 screws  gray = boards behind / posts inside  purple = looks only (no cutting)

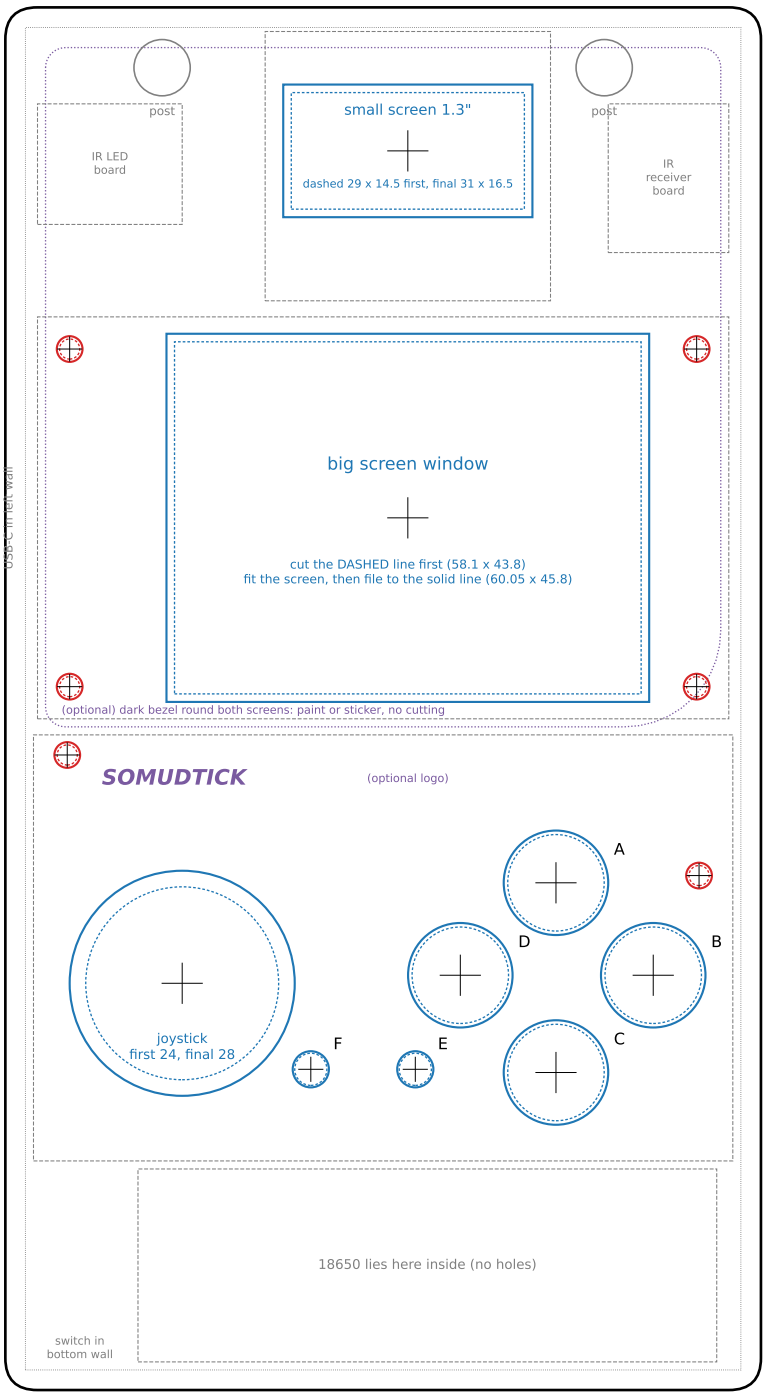


100 mm (check this one too)


100 mm (measure it: if it is not 100, the print is scaled - print again at 100 %)

**ONLY for a printer that shrank the normal file to 94 mm: this file is drawn 106.3 % big**


# SomudTick grey box, GAME BOY layout - WALLS of the front half (1:1)

z = from the FACE side edge. Every wall hole is under 15 mm (the halves meet at 16).


## LEFT wall

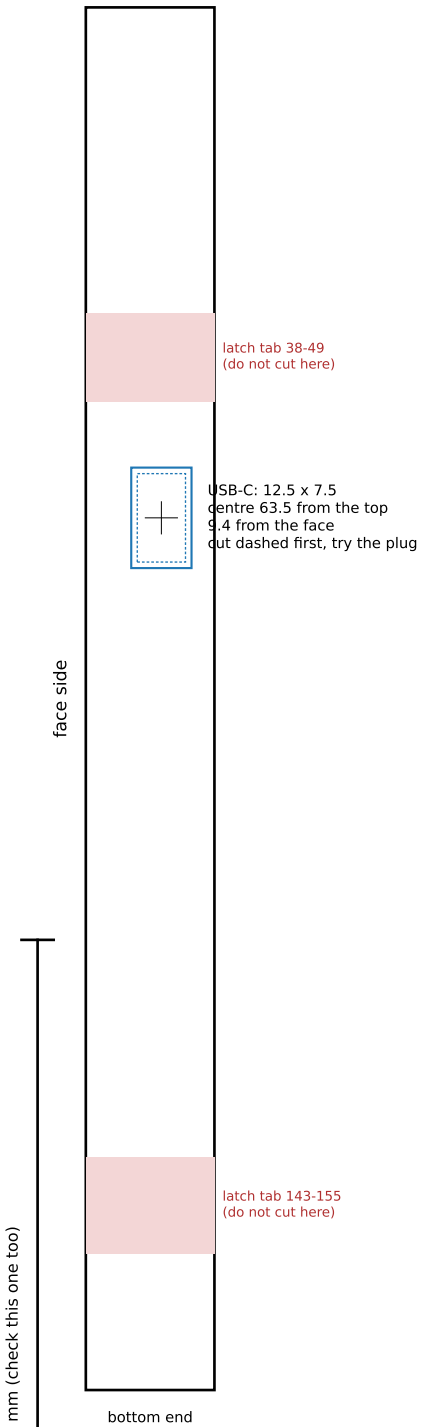


## TOP wall (post end), seen from above

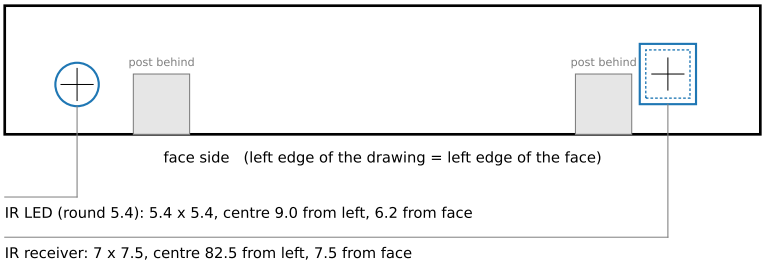



## BOTTOM wall, seen from below

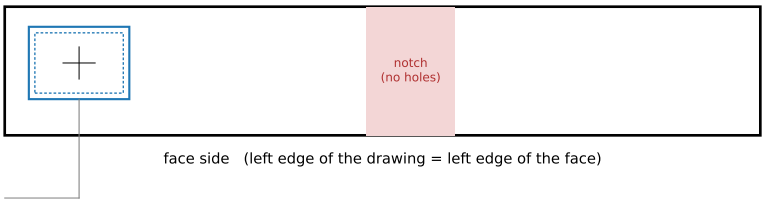


Box as measured: 94 x 172, closed 34.5. Front half 16 outside / 14 inside, back half 19 / 16.5.
The 2 short posts are at the TOP (as in layout 4).

IR: drill these two LAST, after the IR boards are in, so the LED and the receiver sit right in the holes (bend the LED legs up to the mark).
Switch: cut the dashed slot, push the switch in, file until it clicks in.
Back half: cut post 8 down to 4.5 mm (the battery lies under it).




100 mm (measure it: if it is not 100, the print is scaled - print again at 100 %)

**ONLY for a printer that shrank the normal file to 94 mm: this file is drawn 106.3 % big**

# SomudTick grey box, GAME BOY layout - BACK HALF (seen from the BACK, outside)

the end with the 2 screw holes is at the TOP of this page. Only the speaker grille to drill.

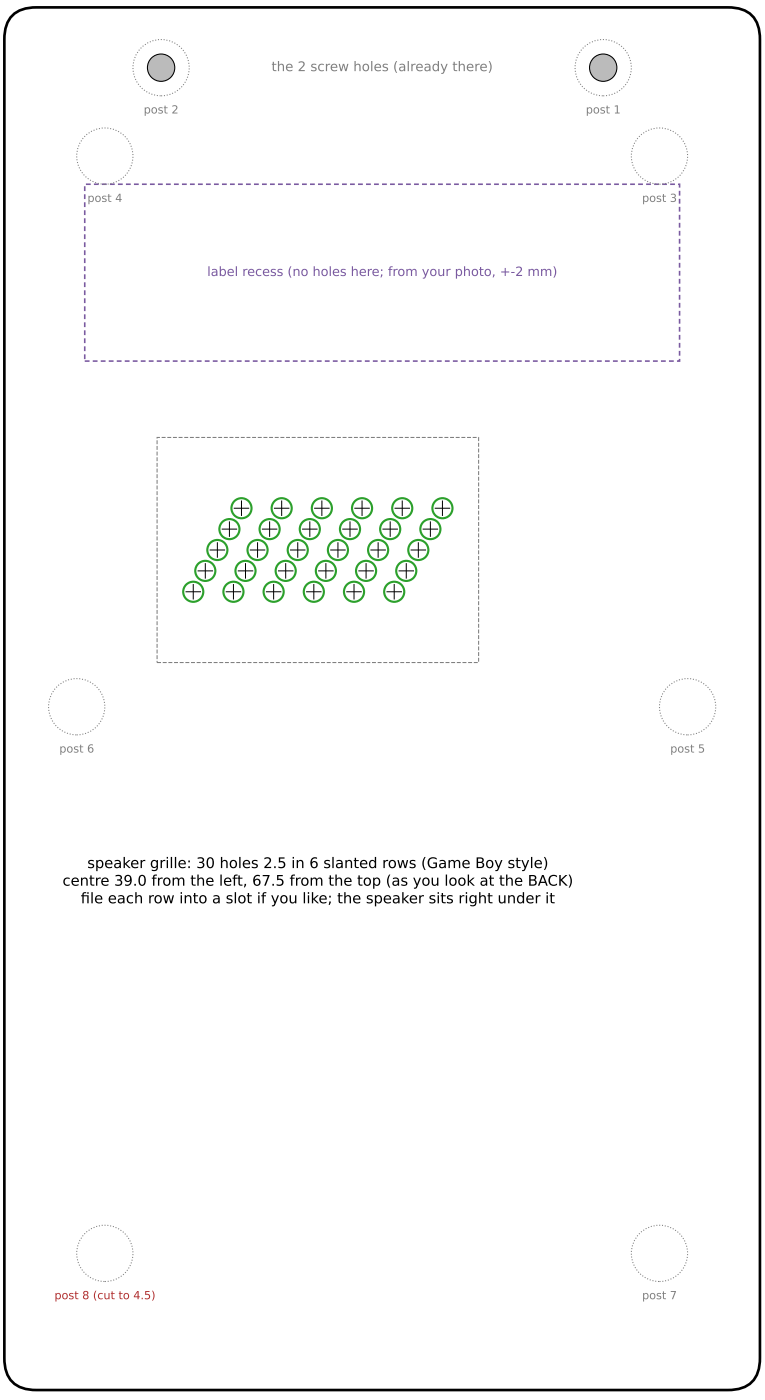


speaker grille: 30 holes 2.5 in 6 slanted rows (Game Boy style)
centre 39.0 from the left, 67.5 from the top (as you look at the BACK)
file each row into a slot if you like; the speaker sits right under it

100 mm (check this one too)

100 mm (measure it: if it is not 100, the print is scaled - print again at 100 %)

**ONLY for a printer that shrank the normal file to 94 mm: this file is drawn 106.3 % big**