REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

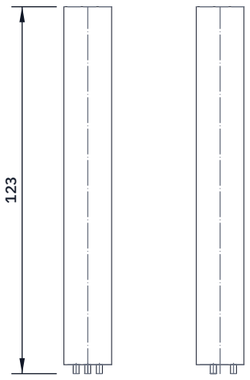

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

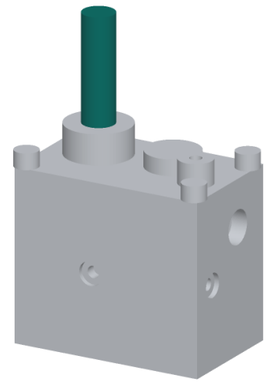

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: 120 mm of 16 mm PVC conduit. Electrodes on a 9 mm circle,
120 degrees apart, standing 3 mm proud of the tip:
working: 2 mm graphite rod (pencil lead class), polished flat;
reference: chlorided silver (Ag/AgCl) wire; counter: stainless wire.
Solder each lead to a core of a shielded 3-core cable.
Hold the electrodes in a printed jig and pot the bottom 20 mm of the
tube in epoxy; seal the top round the cable with heat shrink.
Wet the tip, sand the graphite face with 1200 grit before use.
Fit: through the M25 gland in the cell lid; tip 40 mm below the
top of the body, clear of the walls and the beam.
Check: electrodes isolated from each other (over 10 megohm dry).

WATERWATCH github.com/BoujeeEnjinia1701/waterwatch

WaterWatch free chlorine sensor: making sketch

DRAWING NO.	REV	SHEET	SIZE
WWT-DWG-108	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

PVC conduit 16 mm OD; graphite rod, Ag/AgCl wire, stainless wire; epoxy

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand