



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

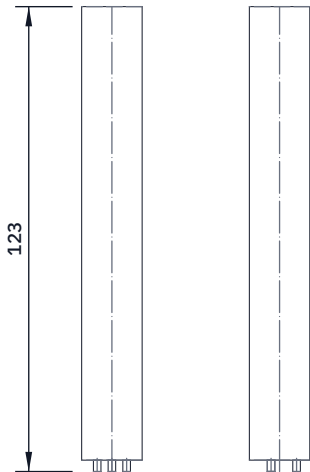


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

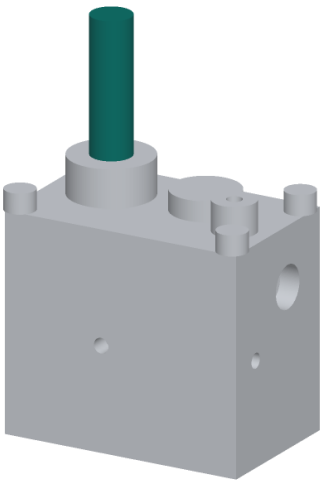

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: 120 mm of 16 mm PVC conduit. Electrodes on a 9 mm circle, 120 degrees apart, standing 3 mm proud of the tip:
working: 2 mm graphite rod (pencil lead class), polished flat;
reference: chlorided silver (Ag/AgCl) wire; counter: stainless wire.
Solder each lead to a core of a shielded 3-core cable.
Hold the electrodes in a printed jig and pot the bottom 20 mm of the tube in epoxy; seal the top round the cable with heat shrink.
Wet the tip, sand the graphite face with 1200 grit before use.
Fit: through the M25 gland in the cell lid; tip 40 mm below the top of the body, clear of the walls and the beam.
Check: electrodes isolated from each other (over 10 megohm dry).

WATERWATCH

github.com/BoujeeEnjinia1701/waterwatch

WaterWatch free chlorine sensor: making sketch

DRAWING NO. WWT-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PVC conduit 16 mm OD; graphite rod, Ag/AgCl wire, stainless wire; epoxy					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand