BATTERY INPUT - 2S-6S (6.5-26 V), 15 A fused, reverse-polarity protected, V / I monitored

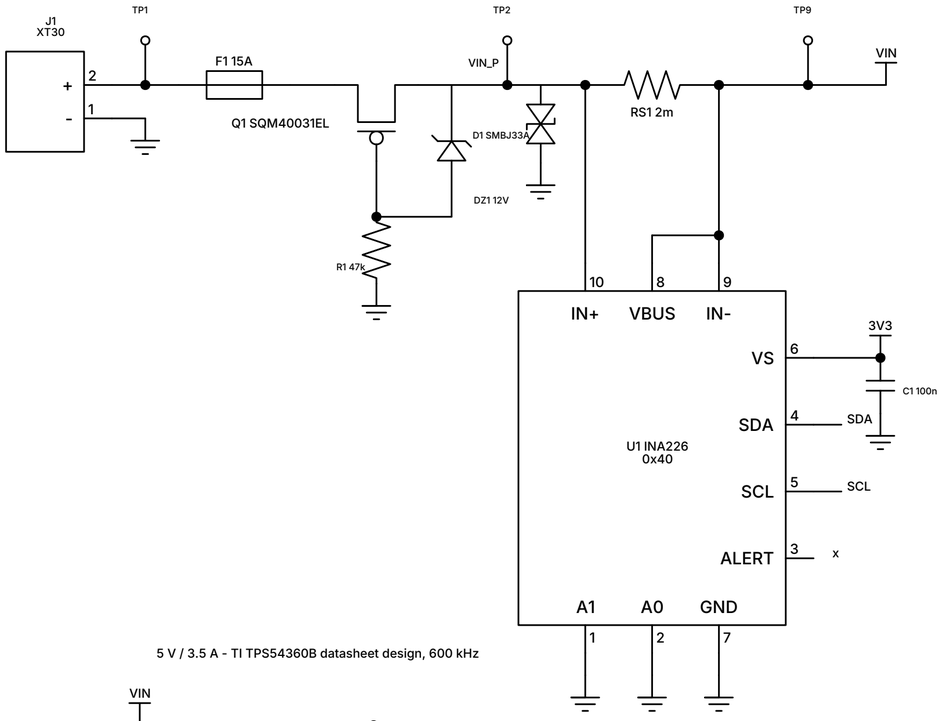

5 V / 3.5 A - TI TPS54360B datasheet design, 600 kHz

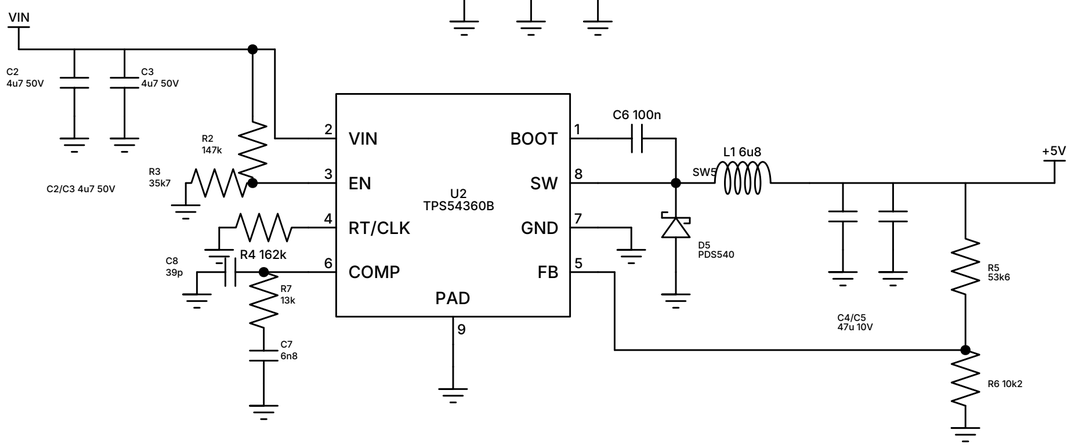

6.0 V / 5 A servo rail (Mode A) - TI TPS54560B, 500 kHz

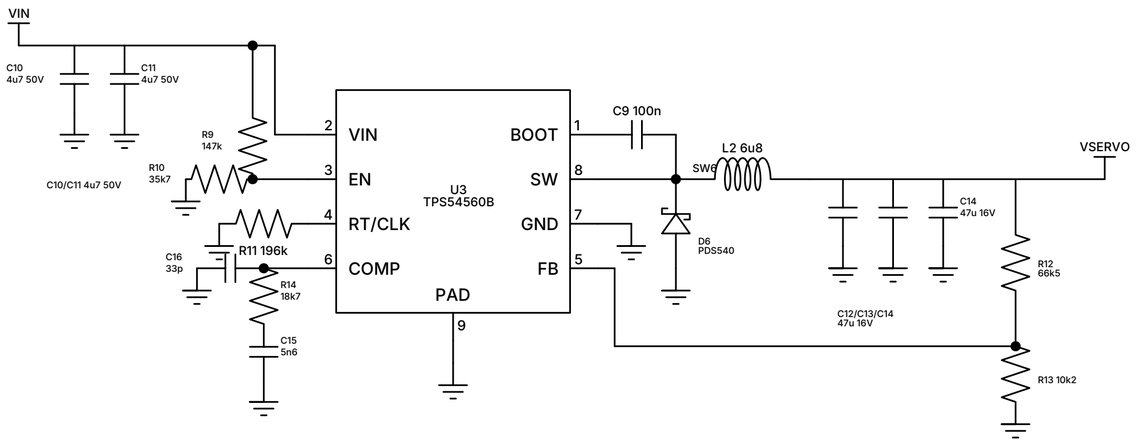

+5 V feeds: MCU, radios, GPS, CAN, servo buffer, LEDs, 3V3 LDOs

SERVO BEC INLET (Mode B: 12 A, up to 8.4 V)

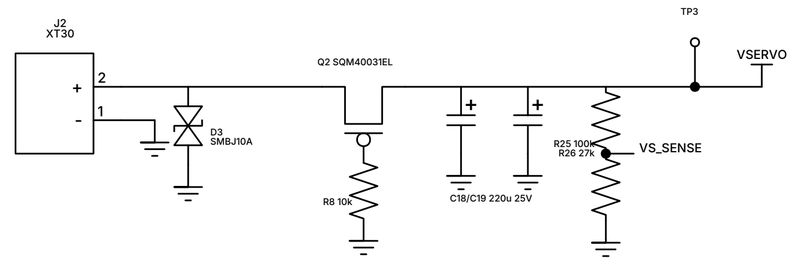

RAIL TEST POINTS



NOTES

1. Q1 / Q2 conduct only with the battery the right way round (body diode, then the gate pulled low); DZ1 holds VGS inside +-20 V on 6S + transients.
2. RS1 -> INA226: 81.92 mV full scale = 41 A; Kelvin lines to the shunt pads.
3. Mode A: U3 fitted, nothing on J2. Mode B: leave L2 off, BEC on J2.
4. Both bucks: UVLO on at 6.0 V. The 5 V rail is sized for RFD900x bursts (1 A).
5. 6 V compensation from TI's equations (fco 28 kHz, 85 uF derated COUT).

POWER	
TWILIGHT-FC REV A (cad_bench/projects/twilight_fc.py)	
checked against the layout netlist	
SHEET 1 / 4	REV A
DATE 2026-10-12	SIZE A3