


CONCEPT, NOT FOR FABRICATION


WellSling · github.com/BoujeeEnjinia1701/wellsling

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the constructable TRL 3 model (WSL-DDR-002)	2026-10-03	AC

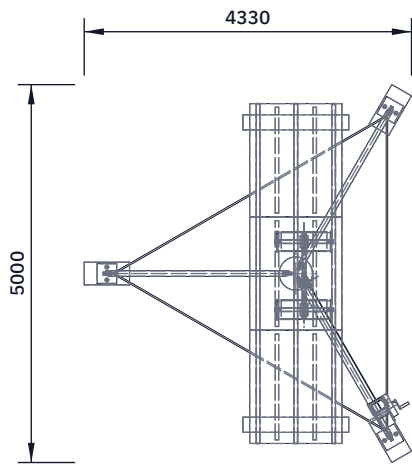


TOP VIEW

Scale 1:100; looking down (along -Z)

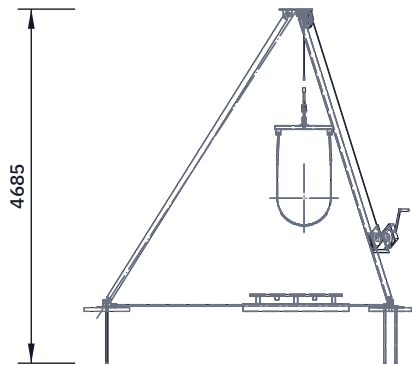


FRONT VIEW

Scale 1:100; looking at the front (along +Y)

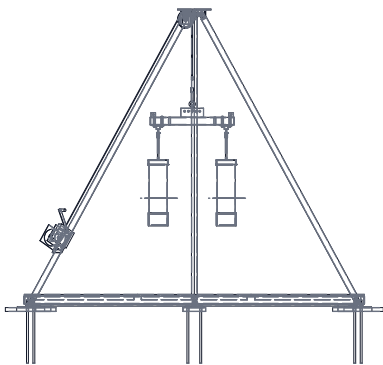

RIGHT VIEW

Scale 1:100; looking at the right side (along -X)

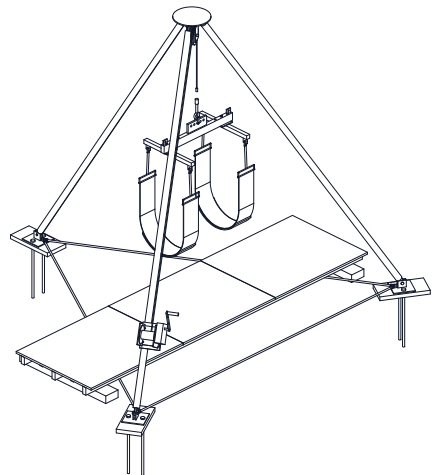

ISOMETRIC VIEW

Seen from the front right, above; well not shown

KEY DIMENSIONS (MM) AND DATA

Legs 76.1 x 3.6 tube, 4500 pin to pin, 32.1 deg from vertical

Feet on a 5000 circle; spans wells up to 3000 across

Head plate top 4000 above ground; sheave 200 pitch dia

Pads 600 x 300 x 50, two 25 stakes each

Spread chains 8 mm grade 80 between the three feet

Winch 1,000 kg with load brake, drum 900 up leg 1

Spreader beam RHS 100 x 50 x 4, 1100 long; bands 900 apart

Two plain webbing bands 240 wide, felt sleeves

Bridge: 3 runners RHS 100 x 50 x 3, 4500 long, on two bearers

Deck top 225; hooves 162 above it at the landing height

Safe working load 648 kg at the hook (600 kg animal)

Kit about 550 kg; heaviest piece 32 kg

PRELIMINARY, NOT FOR FABRICATION

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

Rim-worked animal lifting kit for open wells: general arrangement

DRAWING NO. WSL - DWG - 001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:100	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES S355 tube, RHS and plate, galvanised; hardwood; plywood; polyester webbing. See bom/bom.csv				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	