



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

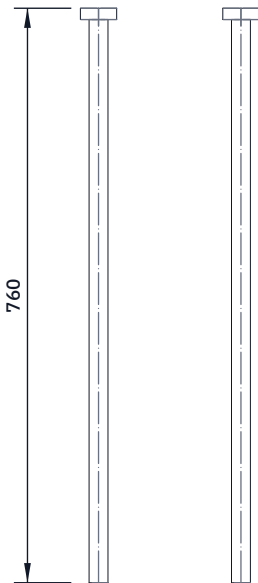


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

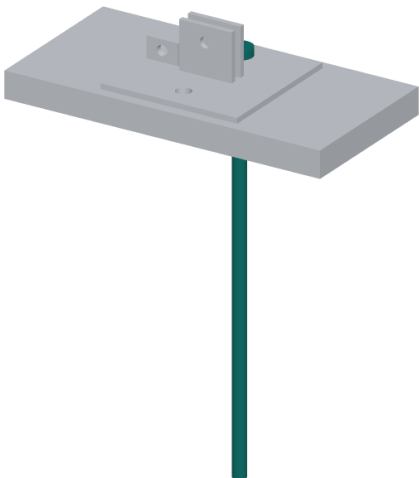

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make six. Cut 25 mm round bar 760 mm long.
Point one end: a 60 mm long taper, forged or ground.
Head: a 48 mm disc, 15 mm thick, centred on the other end, welded all round so a sledge cannot knock it off.
Two stakes go through each foot plate and pad and about 630 mm into the ground; the head rests on the foot plate.
Galvanise after welding.
Check: the stake slides through a 28 mm hole without force.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: ground stake (make 6)

DRAWING NO. WSL - DWG - 102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 25 mm round bar, S275; 48 mm round, 15 mm thick, for the head					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand