



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

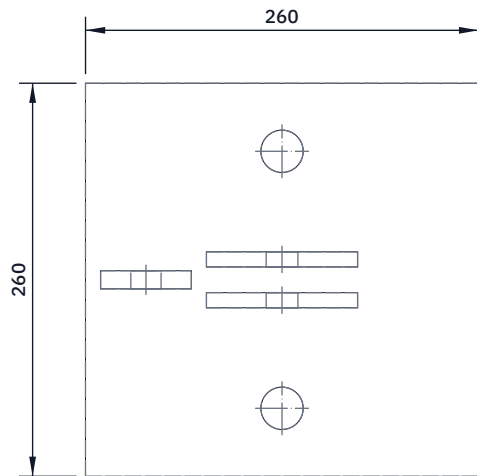


TOP VIEW

Scale 1:5; looking down (along -Z)

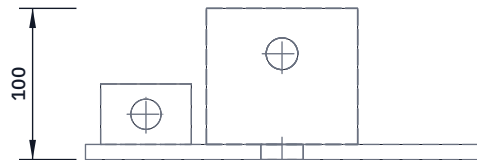


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

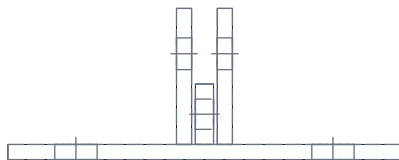

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

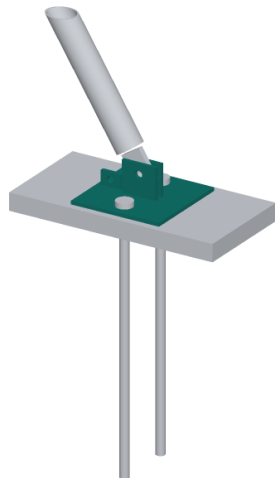

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make three. Base: 260 x 260 x 10 mm plate.
Two 28 mm stake holes on the cross centre line, 85 mm each side of the middle, to match the pad.
Leg lugs: two 100 x 90 x 10 mm plates standing on the base, centred, 17 mm apart (inside faces), running toward the well.
21 mm pin hole through both, 60 mm above the base top.
Drill the two lugs together after welding so the holes line up.
Chain eye: 60 x 40 x 12 mm plate standing on the inner edge, 10 mm in from it, in line with the lugs; 20 mm hole 20 mm above the base. The two spread chains shackle to it.
Fillet weld 6 mm all round; galvanise after welding.
Check: the leg tongue (16 mm) slides between the lugs and a 20 mm pin goes through all three holes by hand.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: foot plate (make 3)

DRAWING NO. WSL - DWG - 103		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 10 mm and 12 mm S275 plate, hot-dip galvanised				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	