


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

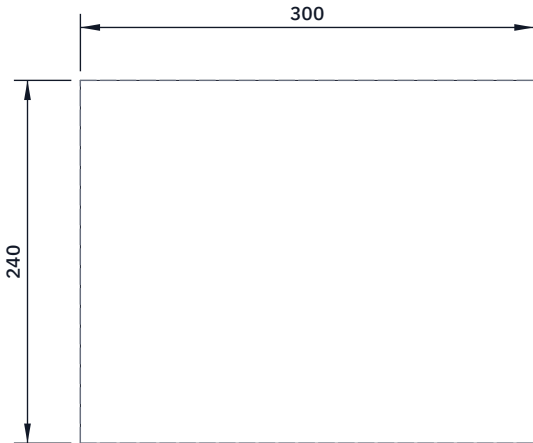


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

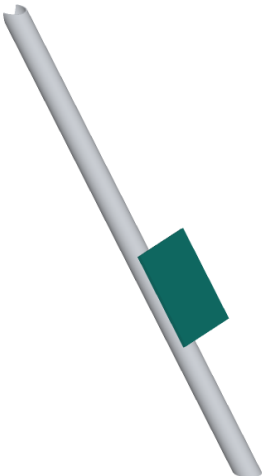

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Plate 300 x 240 x 10 mm.

Four 13 mm holes on a 160 mm square, centred on the plate, to suit the winch base (check against the winch bought).

It is welded flat on the outer face of leg 1 (the face away from the well), its 300 mm length along the leg, its middle 900 mm up the leg from the foot pin centre.

It sits 70 mm off the leg centre line, toward the side the winch handle will be on, so the drum lines up under the sheave.

Two 6 mm fillet welds along the leg, both sides, full length.

Weld before the leg is galvanised.

Check: the plate is flat and square to the leg within 1 mm.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: winch bracket on leg 1 (make 1)

DRAWING NO. WSL - DWG - 104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 10 mm S275 plate; four M12 x 40 grade 8.8 bolts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand