




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

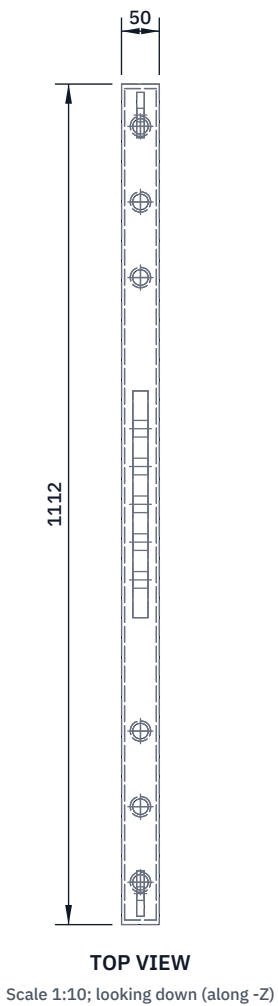


TOP VIEW
Scale 1:10; looking down (along -Z)



FRONT VIEW
Scale 1:10; looking at the front (along +Y)

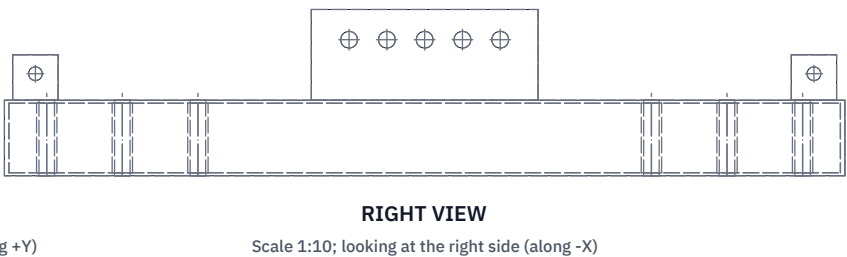

RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

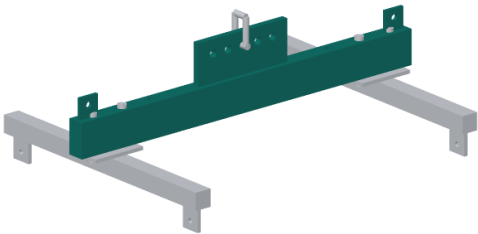

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. RHS 100 x 50 x 4 mm, 1,100 mm long, 100 mm side upright.

Sleeves: six 26.9 x 3.2 mm tubes, 100 mm long, through 27 mm holes in the top and bottom walls, 300, 400 and 500 mm each side of the middle; welded flush top and bottom.

Lift lug: 300 x 120 x 20 mm plate standing on top, centred, along the beam. Five 22 mm holes 50 mm apart, 40 mm below its top edge, so the hook point can move to balance the animal.

End caps 6 mm. Guide line eyes: 60 x 60 x 10 mm plates on top, 35 mm from each end, 18 mm hole.

Full-penetration weld on the lug; 6 mm fillets elsewhere.

Check: an M16 bolt passes each sleeve; lug square to the beam.

WELLSLING			github.com/BoujeeEnjinia1701/wellsling		
WellSling: spreader main beam (make 1)					
DRAWING NO. WSL - DWG - 107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES RHS 100 x 50 x 4 mm S355; tube 26.9 x 3.2 mm; 20, 10 and 6 mm plate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					