



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

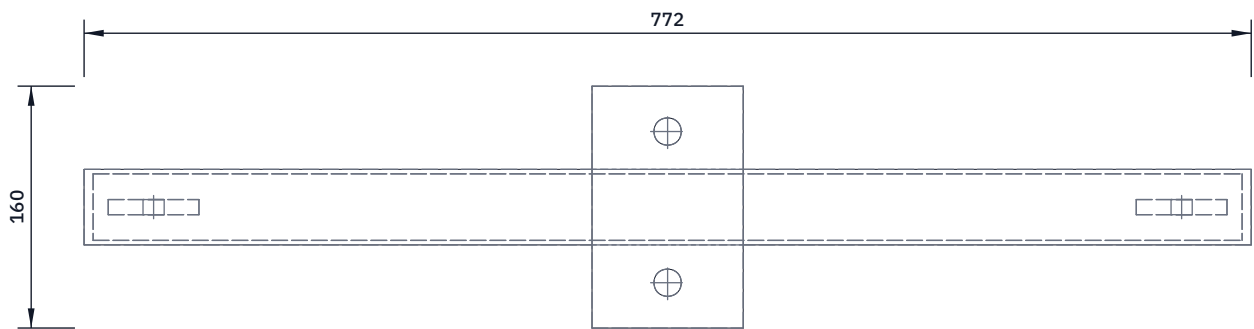


TOP VIEW

Scale 1:5; looking down (along -Z)

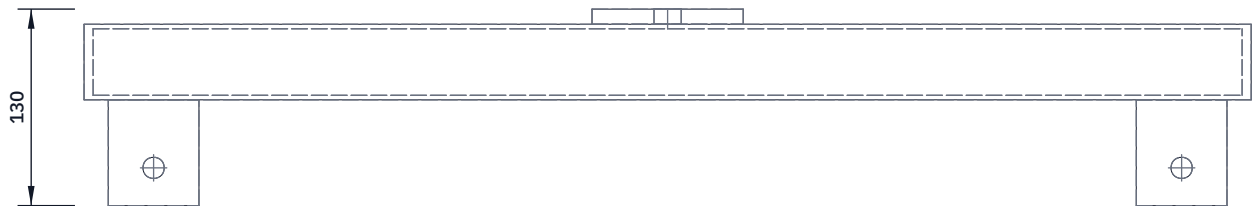

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

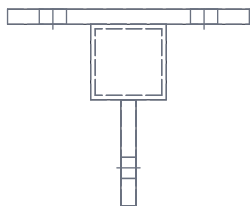

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. SHS 50 x 50 x 3 mm, 760 mm long, 6 mm end caps.

Top plate: 100 x 160 x 10 mm, centred on top, its 160 mm across the bar. Two 18 mm holes on the plate's long centre line, 50 mm each side of the bar centre line (100 mm apart).

Tip lugs: 60 x 70 x 10 mm plates hanging under each end, centred 40 mm in from the end, in line with the bar.

14 mm hole 25 mm above the lug's bottom edge.

6 mm fillet welds all round; galvanise.

It hangs under the main beam on two M16 bolts through the sleeves at 400 and 500 mm (or 300 and 400 for a calf).

Check: bolts pass plate and sleeves together by hand.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: spreader cross bar (make 2)

DRAWING NO. WSL - DWG - 108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES SHS 50 x 50 x 3 mm S355; 10 and 6 mm plate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	