
CONCEPT, NOT FOR FABRICATION


WellSling · github.com/BoujeeEnjinia1701/wellsling

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the constructable TRL 3 model (WSL-DDR-002)	2026-10-03	AC
P2	D3 model; 88.9 mm legs, chain eye fins, winch bracket, band end yokes (WSL-DDR-004)	2026-10-25	AC

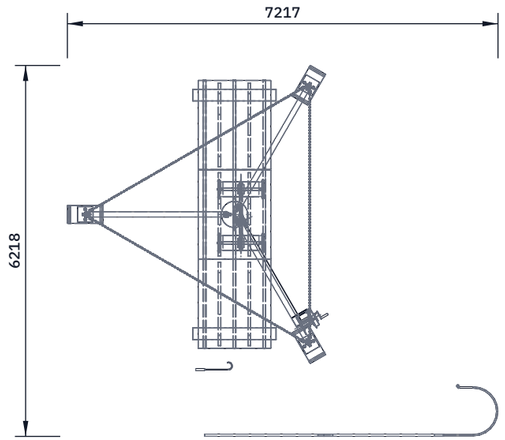


TOP VIEW

Scale 1:100; looking down (along -Z)

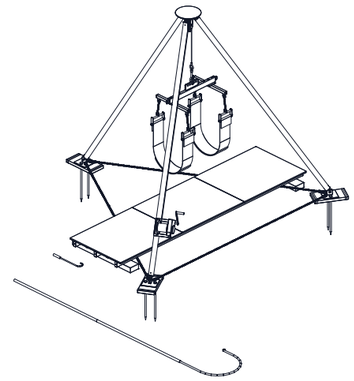


ISOMETRIC VIEW

Front right, above. Fasteners and weld beads not shown; seen from the front right and above, about 30 deg elevation

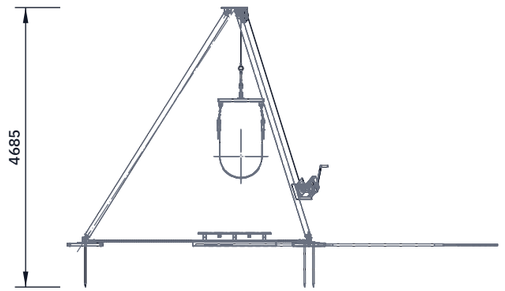

FRONT VIEW

Scale 1:100; looking at the front (along +Y)

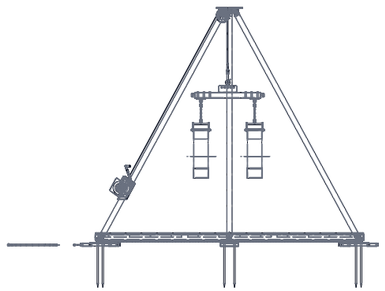

RIGHT VIEW

Scale 1:100; looking at the right side (along -X)

KEY DIMENSIONS (MM) AND DATA

Legs 88.9 x 3.2 tube, 4500 pin to pin, 32.1 deg from vertical
Feet on a 5000 circle; spans wells up to 3000 across
Head plate top 4000 above ground; sheave 200 pitch dia
Pads 600 x 300 x 50, two 25 stakes each
Spread chains 8 mm grade 80, one chain eye fin each
Winch 1,000 kg with load brake, drum 900 up leg 1
Spreader beam RHS 100 x 50 x 4, 1100 long; bands 900 apart
Two plain webbing bands 240 wide on band end yokes
Bridge: 3 runners RHS 100 x 50 x 3, 4500 long, on two bearers
Deck top 225; hooves 169 above it at the landing height
Safe working load 661 kg at the hook (600 kg animal)
Kit about 555 kg; heaviest piece 32 kg
PRELIMINARY, NOT FOR FABRICATION

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

Rim-worked animal lifting kit for open wells: general arrangement

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-001	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:100	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

S355 tube, RHS and plate, galvanised; hardwood; plywood; polyester webbing. See bom/bom.csv

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand