| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-10-25 | AC |




**TOP VIEW**

Scale 1:10; looking down (along -Z)

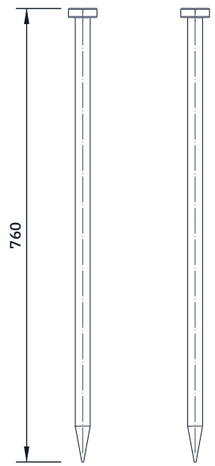


**FRONT VIEW**

Scale 1:10; looking at the front (along +Y)

**RIGHT VIEW**

Scale 1:10; looking at the right side (along -X)

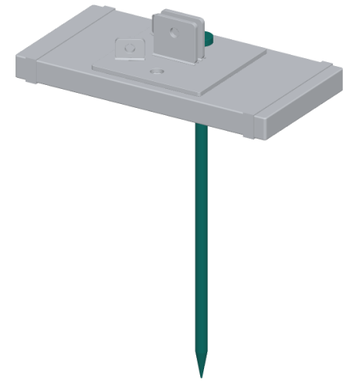

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Make six. Cut 25 mm round bar 760 mm long.
Point one end: a 60 mm long taper, forged or ground.
Head: a 48 mm disc, 15 mm thick, centred on the other end,
welded all round so a sledge cannot knock it off.
Two stakes go through each foot plate and pad and about
630 mm into the ground; the head rests on the foot plate.
Galvanise after welding.
Check: the stake slides through a 28 mm hole without force.

WELLSLING  github.com/BoujeeEnjinia1701/wellsling

# WellSling: ground stake (make 6)

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| WSL-DWG-102 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:10 | mm | | 2026-10-25 | Amish Chadha |

MATERIAL / NOTES
25 mm round bar, S275; 48 mm round, 15 mm thick, for the head

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand