

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC

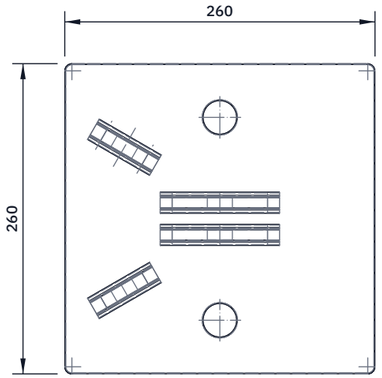


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

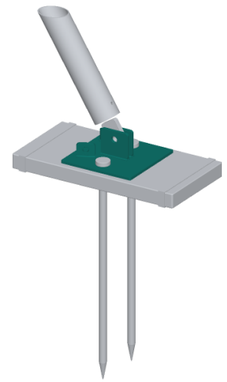

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make three. Base: 260 x 260 x 10 mm plate.
Two 28 mm stake holes on the cross centre line, 85 mm each side of the middle, to match the pad.
Leg lugs: two 100 x 90 x 10 mm plates standing on the base, centred, 17 mm apart (inside faces), running toward the well.
21 mm pin hole through both, 60 mm above the base top.
Drill the two lugs together after welding so the holes line up.
Chain eye fins: two 60 x 45 x 12 mm plates on the well side, centres 50 mm in from the edge and 60 mm either side, each turned to point along its spread chain; 20 mm hole 25 mm up.
Fillet weld 6 mm all round; galvanise after welding.
Check: the leg tongue (16 mm) slides between the lugs and a 20 mm pin goes through all three holes by hand.

WELLSLING github.com/BoujeeEnjinia1701/wellsling

WellSling: foot plate (make 3)

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-103	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES
10 mm and 12 mm S275 plate, hot-dip galvanised

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand