REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC




TOP VIEW

Scale 1:20; looking down (along -Z)




FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

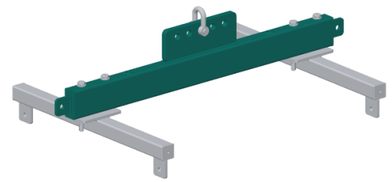

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. RHS 100 x 50 x 4 mm, 1,100 mm long, 100 mm side upright.
Sleeves: six 26.9 x 3.2 mm tubes, 100 mm long, through 27 mm
holes in the top and bottom walls, 300, 400 and 500 mm each
side of the middle; welded flush top and bottom.
Lift lug: 300 x 110 x 20 mm plate standing on top, centred,
along the beam. Five 22 mm holes 50 mm apart, 30 mm below
its top edge, so the hook point can move to balance the animal.
End caps 6 mm. Guide line eyes: 60 x 60 x 10 mm plates on
each end cap, pointing along the beam, 18 mm hole.
Full-penetration weld on the lug; 6 mm fillets elsewhere.
Check: an M16 bolt passes each sleeve; lug square to the beam.

WELLSLING github.com/BoujeeEnjinia1701/wellsling

WellSling: spreader main beam (make 1)

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

RHS 100 x 50 x 4 mm S355; tube 26.9 x 3.2 mm; 20, 10 and 6 mm plate

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand