
CONCEPT, NOT FOR FABRICATION


WellSling · github.com/BoujeeEnjinia1701/wellsling

REV	DESCRIPTION	DATE	BY
P2	Concept sheet from the D3 model	2026-10-25	AC

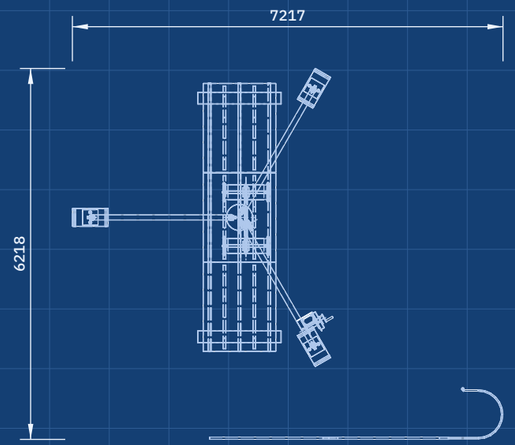


TOP VIEW

Scale 1:100; looking down (along -Z)

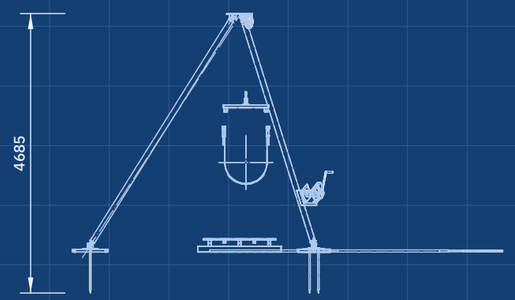


FRONT VIEW

Scale 1:100; looking at the front (along +Y)

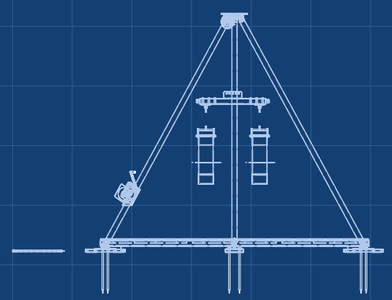

RIGHT VIEW

Scale 1:100; looking at the right side (along -X)

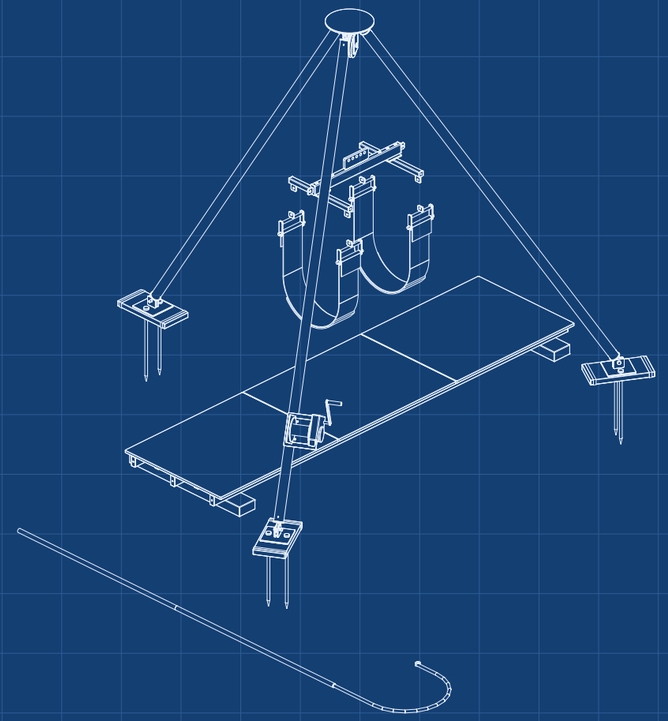

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Tripod: three 88.9 x 3.2 mm legs, 4.5 m pin to pin, feet on a 5 m circle
Head 4.00 m up; spans wells up to 3 m across, pads 0.7 m back from the rim
Safe working load 661 kg at the hook (600 kg animal); rope factor 6.0
Hand winch 1,000 kg, automatic load brake; crank 200 N at most
Two plain webbing bands, 240 mm wide, on band end yokes and an H-frame spreader
Landing bridge: 3 runners, 3 deck panels; never swung over the rim
Kit about 555 kg; heaviest piece 32 kg; about USD 3,093 (estimate)

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

Rim-worked animal lifting kit for open wells

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-010	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:100	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

Concept model; chains, rope, shackles, fasteners and welds not drawn

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand