



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

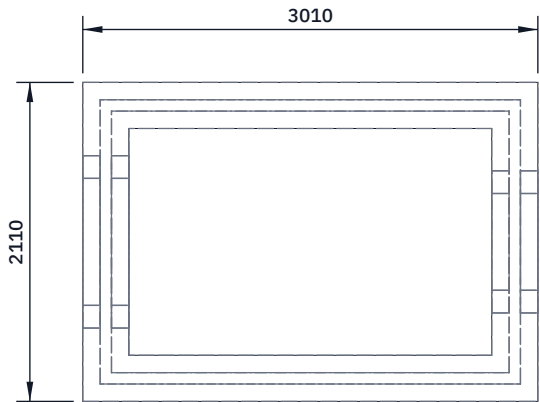


TOP VIEW

Scale 1:50; looking down (along -Z)

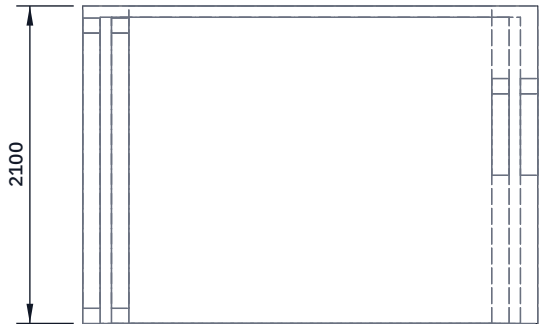


FRONT VIEW

Scale 1:50; looking at the front (along +Y)



RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

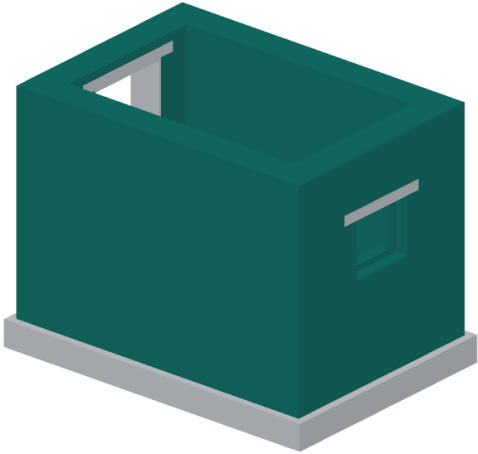

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two 115 mm leaves with a 75 mm cavity: 305 mm wall. Outside 3,010 x 2,110 mm; inside 2,400 x 1,500 mm. 2,100 mm high.

Lay both leaves on the damp-proof strip together, a few courses at a time. Wall ties across the cavity every 900 mm along and every 450 mm up, staggered; keep the cavity clear of mortar.

Door opening (door end, centred): 840 wide, from 100 to 1,920 mm above ground. Bricks under it (to 100 mm) are the door sill.

Pad opening (pad end, centred): 640 wide x 540 high, from 980 to 1,520 mm above ground.

Lintels at 1,920 mm (door) and 1,520 mm (pad): see ZBX-DWG-104.

Fill the cavity as the walls rise (ZBX-BLD-001 step 3).

Capping course: the top 75 mm (2,025 to 2,100) bridges both leaves and the cavity in one course, in mortar, closing the fill in.

Check: plumb, level top within 10 mm, openings square.

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox double brick walls: making sketch

DRAWING NO. ZBX-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Fired brick, cement-sand mortar 1:5, galvanized wall ties					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	