




$$V = L \frac{di}{dt} \quad V_1 = L_1 \frac{di}{dt} \quad V_2 = L_2 \frac{di}{dt}$$

$$V = V_1 + V_2 = (L_1 + L_2) \frac{di}{dt} \quad L = L_1 + L_2$$

$$V_1 = \frac{L_1}{L} V \quad V_2 = \frac{L_2}{L} V$$

$$i = \frac{1}{L} \int_{-\infty}^t V(\delta) d\delta \quad i_1 = \frac{1}{L_1} \int_{-\infty}^t V(\delta) d\delta$$

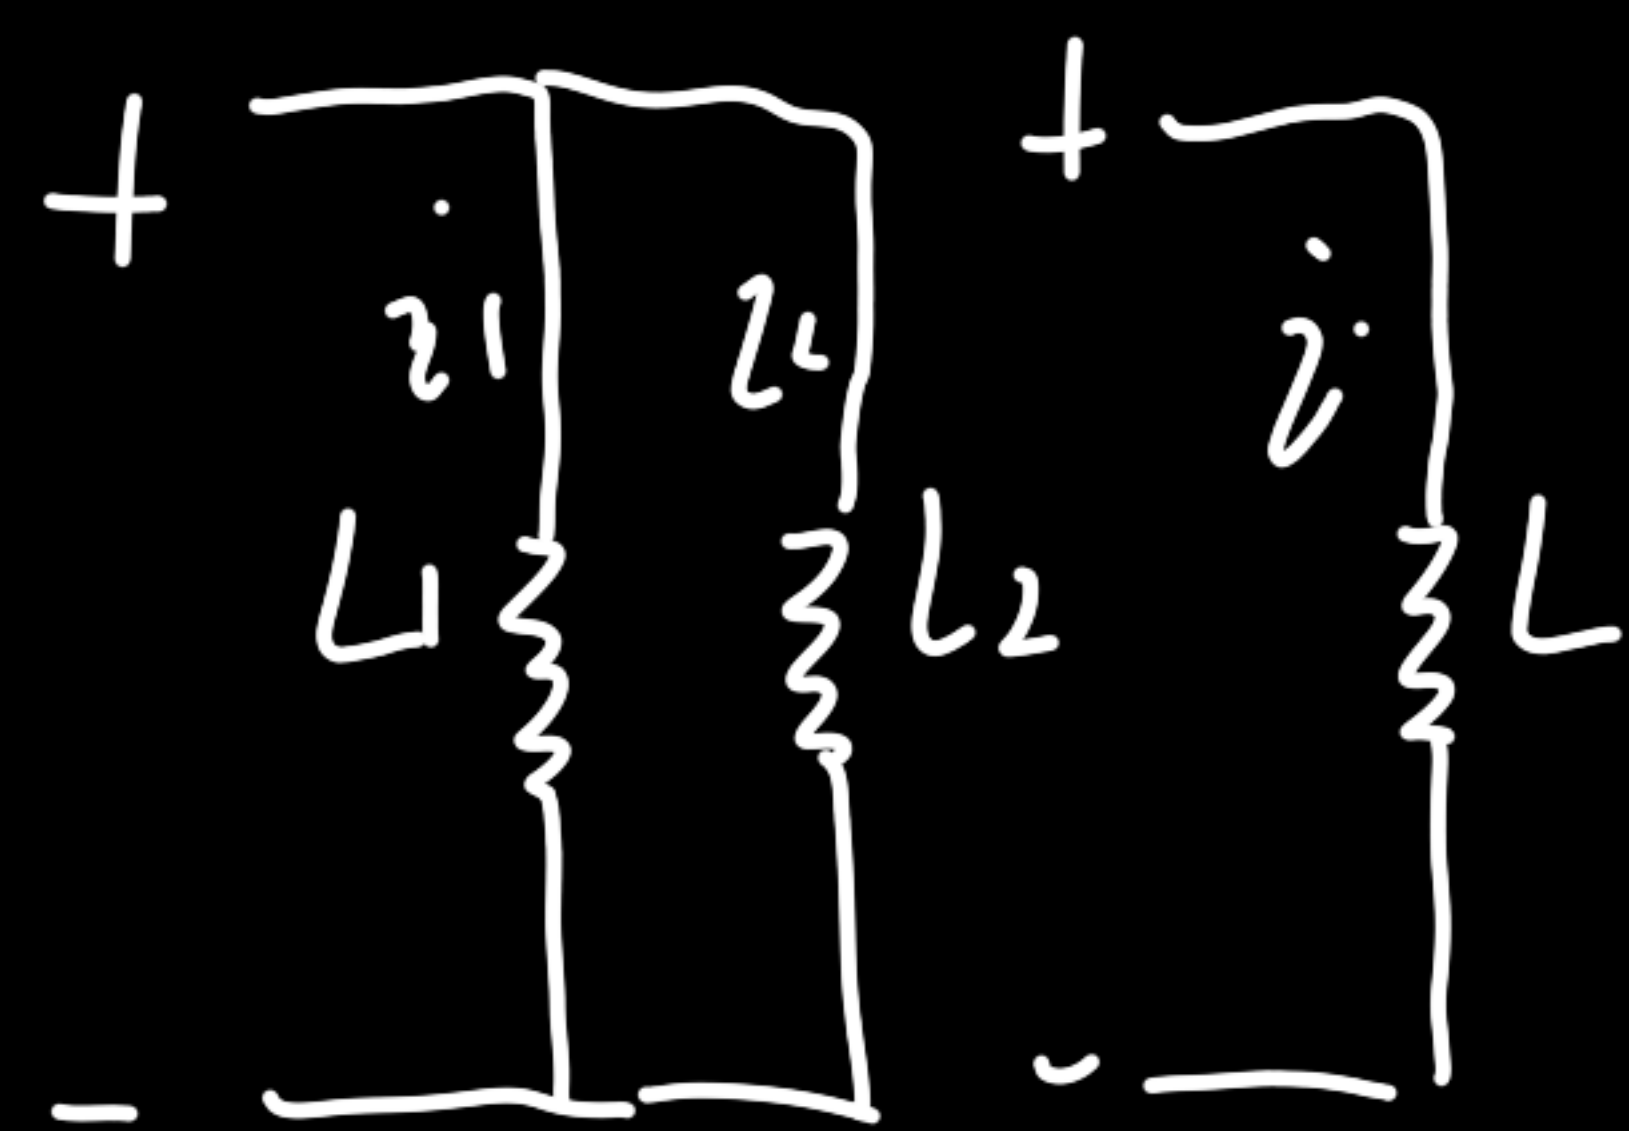

$$i_2 = \frac{1}{L_2} \int_{-\infty}^t V(\delta) d\delta \quad i = i_1 + i_2 = \left(\frac{1}{L_1} + \frac{1}{L_2} \right) \int_{-\infty}^t V(\delta) d\delta$$

$$\frac{1}{L} = \frac{1}{L_1} + \frac{1}{L_2} \quad \frac{i}{i_1} = \frac{L_1}{L} \quad i_1 = \frac{L}{L_1} i = \frac{1}{L_1} \cdot \frac{L_1 L_2}{L_1 + L_2} i$$

$$V_2 = \frac{L_1}{L_1 + L_2} i$$

感

$$L = L_1 + L_2$$

$$\frac{1}{L} = \frac{1}{L_1} + \frac{1}{L_2}$$

阻

$$R = R_1 + R_2$$

$$\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2}$$

串

并