


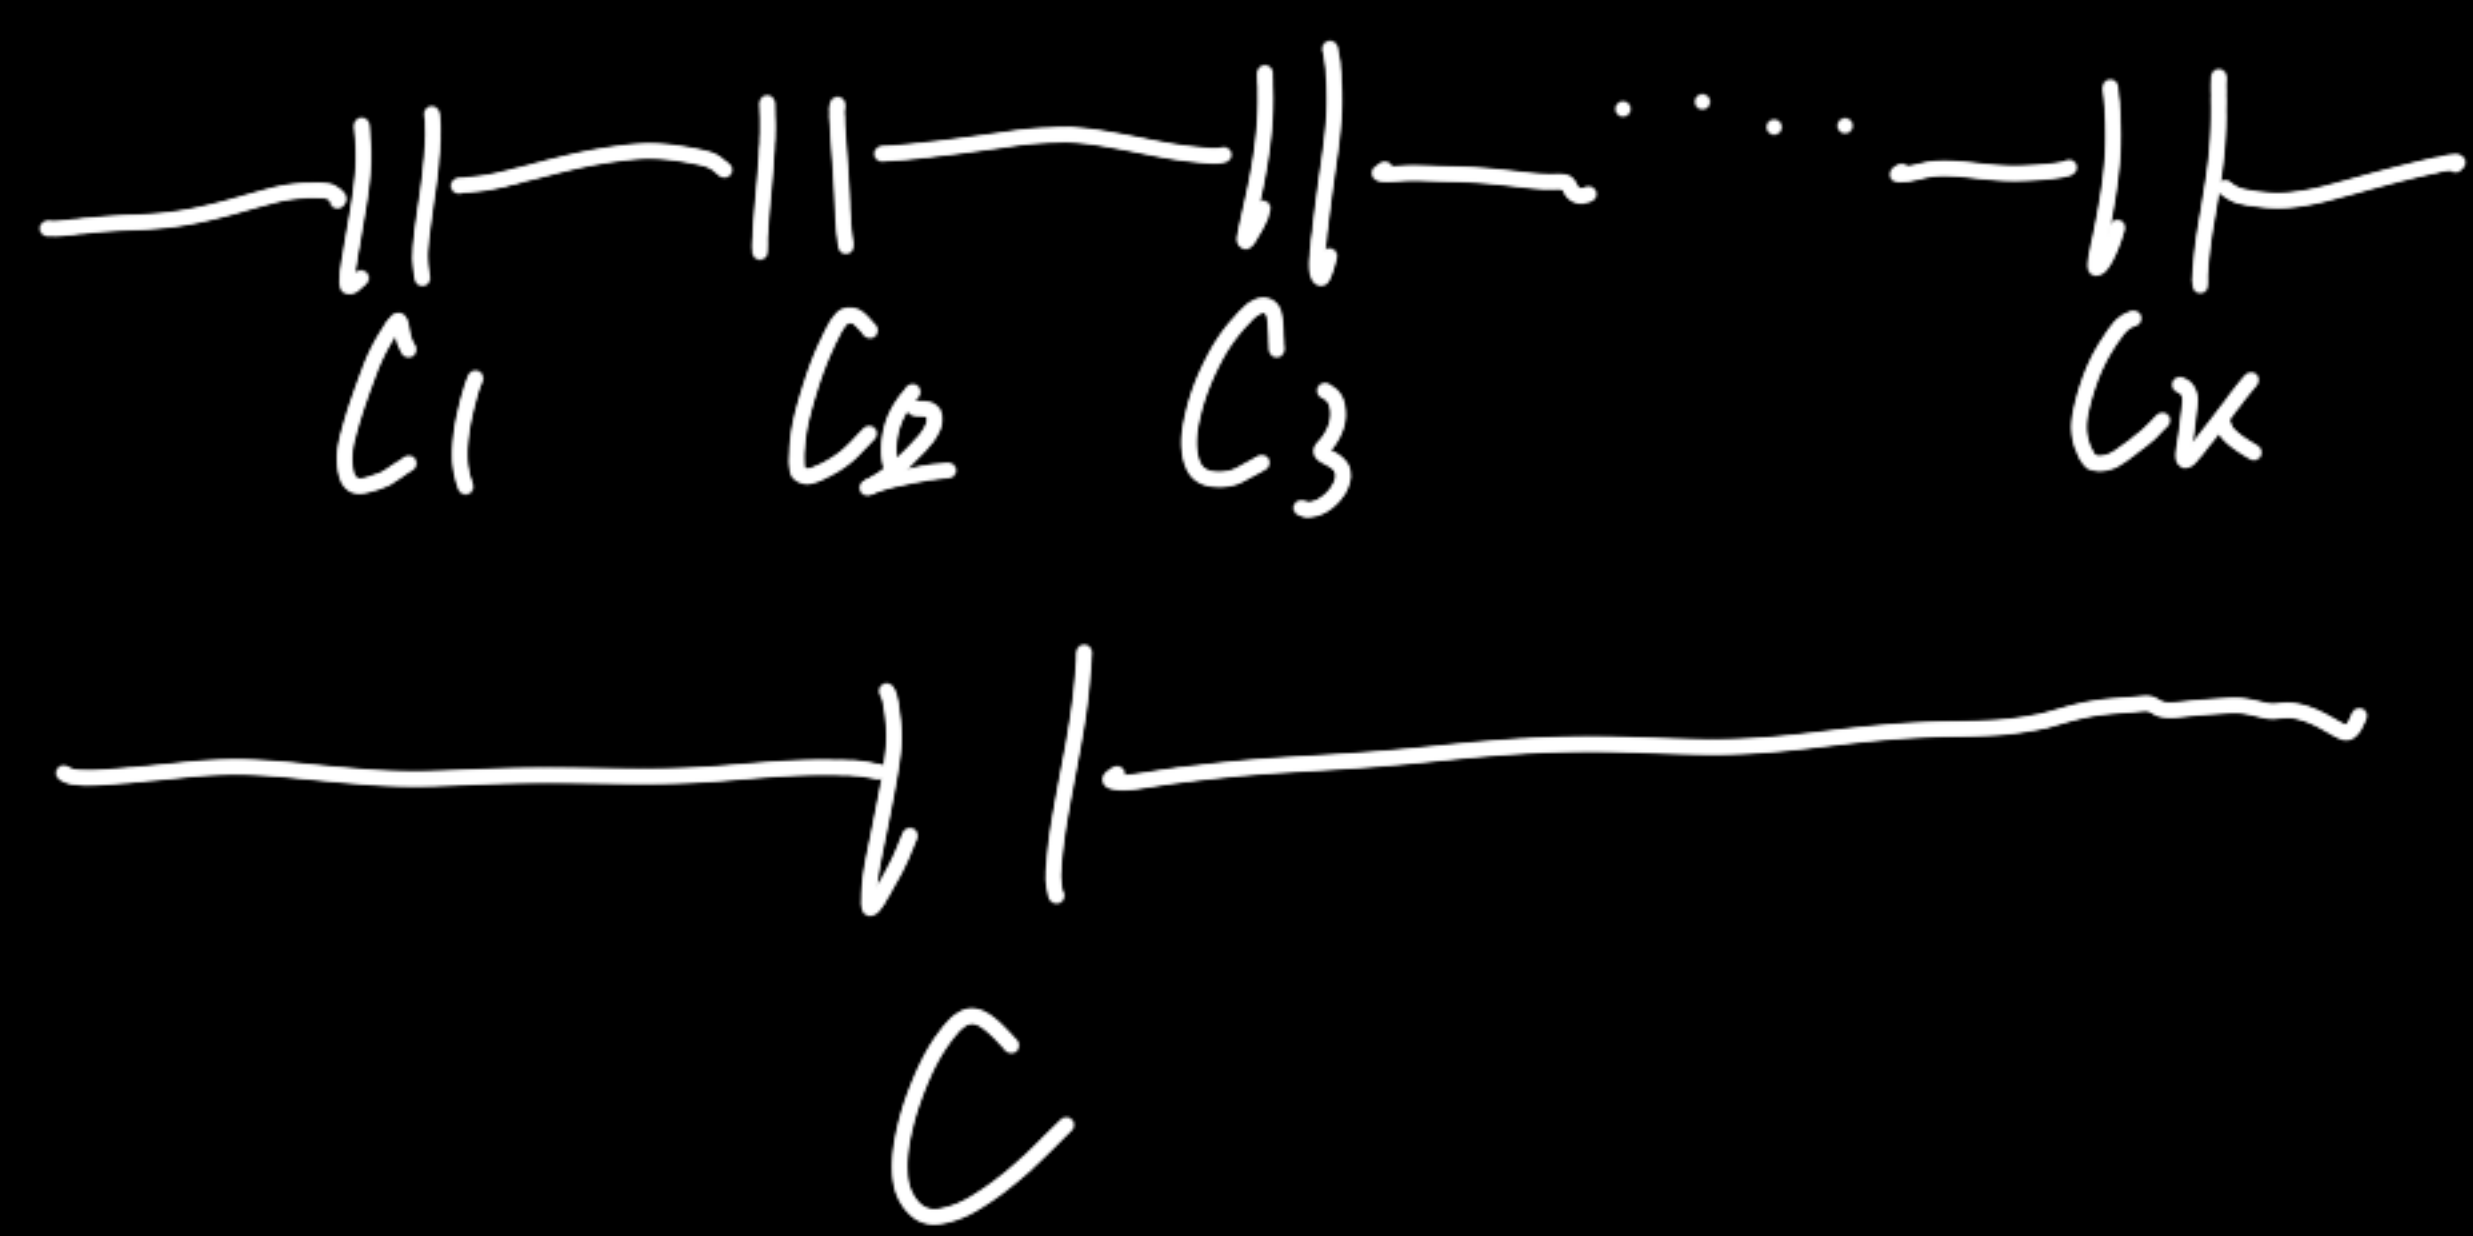

$$V_1 = \frac{1}{C_1} \int_{-\infty}^t i(\delta) d\delta + V_1(t_0)$$

$$V = V_1 + V_2 + \dots + V_n = \left(\frac{1}{C_1} + \frac{1}{C_2} + \dots + \frac{1}{C_n} \right) \left(\int_{-\infty}^t i(\delta) d\delta + V(t_0) \right)$$

$$= \frac{1}{C} \int_{-\infty}^t i(\delta) d\delta \quad V_1 C_1 = V C \quad V_1 = \frac{C}{C_1} V$$


$$V_n = \frac{\frac{1}{C_n}}{\frac{1}{C}} \cdot V$$

$$i = C \frac{dV}{dt}$$

$$i = i_1 + i_2 + \dots + i_n$$

$$= C_1 \frac{dV}{dt} + C_2 \frac{dV}{dt} + \dots + C_n \frac{dV}{dt}$$

$$C = C_1 + C_2 + \dots + C_n \quad i_n = \frac{C_n}{C} i$$

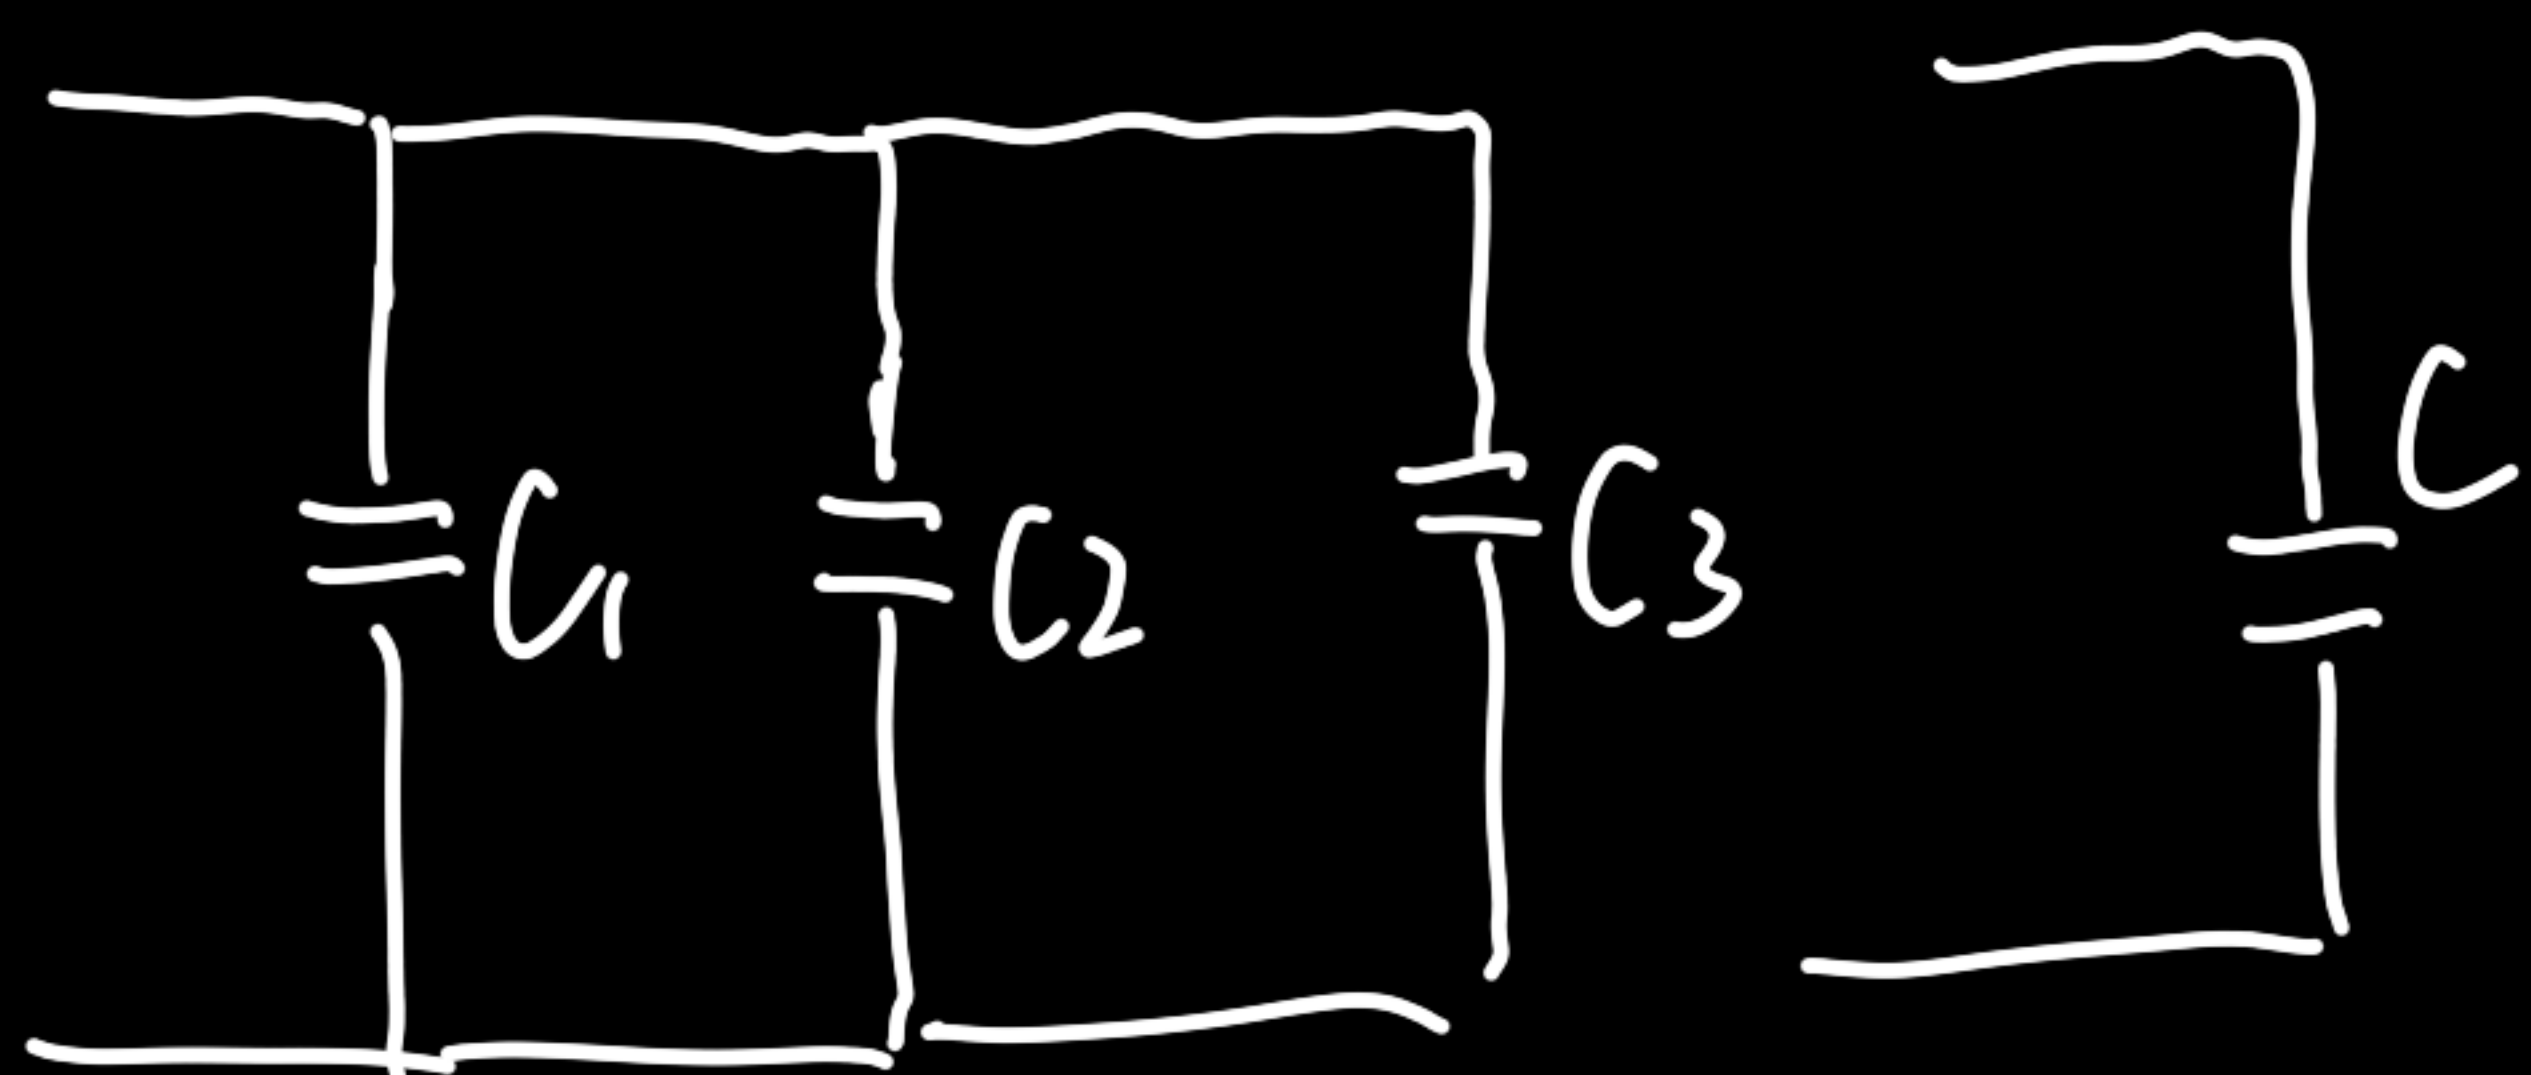

$$V_1 = L_1 \frac{di}{dt}$$

$$V_2 = L_2 \frac{di}{dt}$$

$$V = V_1 + V_2 + \dots + V_n$$

$$= L_1 \frac{di}{dt} + L_2 \frac{di}{dt} + \dots + L_n \frac{di}{dt}$$

$$= (L_1 + L_2 + \dots + L_n) \frac{di}{dt}$$

$$L = L_1 + L_2 + \dots + L_n$$

$$V_n = \frac{L_n}{L} \frac{di}{dt}$$

$$v = V(t_0) + \frac{1}{L} \int_{t_0}^t V(\delta) d\delta$$

$$i = i_1 + i_2 + \dots + i_n = v_1(t_0) + v_2(t_0) + \dots + v_n(t_0)$$

$$+ \frac{1}{L_1} \int_{t_0}^t V(\delta) d\delta + \frac{1}{L_2} \int_{t_0}^t V(\delta) d\delta + \dots + \frac{1}{L_n} \int_{t_0}^t V(\delta) d\delta$$

$$\frac{1}{L} = \frac{1}{L_1} + \frac{1}{L_2} + \dots + \frac{1}{L_n}$$

$$i_n = \frac{\frac{1}{L_n}}{\frac{1}{L}} i$$

