
Drawing

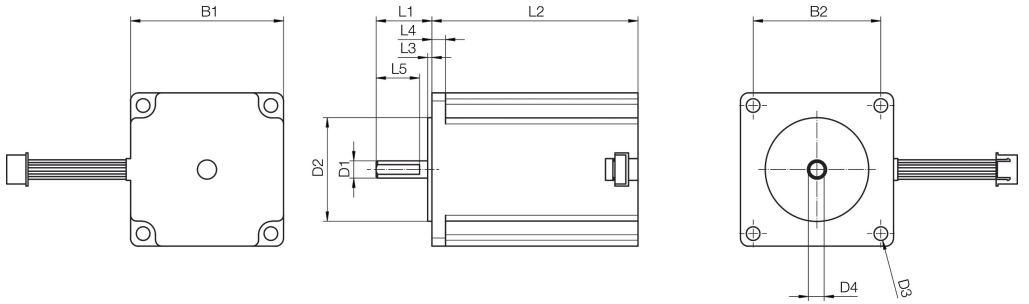


B1	42 mm ±1
B2	31 mm ±1

L1	24 mm ±1
L2	49 mm ±1
L3	2 mm
L5	19 mm ±1

Ø D1	5 mm -0.0150
Ø D2	22 mm ±0.05
Ø D3	M3-4.5
D4	4.5 mm ±0.15

Curves

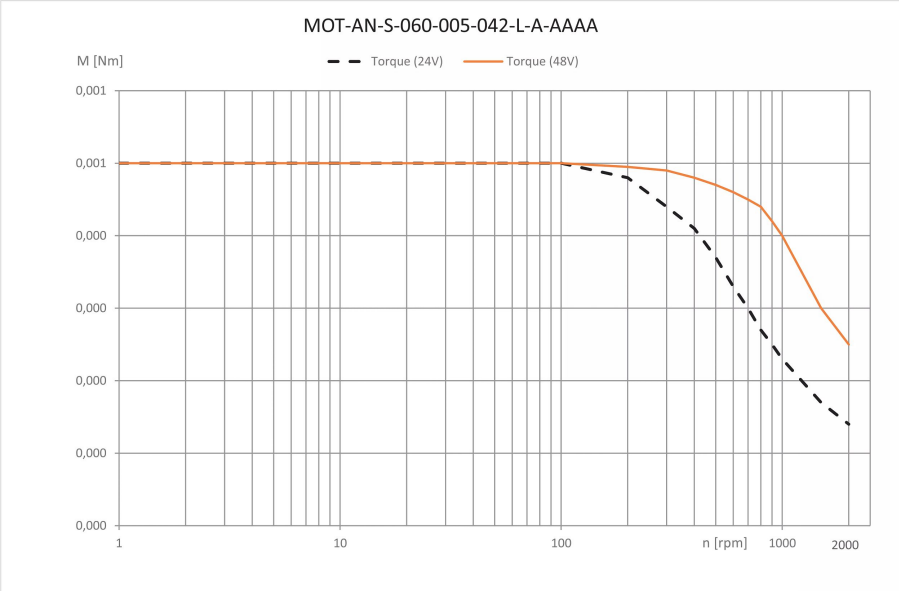

Motor

Max. voltage [VDC]	60
Nominal voltage [VDC]	24 - 48
Nominal current [A]	1.8
Continuous operation [A]	1.1
Holding torque [Nm]	0.5
Ratchet torque [Nm]	0.004
Resistance/phase [Ω]	1.75 ±10%
Inductivity/phase [mH]	3.30 ±20%
Moment of inertia [kgcm²]	0.082
Shaft load, axial [N]	7
Shaft load, radial [N]	20


General

Step angle [°]	1.8±5%
Weight [kg]	0.38
Ambient temperature [°C]	-10 - +50°C
Dielectric strength [VAC]	500
Max. temperature rise permissible [°C]	80
Insulation class	B 130
Air humidity non condensing [%]	85
IP rating	IP40 (shaft seal IP52)
CE	EMV guideline

igus® motion plastics®


Motor

Bipolar motor		
JST XHP-4		
PIN	Colour	Signal
1	white	A
2	brown	A/
3	blue	B
4	black	B/



General

Wiring diagram



Control coil

STEP	A	B	A\	B\		
1	+	+	-	-		CCW
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+	CW	

igus® motion plastics®