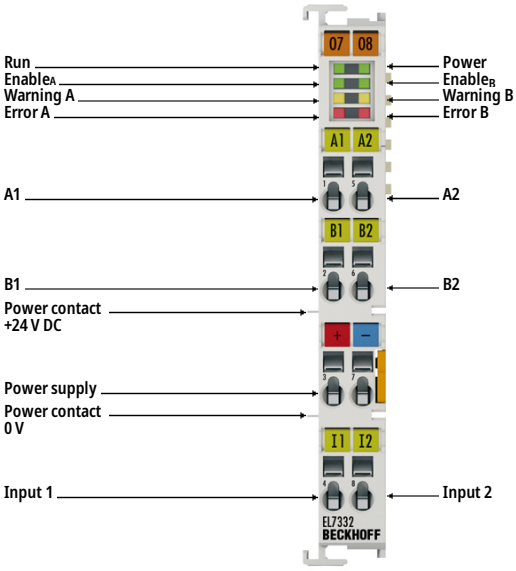
EL7332 | EtherCAT Terminal, 2-channel motion interface, DC motor, 24 V DC, 1 A



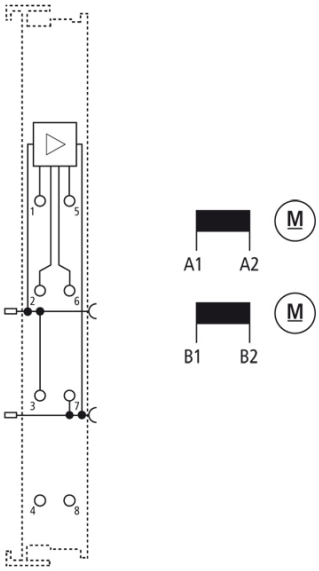


Image similar, may contain optional accessories

Product status: regular delivery

The EL7332 EtherCAT Terminal enables direct operation of two DC motors. It is galvanically isolated from the E-bus. The speed is preset by a 16 bit value from the automation unit. The output stage is protected against overload and short-circuit, the common thermal overload warning applies to both output stages together. The EtherCAT Terminal has two channels that indicate their signal state via light emitting diodes. The LEDs enable quick local diagnosis.

Product information

Technical data

Technical data	EL7332
Technology	compact drive technology
Connection technology	direct motor connection
Number of inputs	1 x end position per channel
Load type	DC brush motor, inductive
Number of channels	2
Number of outputs	1 x DC motor per channel
Supply voltage electronics	24 V DC (via power contacts)
Supply voltage power	24 V DC (internally via power contacts)

Output current	max. 1 A per channel
Performance increase	yes, through ZB8610 fan cartridge
Output current with ZB8610	max. 3.0 A per channel
PWM clock frequency	32 kHz with 180° phase shift each
Duty factor	0...100% (voltage-controlled)
Resolution	max. 10 bit current, 16 bit speed
Current consumption power contacts	typ. 40 mA + motor current
Current consumption E-bus	typ. 140 mA
Distributed clocks	yes
Special features	travel distance control
Electrical isolation	500 V (E-bus/field potential)
Weight	approx. 50 g
Operating temperature	0...55°C
Storage temperature	-25...+85°C
Relative humidity	95%, no condensation
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
Protect. rating/installation pos.	IP20/see documentation
Pluggable wiring level	for all ESxxxx terminals
Approvals/markings	CE, UL

Housing data	**EL-12-8pin**	**ES-12-8pin**
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxxx series	
Wiring	solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm², st*: 0.08...2.5 mm², f*: 0.14...1.5 mm²	s*: 0.08...1.5 mm², st*: 0.08...1.5 mm², f*: 0.14...1.5 mm²
Connection cross-section AWG	s*: AWG28...14, st*: AWG28...14, f*: AWG26...16	s*: AWG28...16, st*: AWG28...16, f*: AWG26...16
Stripping length	8...9 mm	9...10 mm

Current load power contacts	I_{max}: 10 A
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm

*s: solid wire; st: stranded wire; f: with ferrule

Ordering information

Ordering information	
EL7332	EtherCAT Terminal, 2-channel motion interface, DC motor, 24 V DC, 1 A
ES7332	EtherCAT Terminal, 2-channel motion interface, DC motor, 24 V DC, 1 A, pluggable wiring level