


GENERAL DESCRIPTION

karaloop P1.0

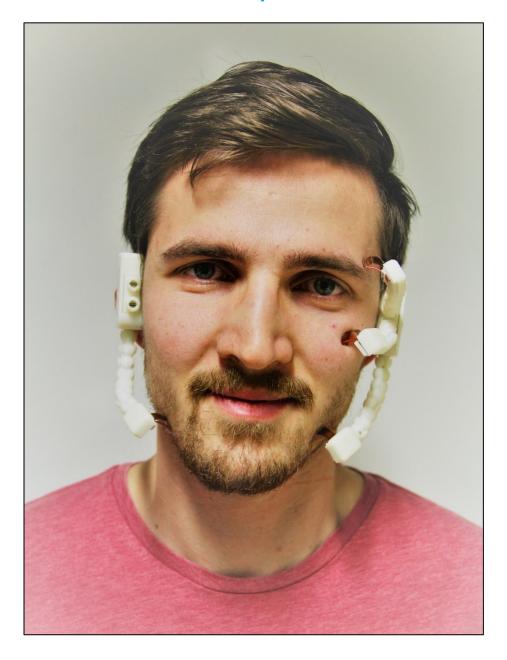


karaloop - Prototype 1.0 (P1.0)

P1.0 measures voluntary movements of the face and translates them into mouse or keyboard commands sent via Bluetooth Low Energy (BLE) to wirelessly communicate with any PC, iOS or Android device.

P1.0 consists of a light headset which incorporates up-to six articulated legs (three legs per side) that can conform the contour of any face and capture voluntary movements from any muscle, and a control box housing an open-source Arduino-compatible Bluefruit nRF52 Feather board that is automatically recognized as a human-interface device (HID). P1.0 transmits wirelessly preprogramed keyboard or mouse HID commands to any PC, iOS or Android device via BLE. The headset and the control box are connected via two cables relaying sensor signals from both sides of the face to the Bluefruit nR52 board.


The articulated headset legs are made of 3D printed modular Lego-like pieces with ball joints allowing the required adjustments of length and direction to fit any face contour. The modular design further facilitates replacements if needed. At the end of each leg, a probe incorporates a flexible sensor that, when in contact with the face, captures voluntary movements. The signals from the probes are relayed to an electronic hub (one per side) which amplifies and conditions the signals before sending them to the controller box.

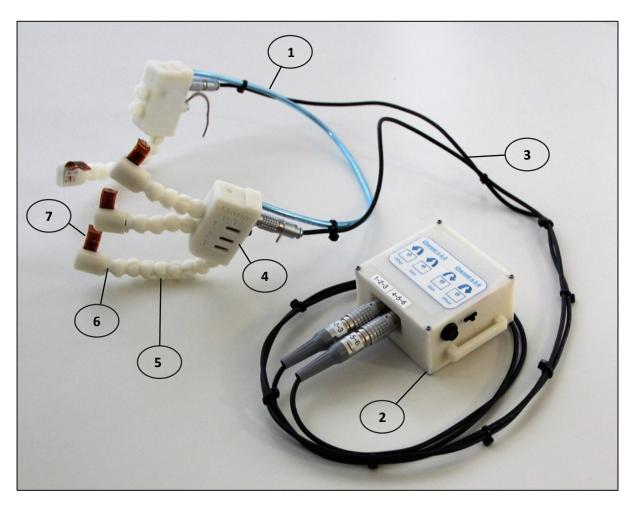

P1.0 components. (1) Headset; (2) Control box; (3) Cables connecting headset and control box (two, left and right); (4) Electronic hubs (two, left - right); (5) Legs (up-to six, three left - three right); (6) Probes (up-to six); (7) Flexible sensors (up-to six).

ASSEMBLY DESCRIPTION


karaloop P1.0

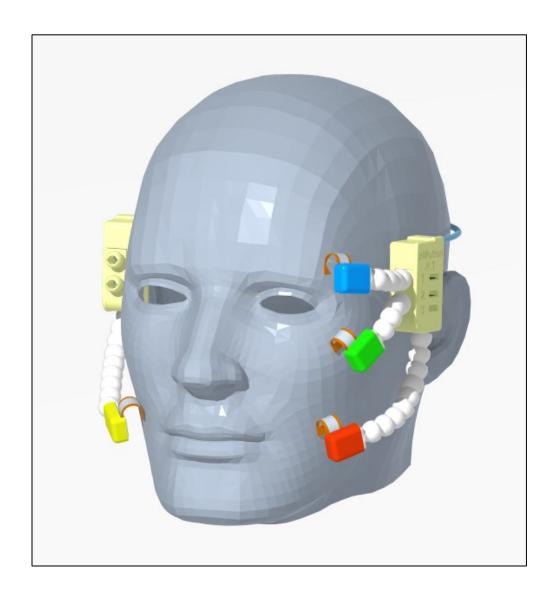

CONTENTS

| kar | aloop P1.0 | 3 |
|------|-----------------------------|----|
| Ger | neral assembly | 5 |
| 1. | Right/left Hub sub-assembly | 6 |
| 2. | Sensor probe sub-assembly | 8 |
| F | abrication process | 9 |
| 3. | Headband sub-assembly | 11 |
| F | abrication process | 11 |
| 4. | Control box sub-assembly | 12 |
| PCE | s Overview | 13 |
| Cor | trol box circuit schematic | 14 |
| Elec | ctronic parts list (EPL) | 15 |
| Me | chanical parts list (MPL) | 16 |
| Prir | ited parts list (PPL) | 17 |

General assembly

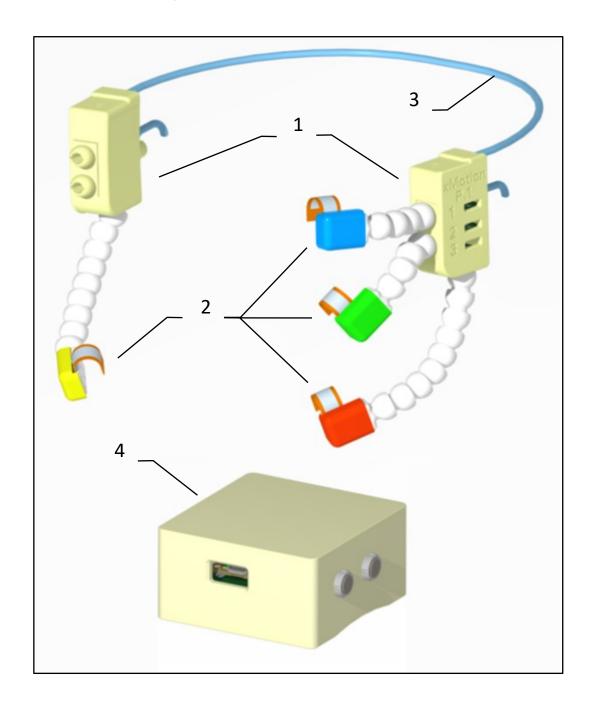


| N° | Part description | Abbreviation | Quantity |
|----|-----------------------------|--------------|----------|
| 1 | Right/left hub sub-assembly | Н | 2 |
| 2 | Sensor probes sub-assembly | SP | 4 |
| 3 | Headset band sub-assembly | НВ | 1 |
| 4 | Control box sub-assembly | СВ | 1 |

1. Right/left hub sub-assembly


The right/left hub receives the signals from each of the sensors, conditions them, and transmits them to the control box.



| N | l° | Part description |
|----|----|---|
| 1 | | Left hub box |
| 2 | | Left hub support cover |
| 3 | | Left hub box cover |
| 4 | | Connector 5 pos. + nut and washer |
| 5 | | Ear support |
| 6 | | Allen screw M2.5x6 (1x) |
| 7 | | Ball joint connector (male): channels 1 and 2 |
| 8 | | Ball joint connector (male): channel 3 |
| 9 | | Flat wire 4 contacts (3x) |
| 10 | 0 | Backlock connector (3x) |
| 1: | 1 | PCB channel 1, PCB channel 2, PCB channel 3 |
| 1 | 2 | Perpendicular PCB |

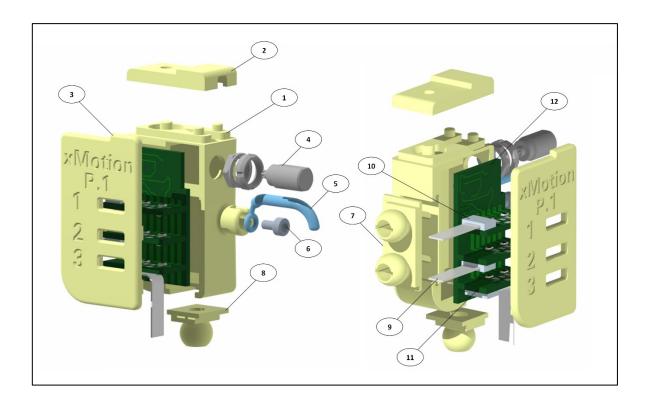


N° 11: PCB channels 1 – 3



| N° | Part description |
|----|-----------------------|
| 1 | 10kΩ resistors (2x) |
| 2 | Operational amplifier |
| 3 | Welding tracks |
| 4 | 120Ω resistors (2x) |
| 5 | Trimmer 100 kΩ 250 mW |
| 6 | Trimmer 2 kΩ 250 mW |
| 7 | Backlock connector |


N° 12: Perpendicular PCB




| N° | Part description |
|----|--|
| 1 | 4.7μF capacitor |
| 2 | 0.15μF capacitor |
| 3 | 10nF capacitor |
| 4 | 0.15μF Capacitor |
| 5 | 100kΩ resistor |
| 6 | 1kΩ resistor |
| 7 | Headers 1.27x1.27mm |
| 8 | Linear voltage regulator 1-5.5 V SOIC-8 |
| 9 | Welding tracks |

2. Sensor probes sub-assembly


When in contact with the user's face, the sensor is designed to be sufficiently flexible to detect voluntary facial movements. The sensitive element is a flexible piece that bends during the voluntary contraction of one or more muscles of the face. Two strain gauges fixed onto a flexible substrate translate its mechanical deformations into electrical signals.



| N° | Part description |
|----|--|
| 1 | Probe protective cover left |
| 2 | Fillister screw M1.6x6 (4x) |
| 3 | PCB probe connection |
| 4 | Backlock connector |
| 5 | Flat wire 4 contacts |
| 6 | Ball joints left (female) |
| 7 | Sensor (flexible substrate + 2 strains gauges) |

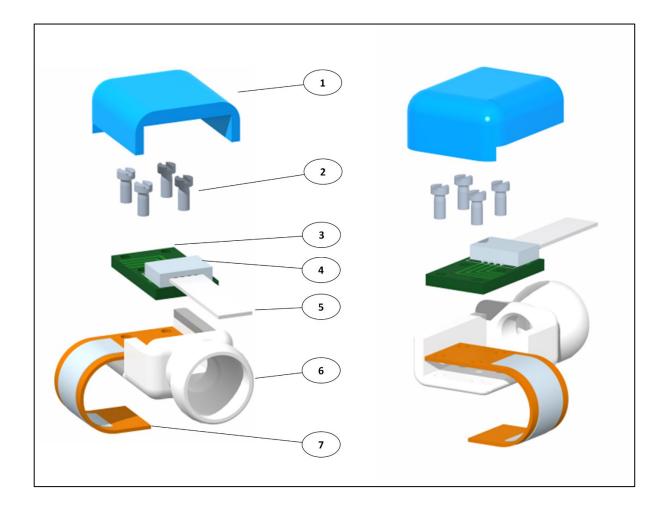


N° 3: Probe connection



| N° | Part description | | |
|----|-----------------------------|--|--|
| 1 | Backlock connector | | |
| 2 | Fillister screw M1.6x6 (4x) | | |


FABRICATION PROCESS

MATERIALS NEEDED can be found in Mechanical Part List (MPL, page 15), Printed Parts List (PPL, page 17) and Electronical part list (EPL, page 16)

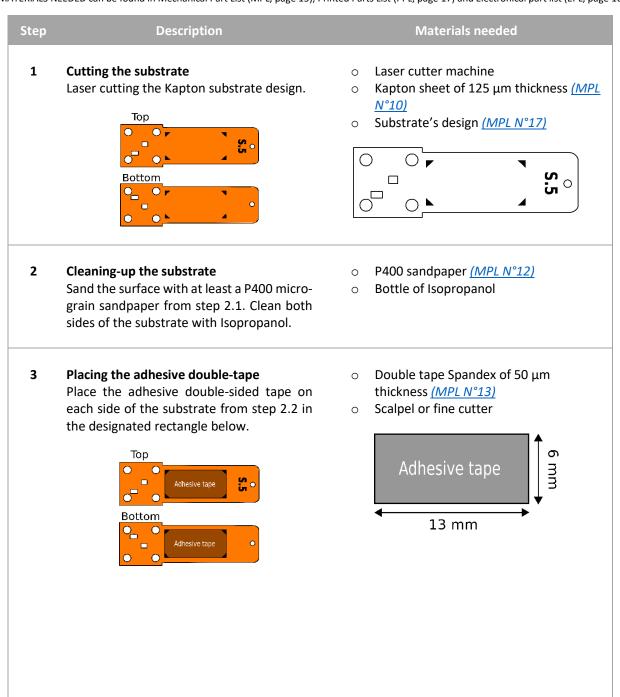

4 Bonding of gauges


Attach the strain gauges on top of the two adhesive tapes from step 2.3 and put a weight on it, for at least 1 hour, until the adhesive has bonded well.



- \circ 2 Strain gauges HBM of 120 Ω (EPL N°16)
- A tweezer to manipulate the strain gauges
- Weight of ≥ 5 Kg

5 Electrical and mechanical protection


Recover each side of the substrate and strain gauges from step 2.4 with Kapton tape as shown below:




- Kapton tape of 25 μm thickness (MPL N°11)
- Scalpel or fine cutter

6 Electrical wiring

Place the substrate from step 2.5 on the bottom of the PCB probe connection. Route the strain gauges contacts through the substrate two little rectangular openings, which are highlighted in red in step 2.5. Then, solder the contacts as illustrated below:






- PCB probe connection with the zeroforce connector mounted (Part N°2.3)
- Soldering station with tin wire
- A tweezer to manipulate the strain gauges

3. Headband sub-assembly

The headband is made of steel wire of 2 mm diameter. The steel wire is shaped using pliers to adapt to the head contour. Then, the steel wire is inserted into a flexible silicone-based tubing to improve the comfort of the wearable headset.




FABRICATION PROCESS

MATERIALS NEEDED can be found in Mechanical Part List (MPL, page 15), Printed Parts List (PPL, page 17) and Electronical part list (EPL, page 16)


| Step | Description | | Materials needed |
|------|--|---|---|
| 1 | Curve the wire Curve the 30 cm long wire so that it follows the contour of the head. | 0 | Wires of Ø1.6 mm (MPL N°14) |
| 2 | Assembly with the silicone tube Slide the curved wire from step 3.1 into the silicone tube. | 0 | Silicone tube of Ø2 mm (MPL N°15) |
| 3 | Curve both ends of the wire and assembly with right/left hub (Part N°1) Curve each end of the wire from step 3.2, so that it can be attached to the left/right hubs (Part N°1). | 0 | Right/left hub sub-assembly (<u>Part</u> <u>N°1)</u> |

4. Control box sub-assembly


The control box receives the conditioned signals from the left/right hubs, manages the system and sends data wirelessly via BLE to a connected device.

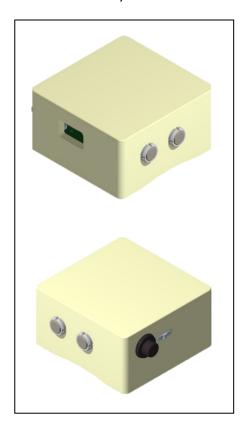

| N° | Part description |
|----|--|
| 1 | Top cover box |
| 2 | Supply switch |
| 3 | Push button |
| 4 | Middle box |
| 5 | Connector 5 pos. + nut and washer (2x) |
| 6 | Bluefruit nRF52 Feather |
| 7 | Headers 16 pos. |
| 8 | Headers 12 pos. |
| 9 | Nuts M2.5 (4x) |
| 10 | Main PCB |
| 11 | Battery LIPO 420mAh 3.7V |
| 12 | Spacer M2.5x10 (4x) |
| 13 | Bottom cover box |
| 14 | Flat screw M2.5x6 (4x) |

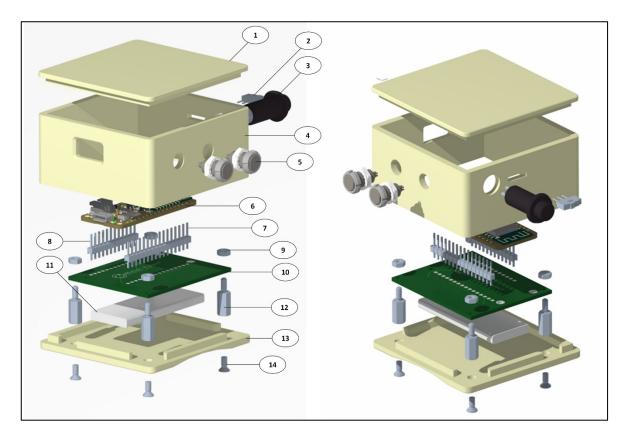


N° 10: Main PCB




| N° | Part description |
|----|--------------------------------|
| 1 | 10kΩ resistor |
| 2 | Connector pins for right side |
| 3 | Connector pins for left side |
| 4 | Connector pins for battery |
| 5 | Connector pins for push button |
| 6 | Bluefruit nRF52 Feather |
| 7 | Battery LIPO 420mAh 3.7V |
| | |

PCBs Overview

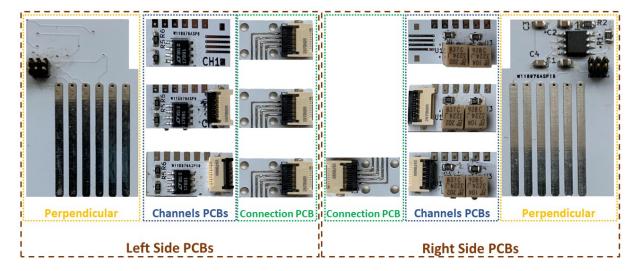

Control box circuit schematic

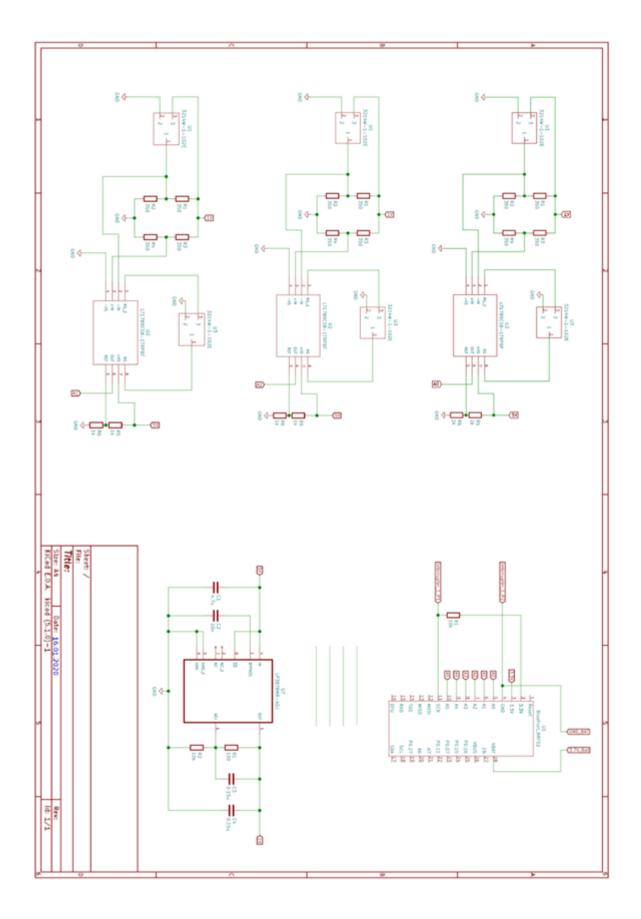

Electronic parts list (EPL)

| N° | Part description | РСВ | Quantity | Link |
|----|--|--|----------|---------------------|
| 1 | Operational amplifier | PCB channel 1,2 and 3 | 3 | <u>LT1789-1</u> |
| 2 | Trimmer 2 kΩ 250 mW | PCB channel 1,2 and 3 | 3 | 3224J-1-202E |
| 3 | Trimmer 100 kΩ 250 mW | PCB channel 1,2 and 3 | 3 | 3224J-1-104E |
| 4 | 10 k Ω resistors | PCB channel 1,2 and 3 | 6 | SMD resistors |
| 5 | 120 Ω resistors | PCB channel 1,2 and 3 | 6 | SMD resistors |
| 6 | Backlock Connector (1.0 pitch, 4 pins, Dual Contact) | PCB channel 1,2 and 3+ PCB probe connection | 12 | XF3M |
| 7 | Linear voltage regulator 1-5.5 V SOIC-8 | Perpendicular PCB | 1 | LP3878MR-ADJ/NOPB |
| 8 | 0.15 μF Capacitors | Perpendicular PCB | 2 | SMD capacitors |
| 9 | 10 nF capacitor | Perpendicular PCB | 1 | SMD capacitor |
| 10 | 4.7 μF capacitor | Perpendicular PCB | 1 | SMD capacitor |
| 11 | 1 kΩ resistor | Perpendicular PCB | 1 | SMD resistors |
| 12 | 100 kΩ resistor | Perpendicular PCB | 1 | SMD resistors |
| 13 | Headers 1.27x1.27mm | Perpendicular PCB | 1 | 20021111-00006T4LF |
| 14 | Wire housings 1.27x1.27mm | Perpendicular PCB | 1 | 20021311-00006T4LF |
| 15 | Bluefruit nRF52 Feather | Main PCB | 1 | <u>nRF52</u> |
| 16 | 10 kΩ resistors | Main PCB | 1 | SMD resistors |
| 17 | Batteries LIPO 420mAh 3.7V | Main PCB | 1 | Rechargable battery |
| 18 | Push button opaque | Main PCB | 1 | Push button |
| 19 | Supply switch | Main PCB | 1 | <u>NK236</u> |

Mechanical parts list (MPL)

| N° | Part description | Assembly | Quantity | Link |
|----|--|----------|----------|--------------------|
| 1 | Fillister screw M1.6x6 | SP | 24 | <u>M1.6x6</u> |
| 2 | Flat wire 4 contacts - 30 mm | SP | 4 | 98267-0701 |
| 3 | Flat wire 4 contacts - 50 mm | SP | 4 | 686704050001 |
| 4 | Flat wire 4 contacts - 76 mm | SP | 2 | 15167-0704 |
| 5 | Allen screw M2.5x6 | Н | 2 | <u>M2.5x6</u> |
| 6 | Connector 5 pos. + nut and washer | H + CB | 4 | EGG.00.305.CLL |
| 7 | Nuts M2.5 | СВ | 4 | <u>Nuts</u> |
| 8 | Spacer M2.5x10 | СВ | 4 | <u>Spacer</u> |
| 9 | Flat screw M2.5x6 | СВ | 4 | <u>M2.5x6</u> |
| 10 | Kapton sheet of 125 μm thickness | SP | 1 | <u>Kapton</u> |
| 11 | Kapton tape of 25 μm thickness | SP | 1 | Kapton tape |
| 12 | P400 sandpaper | SP | 1 | <u>A02010</u> |
| 13 | Double tape Spandex of 50 μm thickness | SP | 1 | <u>Spandex</u> |
| 14 | Steel wire – 2 mm of diameter | НВ | 30 cm | Steel wire |
| 15 | Silicone pipe – 2.5 mm of internal diameter and 4 mm of outside diameter | НВ | 30 cm | Silicone pipe |
| 16 | Strain gauges HBM of 120 Ω | SP | 4 | Strain gauges |
| 17 | Substrate's design | SP | - | Substrate's design |

Printed parts list (PPL)

Each piece has been printed with ABS or tough PLA

| N° | Part description | Assembly | Quantity | Part name |
|----|--|----------|----------|----------------------------------|
| 1 | Ball joints | SP | min. 25 | ball_joints.stl |
| 2 | Protective cover probe left | SP | 4 | protective cover probe left.stl |
| 3 | Protective cover probe right | SP | 4 | protective cover probe right.stl |
| 4 | Ball joints left (female) | SP | 3 | ball joints left.stl |
| 5 | Ball joints right (female) | SP | 3 | ball joints right.stl |
| 6 | Left hub box | Н | 1 | hub box left.stl |
| 7 | Left hub box cover | н | 1 | hub cover box left.stl |
| 8 | Left hub support cover | Н | 1 | hub support cover left.stl |
| 9 | Right hub box | Н | 1 | hub_box_right.stl |
| 10 | Right hub box cover | Н | 1 | hub cover box right.stl |
| 11 | Right hub support cover | Н | 1 | hub_support_cover_right.stl |
| 12 | Ball joint connector (male): channel 1 and 2 | Н | 2 | ball joint connector 12.stl |
| 13 | Ball joint connector (male): channel 3 | н | 2 | ball joint connector 3.stl |
| 14 | Top cover box | СВ | 1 | top cover control box.stl |
| 15 | Middle box | СВ | 1 | middle_control_box.stl |
| 16 | Bottom cover box | СВ | 1 | bottom cover control box.stl |

This work was partially sponsored by Fondation Privée des HUG and Wyss Center through support awarded to Ferran Galán at University of Geneva.

Quentin Praz, Ahmad Jaafar, Spiros Schoinas and Philippe Passeraub from HEPIA, and Ferran Galán from <u>University of Geneva</u> contributed to the conception and development of *karaloop* <u>P1.0</u>, <u>P2.0</u> and <u>P3.0</u>.

karaloop P1.0 is OSHWA-certified open source hardware [CH00014].



This document is licensed under Creative Commons Attribution 4.0 International (CC BY 4.0).



