
# sa400_led_monitor v0.2.3 boards — schematic, as built (r2 BOM)

Bus signals are active-low, open-collector, terminated 150 Ω at the last drive. This board: high-impedance tap, no terminators, never drives the bus. All gate pin numbers are DIP-14 pins.

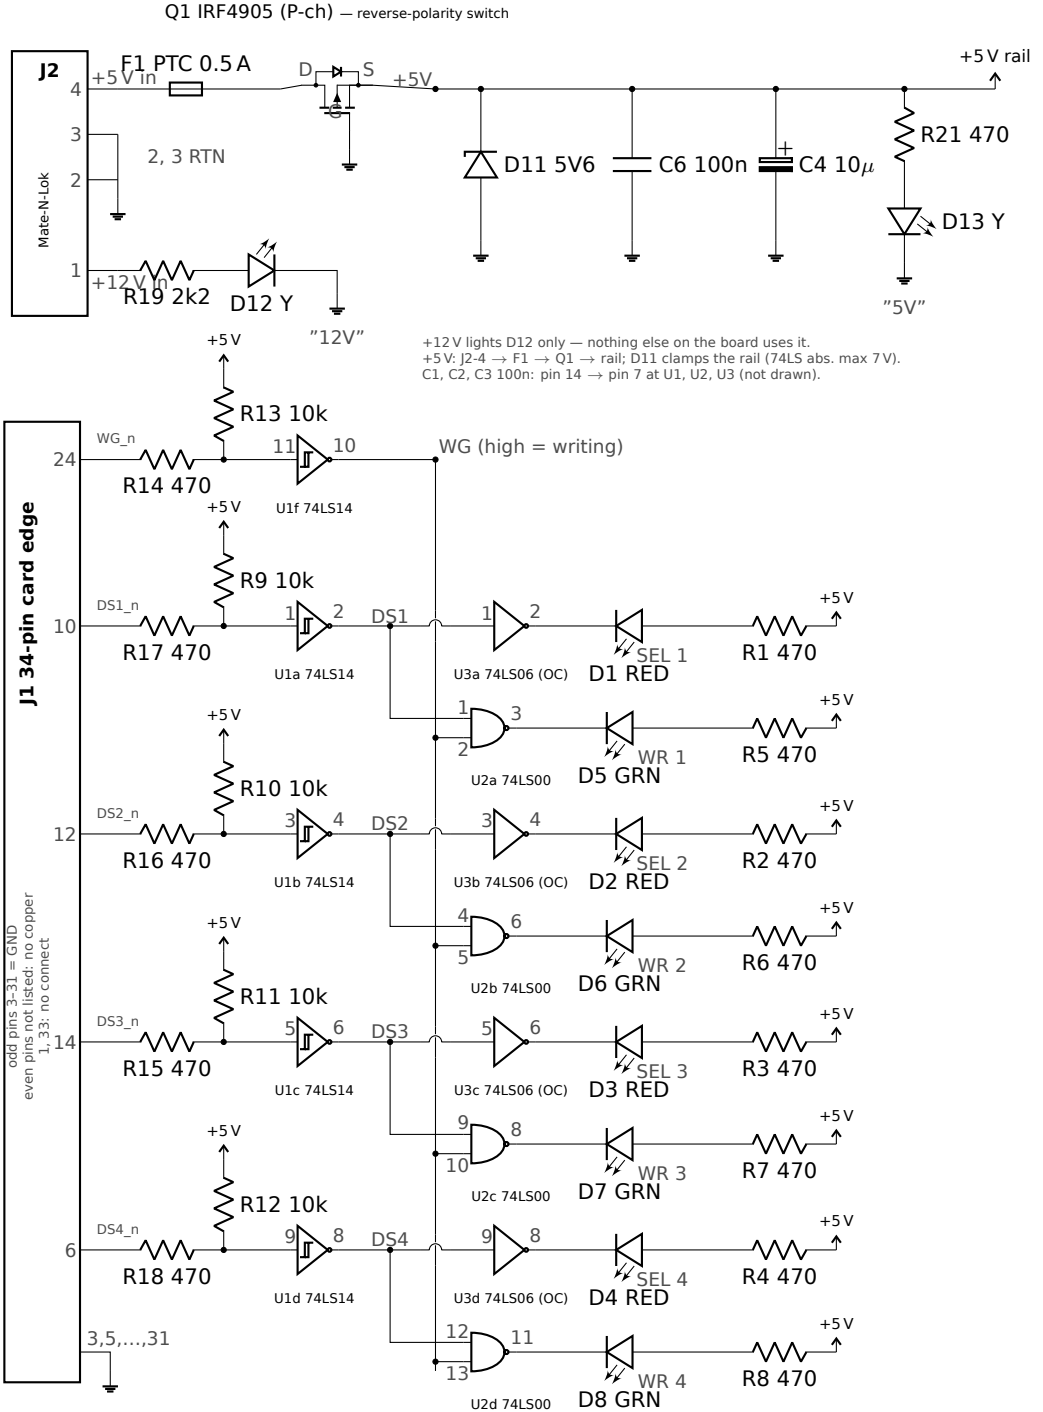


Unused: U1 pin 13 → GND (out 12 open); U3 pins 11, 13 → GND (outs 10, 12 open). Power: pin 14 = +5 V, pin 7 = GND on U1–U3.
Drive $n$ on this board = TRS-80 drive : $n-1$. LED current ≈ $(5 - 0.4 - V_f)/470 \approx 5.5$–$6.5$ mA. Red = DS$n$; green = DS$n$ · WG.