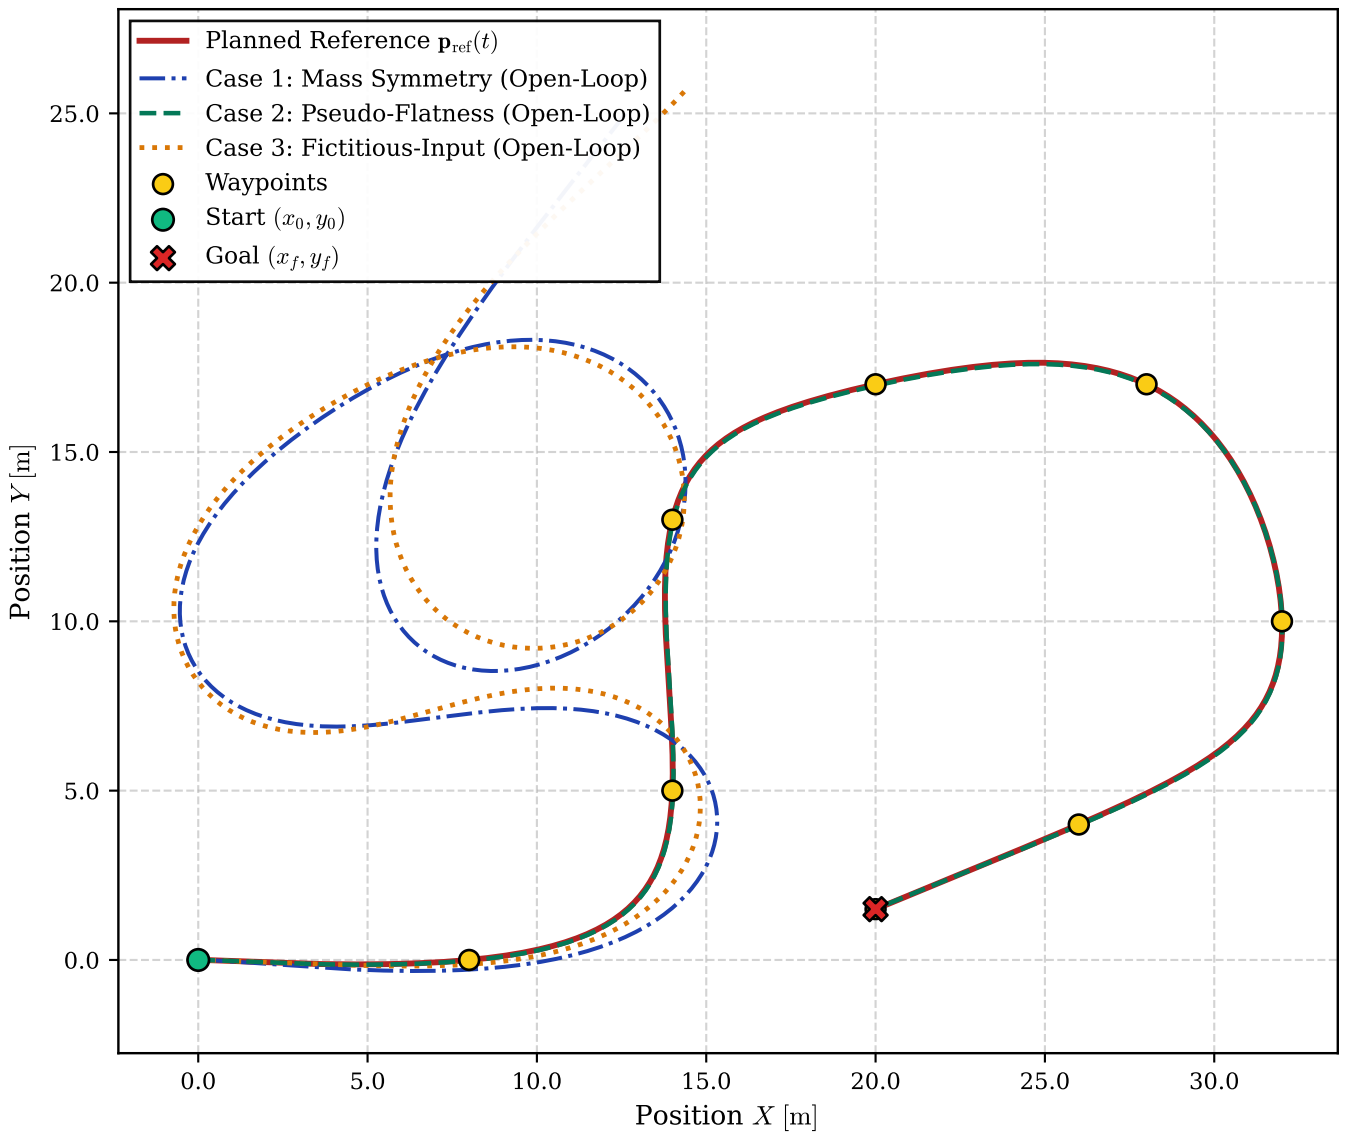
Open-Loop Response vs. Planned Reference Trajectory
Planned Reference $\mathbf{p}_{\text{ref}}(t)$
Case 1: Mass Symmetry (Open-Loop)
Case 2: Pseudo-Flatness (Open-Loop)
Case 3: Fictitious-Input (Open-Loop)
Waypoints
Start (x_0, y_0)
Goal (x_f, y_f)
Position Y [m]
Position X [m]
0.0
5.0
10.0
15.0
20.0
25.0
30.0