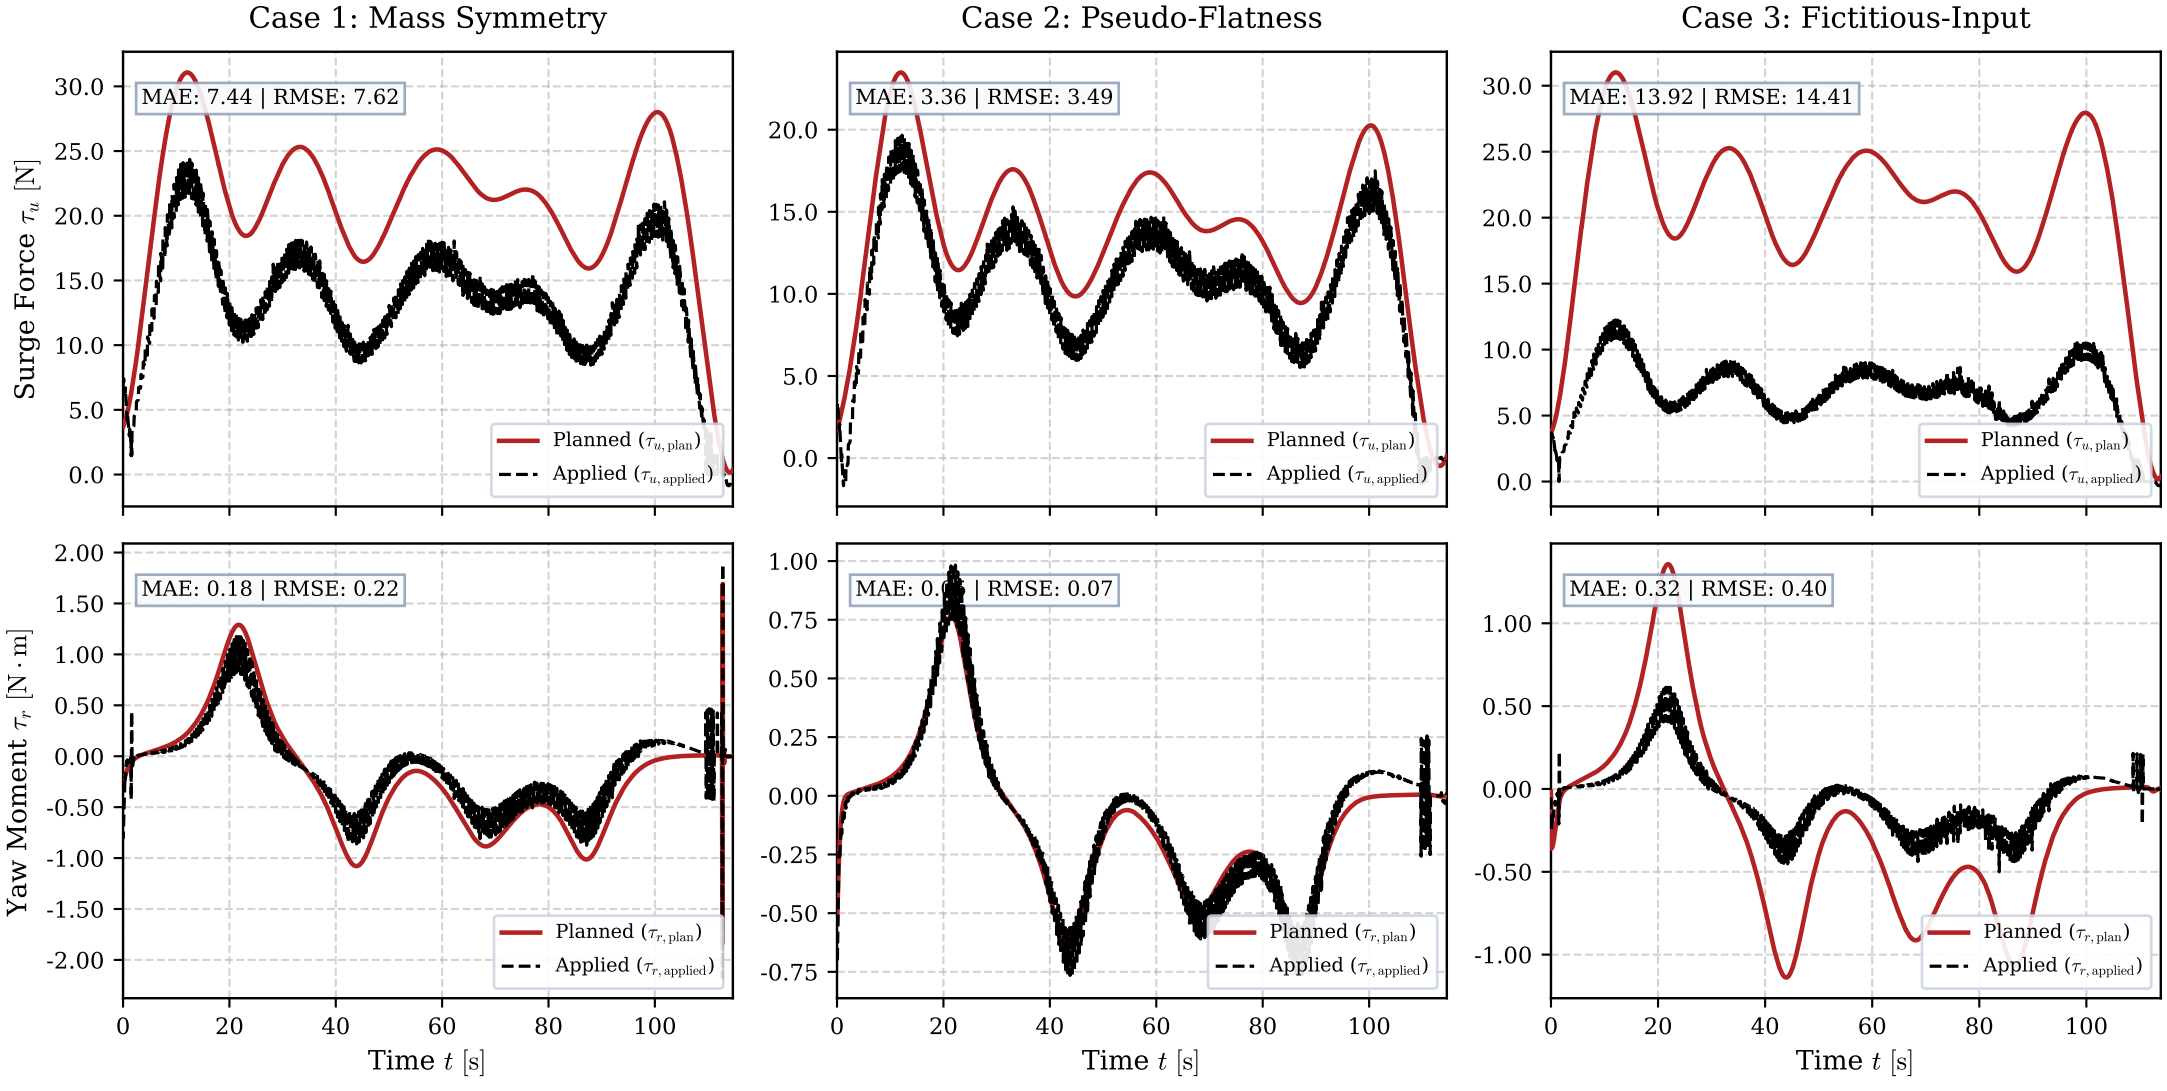

RealtimeController Control Inputs (τ_u, τ_r Planned vs. Applied)
Case 1: Mass Symmetry
Case 2: Pseudo-Flatness
Case 3: Fictitious-Input
Surge Force τ_u [N]
Yaw Moment τ_r [N · m]
Time t [s]
MAE: 7.44 | RMSE: 7.62
MAE: 3.36 | RMSE: 3.49
MAE: 13.92 | RMSE: 14.41
MAE: 0.18 | RMSE: 0.22
MAE: 0.0 | RMSE: 0.07
MAE: 0.32 | RMSE: 0.40
Planned ($\tau_{u,\text{plan}}$)
Applied ($\tau_{u,\text{applied}}$)
Planned ($\tau_{r,\text{plan}}$)
Applied ($\tau_{r,\text{applied}}$)