


Quick guide to use M5 RGB LED


- (1) Download and use the latest libraries from Github repo (or manually install AdaFruit_NeoPixel library in Arduino IDE).
- (2) Connect the LED module:



Use this cable

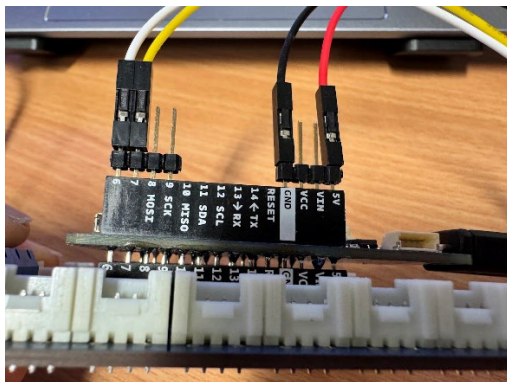

Connect the free-end (Black) connector cable to the Arduino Board using the provided gold-pin header.

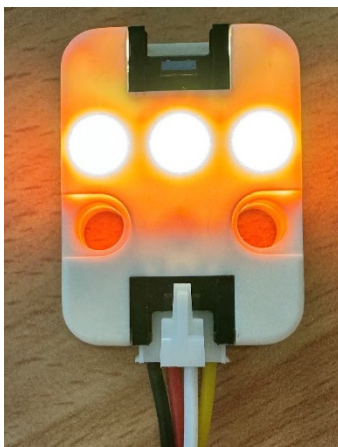

Connect the other end (white) of the connector cable to the LED Module (Take note to use the socket nearest to the module mounting holes).

(3) Run the sample program (a copy is in github - lab4: rgb_led_simple):

```
#include <Adafruit_NeoPixel.h>

// Which pin on the Arduino is connected to the NeoPixels?

#define PIN    6 // On Trinket or Gemma, suggest changing this to 1

// How many NeoPixels are attached to the Arduino?

#define NUMPIXELS 3 // M5 RGB LED has only 3 LEDs

// When setting up the NeoPixel library, we tell it how many pixels,
// and which pin to use to send signals. Note that for older NeoPixel
// strips you might need to change the third parameter -- see the
// strandtest example for more information on possible values.
Adafruit_NeoPixel pixels(NUMPIXELS, PIN, NEO_GRB + NEO_KHZ800);

void setup()
{
  pixels.begin(); // INITIALIZE NeoPixel strip object (REQUIRED)
}

void loop()
{
  pixels.clear(); // Set all pixel colors to 'off'
  pixels.show(); // Send the updated pixel colors to the hardware.
  delay(2000); //

  pixels.setPixelColor(0, pixels.Color(255, 0, 0)); // LED 0 - Red
  pixels.setPixelColor(1, pixels.Color(0, 255, 0)); // LED 1 - Green
  pixels.setPixelColor(2, pixels.Color(0, 0, 255)); // LED 2 - Blue
  pixels.show(); // Send the updated pixel colors to the hardware.
  delay(2000);
}
```