

8 drum inputs

Piezo on the jack: tip +, sleeve −. With nothing plugged in, the jack's switch (TN) holds the tip at GND.
1M bleeds the piezo, 10k + 5.1 V zener clamp its spikes, 1k protects the Mega pin.


JACK1 -> A0

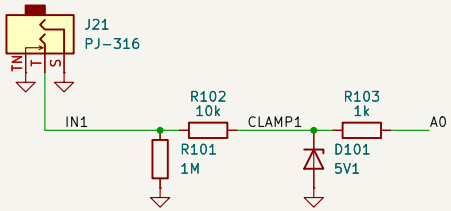


JACK2 -> A1

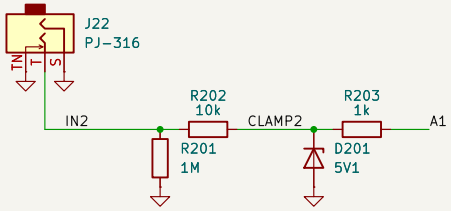


JACK3 -> A2

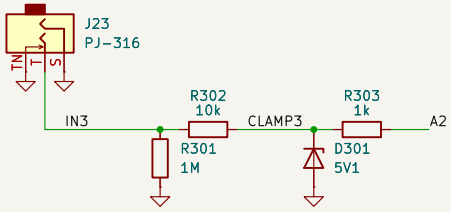


JACK4 -> A3

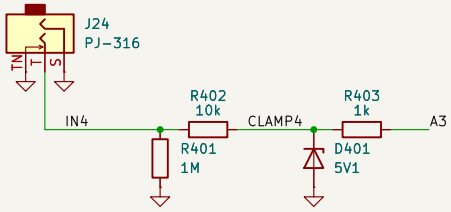


JACK5 -> A4

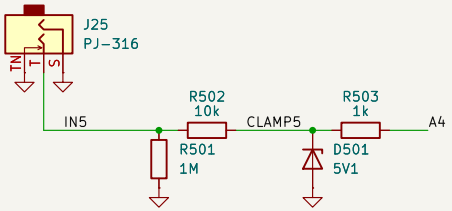


JACK6 -> A5

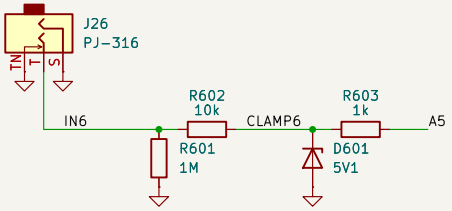

JACK7 -> A6

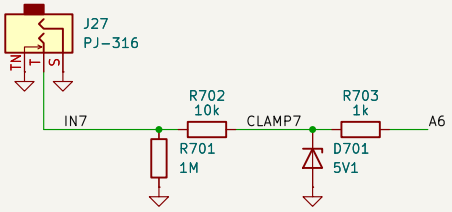


JACK8 -> A7

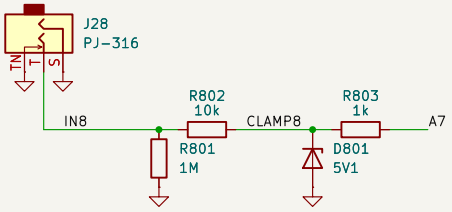


To the Arduino Mega (pin headers under the board)


Mega A0–A7




Mega COMMUNICATION




Mega A8–A15




Mega 5V (end of the 2x18 header)



Mega POWER




MIDI OUT (to the WIDI Master)

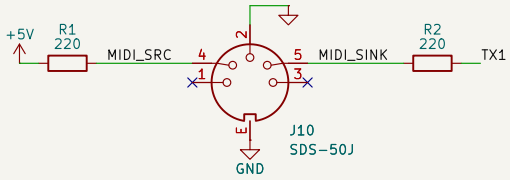

Pin 4 = source (5V through R1), pin 5 = sink (TX1 through R2),
pin 2 and the shell (E) = GND, pins 1 and 3 not used.
The WIDI Master is powered from pins 4 and 2.

Sensitivity knob



10k pot on a cable: ends to 5V and GND, wiper to pin 1 (A8).

Test pads



Arduino Mega 2560 shield: 8 protected piezo inputs, MIDI OUT, sensitivity knob
Generated by build_shield.py together with the board: edit the script, not this file

Sheet: /		
File: body808-shield.kicad_sch		
Title: body808 shield		
Size: A4	Date:	**Rev: v1**
KiCad E.D.A. 10.0.8		Id: 1/1