

CERN practical days - RF

09:00

Ruben Heine Marvin Noll

14.03.2022

Outline

1 Forenoon Session

- Band Pass Filter
- Strip-Line BPM
- RF - Cavities


2 Afternoon Session

- Useless Repetition
- Coupling of an RF Cavity

3 Resume

4 Appendix


Band Pass Filter (1) - Transmission S_{12} , S_{21}

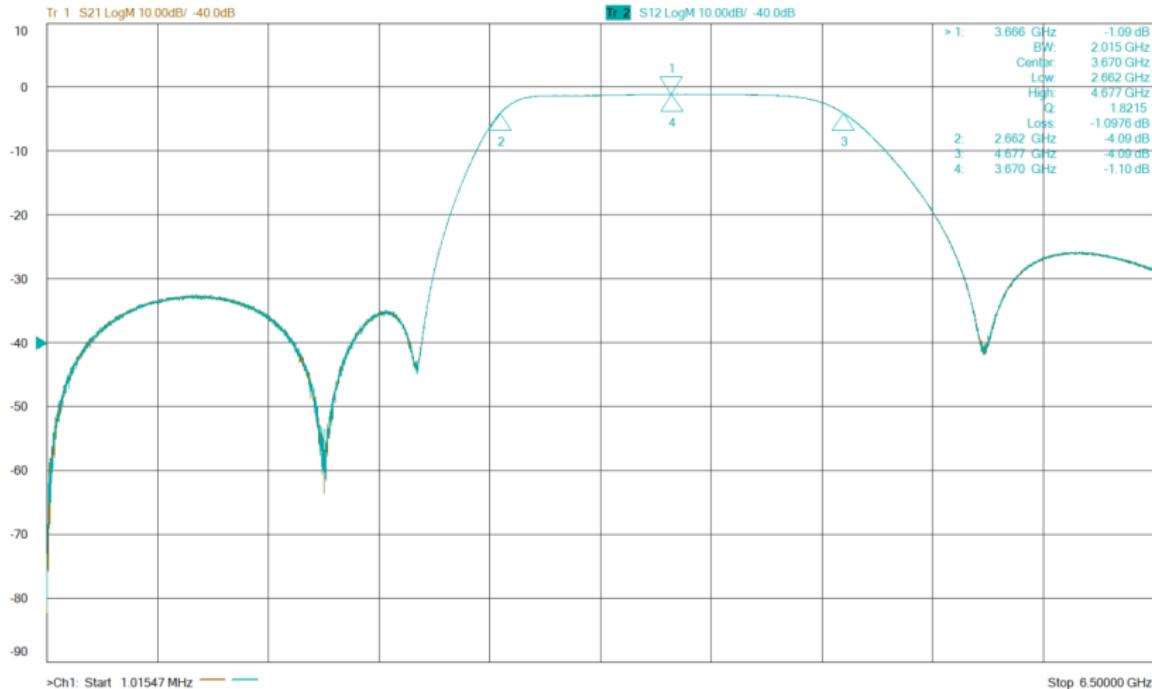

$$BW = 2.015 \text{ GHz}, \quad f = 2.66 \text{ GHz} \dots 4.67 \text{ GHz}$$


$S_{21} \approx S_{12} \Rightarrow \text{Reciprocal}$

Band Pass Filter (2) - Input/Output Reflection S_{11} , S_{22}

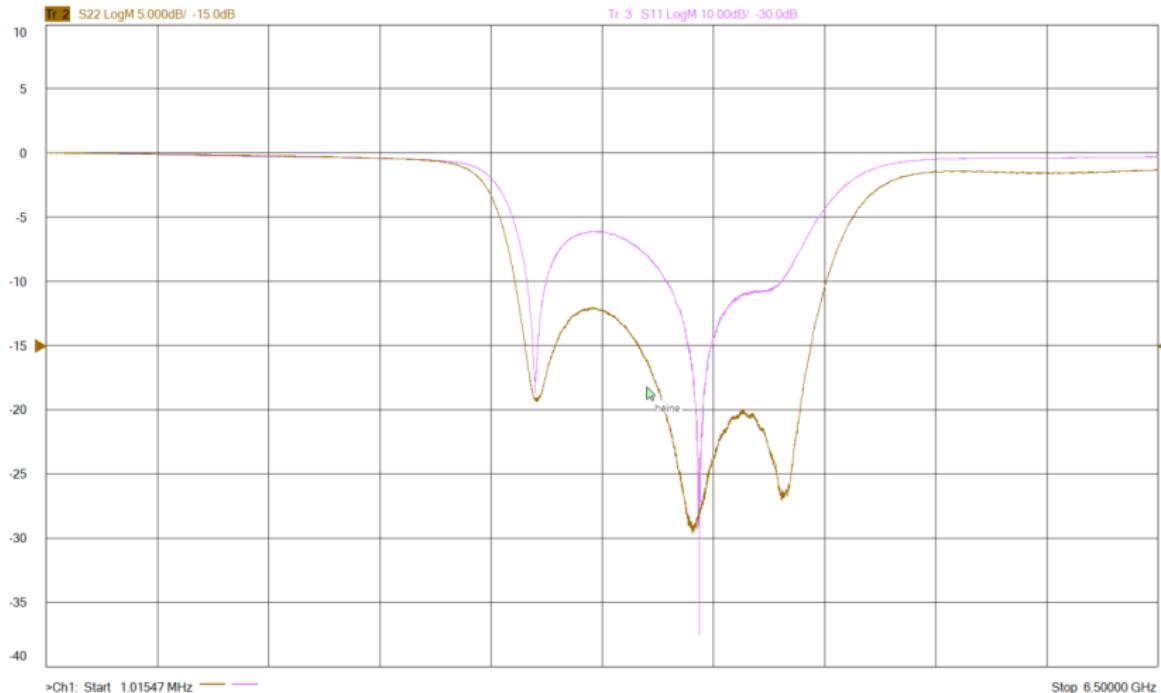


$$S_{11} \neq S_{22} \Rightarrow \text{Non symmetric}$$

Band Pass Filter (3) - Phase $\angle S_{12}$

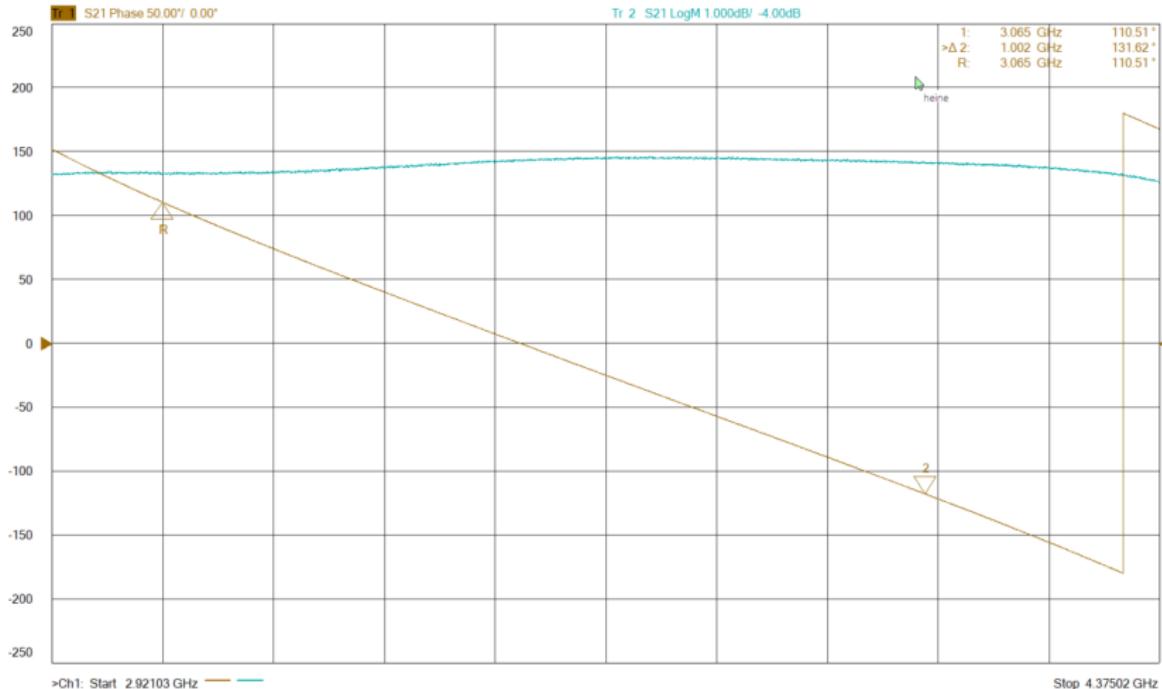

$$t_g = -\frac{d}{d\omega} \angle S_{12} \approx -\frac{\Delta \angle S_{12} [\text{rad}]}{\Delta \omega} = \frac{(360^\circ - 131.62^\circ) \cdot \pi/180}{2\pi \cdot 1.002 \text{ GHz}} = 633 \text{ ps}$$

Band Pass Filter (4) - Group Delay t_g

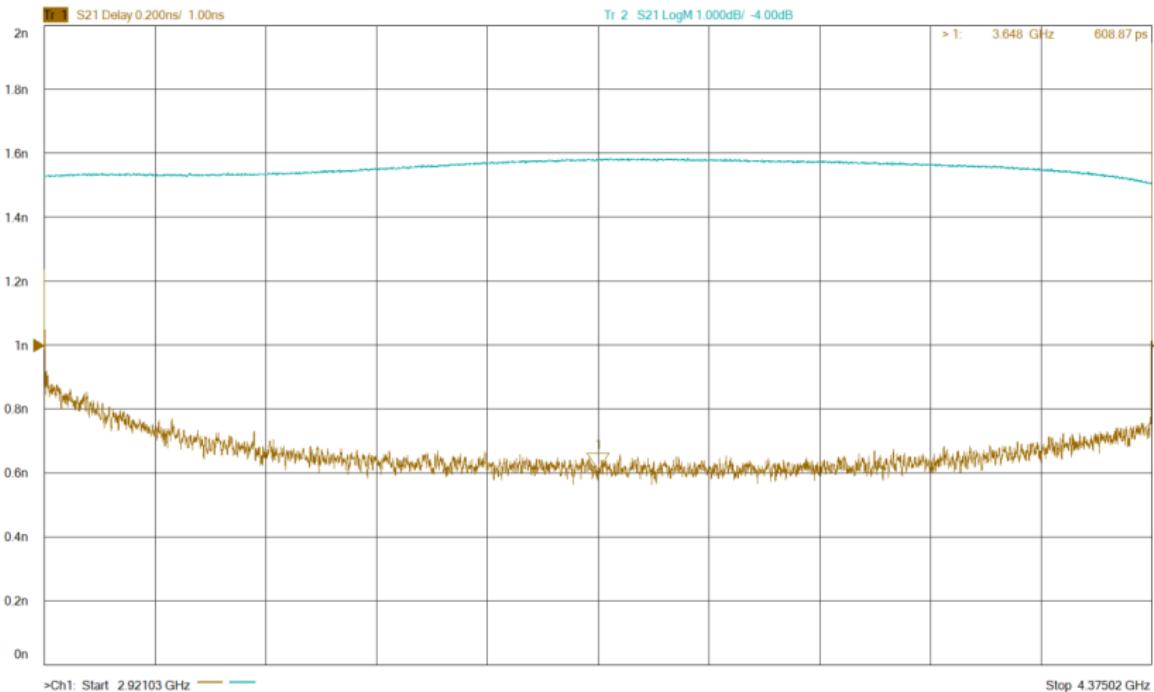

From group delay plot: $t_g = 608.87 \text{ ps}$


Strip-Line BPM (1) - Intro

Reflectometry for 500 MHz and 50Ω

a Connector

b Strip line


- ▶ Four 14 cm strips
- ▶ Short-circuit termination

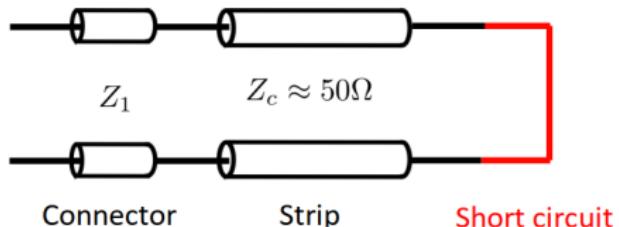


(a) Strip line: image and circuit

Strip-Line BPM (2) - Time Domain Reflectometry

- Measuring S_{11} in time domain to check acceptance criteria
 - a Connector: $+50 \text{ mU}$
 - b Strip line: $\pm 20 \text{ mU}$
- Strip line *blue* in specs, *gold* not in specs

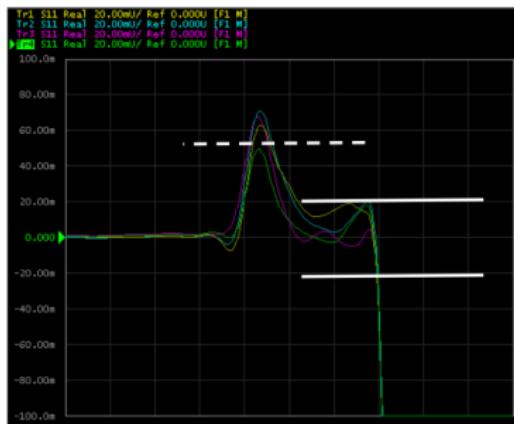


(b) TDR Aim

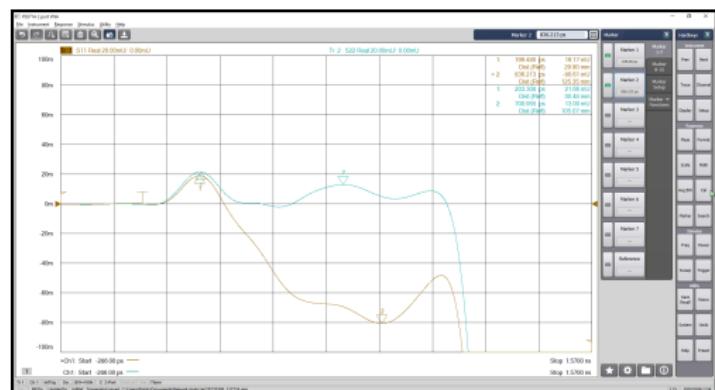


(c) TDR Reproduced

Strip-Line BPM (3) - Frequency Domain Characterization

- Strip-line length from S_{11}
 - ▶ from S_{11} : 1.086 ns, 162.77 mm
 - ▶ from phase: 1.218 ns, 182.58 mm
 - ▶ from group delay: 1.32 ns, 197.87 mm
- Cross-talk from S_{21}
 - ▶ Maximum reflection of -25.25 dB at 797.68 MHz
 - ▶ Reflection of -53.06 dB at operation frequency 500 MHz

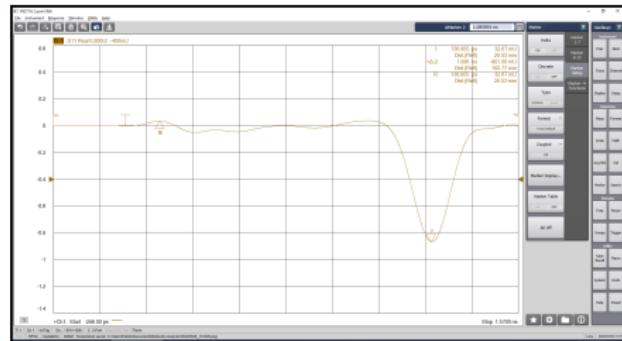

(d) Calculation from S_{11}

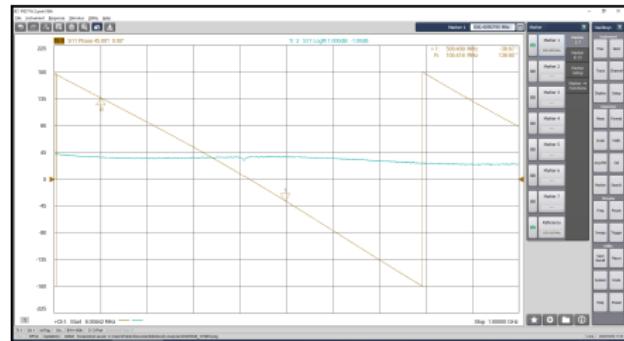


(e) Calculation from phase

RF - cavities (1) - Intro

- Multi cell cavity in X-band
- Operating mode at 11.424 GHz
- Under coupled antenna




(f) Multi cell cavity

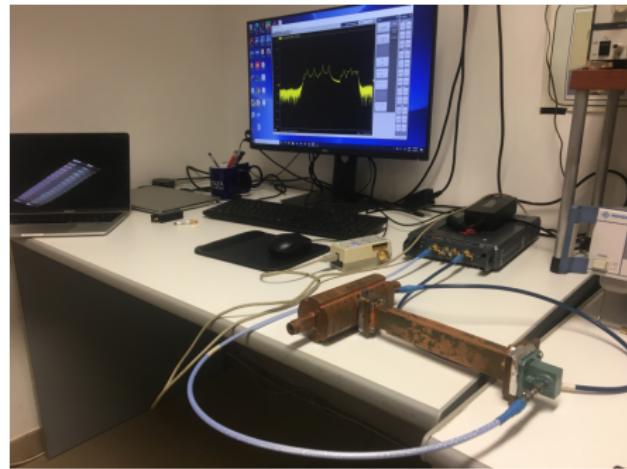


(g) Setup

RF - cavities (2) - Transmission measurement

- Identify different modes
- Calculated Q from the 3 dB bandwidth: 3093

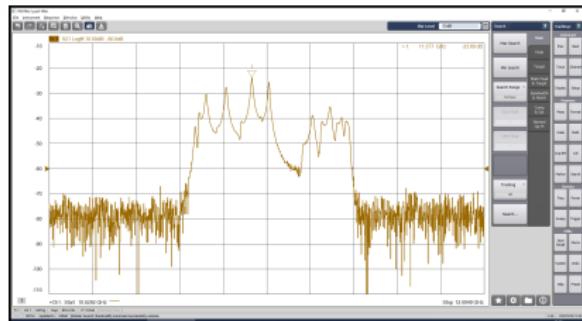


(h) All modes (S_{21})

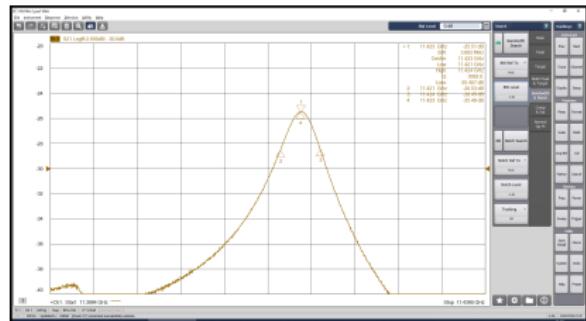


(i) Q for a certain mode

RF - cavities (3) - Transmission measurement

- Identify SWR
- Under coupling (S_{11} in Smith Chart)

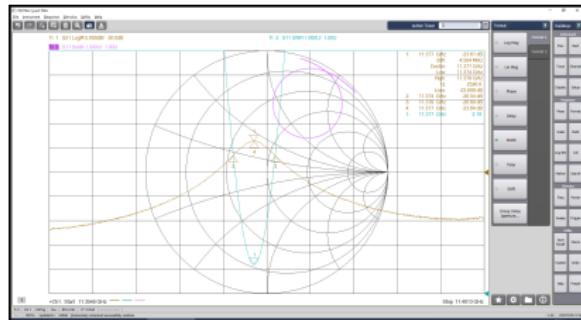

(j) Caption a

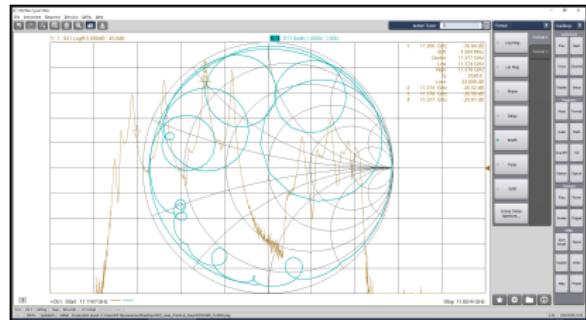


(k) Caption b

Useless Repetition (Manfred Wendt)


- Stuff
- More Stuff

RF Cavity, Coupling, Smith Chart (Fritz Caspers)


- Two Antennas in cavity
 - ▶ Longitudinal field antenna
 - ▶ Coupling loop
- Under-, over- and critical coupling

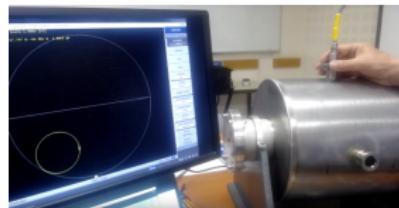

(l) Under Coupled

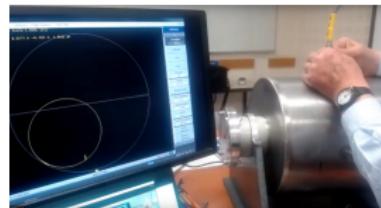

(m) Critically Coupled

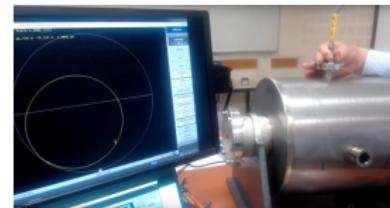

(n) Over Coupled


Resume

- Network Analyser
 - ▶ Time and Frequency Domain
 - ▶ Scattering parameter, Impedance, SWR, phase
 - ▶ Calculation of Q , reflexion coefficient
- Spectrum Analyser (Modulation)
- Cavities
- Coupling
 - ▶ Under, over and critical coupling
 - ▶ Smith chart




(o) Cavity setup

Appendix (1) - Multi mode cavity

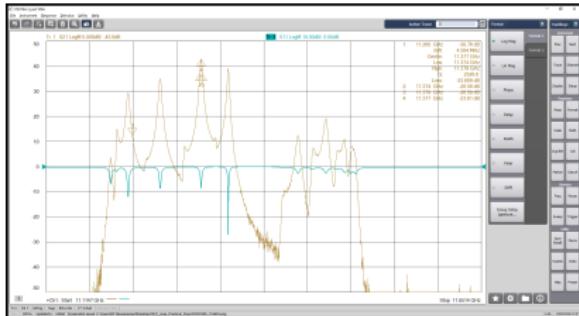

(p)

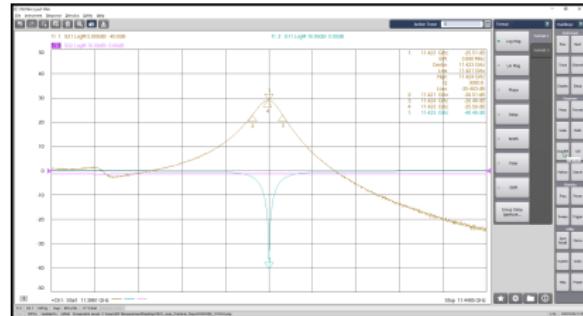

(q)