



## Data Specs

### Nema-23 Stepper Motor + Driver Kit

A stepper motor to satisfy all your 3D-Printer, robotics, Linear Motion projects needs! This 4-wire uni-polar/bipolar stepper motor has 1.8° per step for smooth motion and a nice holding torque. This motor specified to have a max current of 3A/phase so that it could be driven easily with common motor shield for Arduino (or other motor driver) and a wall adapter or lead-acid battery.




**SKU: FAM1040**

#### Brief Data (Motor):


- Model: 57BYG250B-6.35.
- Phase: 2 Phase 4-wires.
- Rated Phase Current: 3A.
- Step Angle: 1.8° Degree.
- Motor Shaft Diameter: Ø6.35mm D-Shape.
- Operating Voltage: 12V~24V DC.
- Holding Torque: 1.2N.m.
- Shaft Radial force: 10Kg/cm.
- Wire length: 100cm.
- Frame size: 56mm x 56mm.
- Motor Body Length LMAX: 56mm.Weight: 770 grams.

## Connection Diagram:

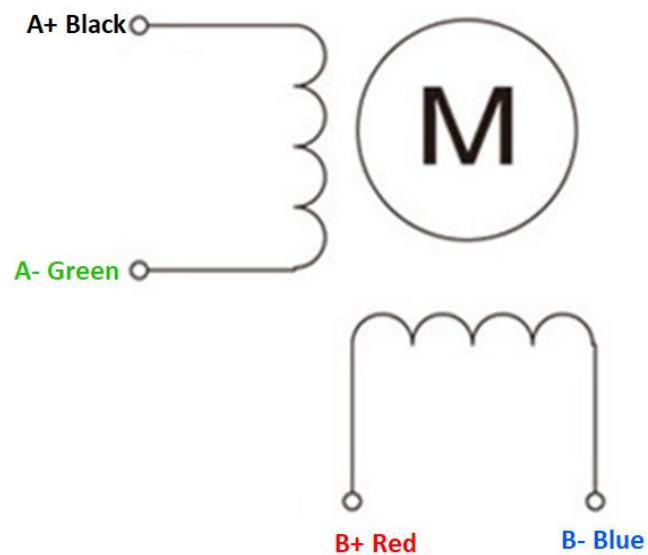

## Mechanical Dimension:

Unit: mm

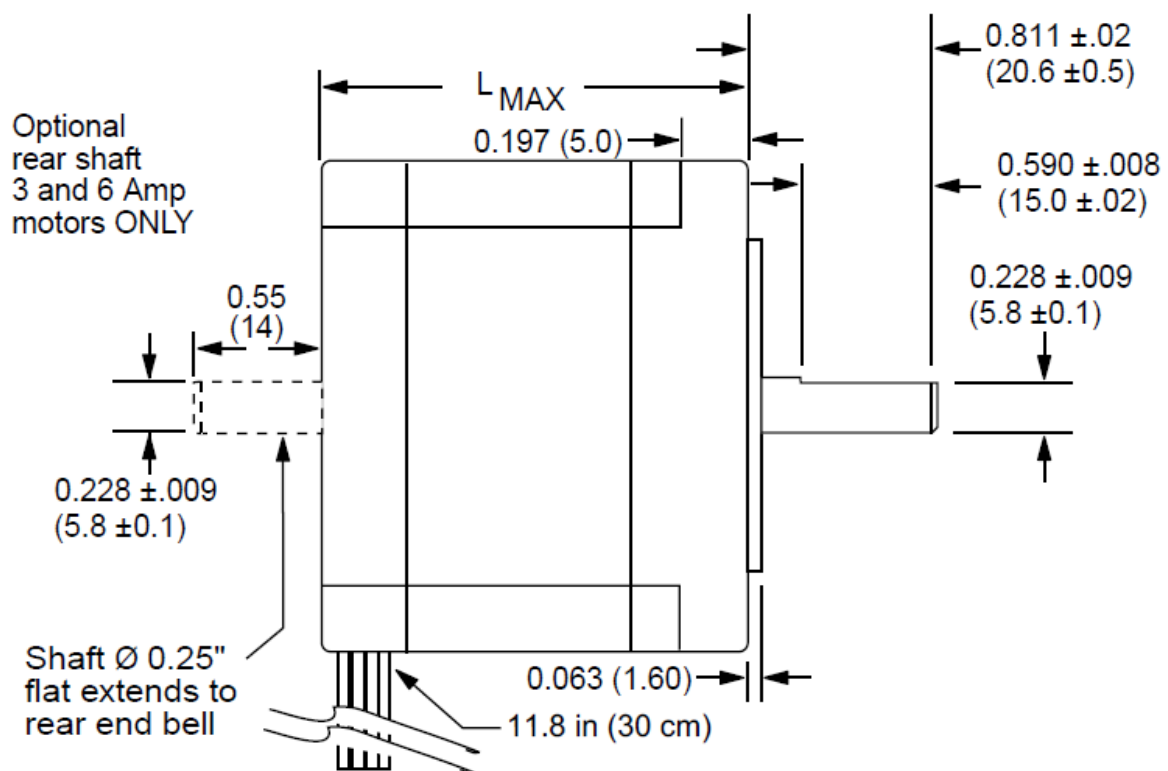

# FRONT VIEW

Ø 1.500 ±.002  
(Ø 38.10 ±.05)

Ø 0.25 +0/-.001  
(Ø 6.35 +0/-.013)

4X Ø 0.197 (5.0)  
±.010 (.25) holes  
equally spaced on a  
2.625 (66.67) DBC.


□ 1.85  
(□ 47.1)

□ 2.22  
(□ 56.39)



## TB6600 4.0A Stepper Motor Driver

TB6600 is an easy-to-use professional stepper motor driver, which could control a two-phase stepping motor. It is compatible with Arduino and other microcontrollers that can output a 5V digital pulse signal. TB6600 stepper motor driver has a wide range power input. And it is able to output 4A peak current, which is enough for the most of stepper motors. 6 DIP switch for micro steps and output drive current setting. All signal terminals adopt high-speed opto-coupler isolation, enhancing its ground loop interference ability. As a professional device, it is able to drive 57, 42-type 2-phase, 4-phase, hybrid stepper motors.

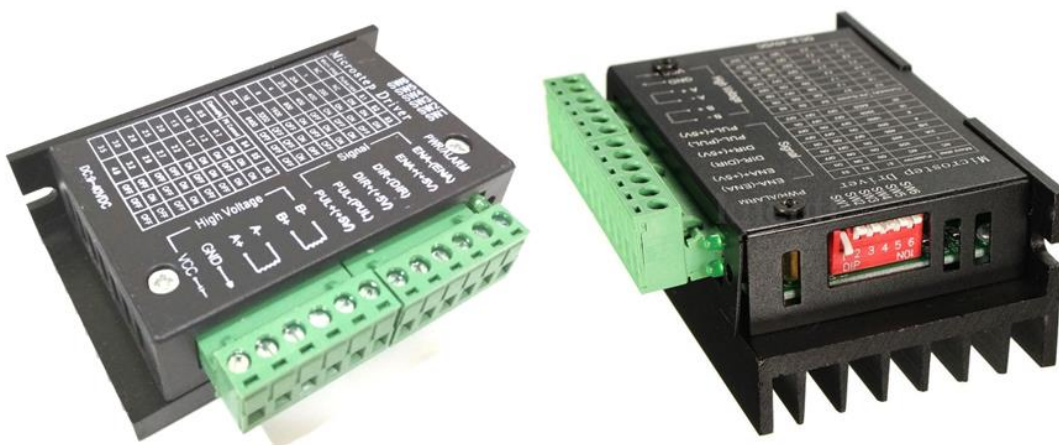


**SKU: MDU1059**


### **Specifications:**

- Input Voltage: 9V~40V.
- Input Current: 0~5A.
- Output Current: 0.5-4.0A.
- Power (MAX): 160W.
- Micro Step: 1, 2/A, 2/B, 4, 8, 16, 32.
- Temperature: -10~45°C
- Dimension: 96x56x33 mm.
- Weight: 0.2 kg.


### Mechanical Dimension:

Unit: mm

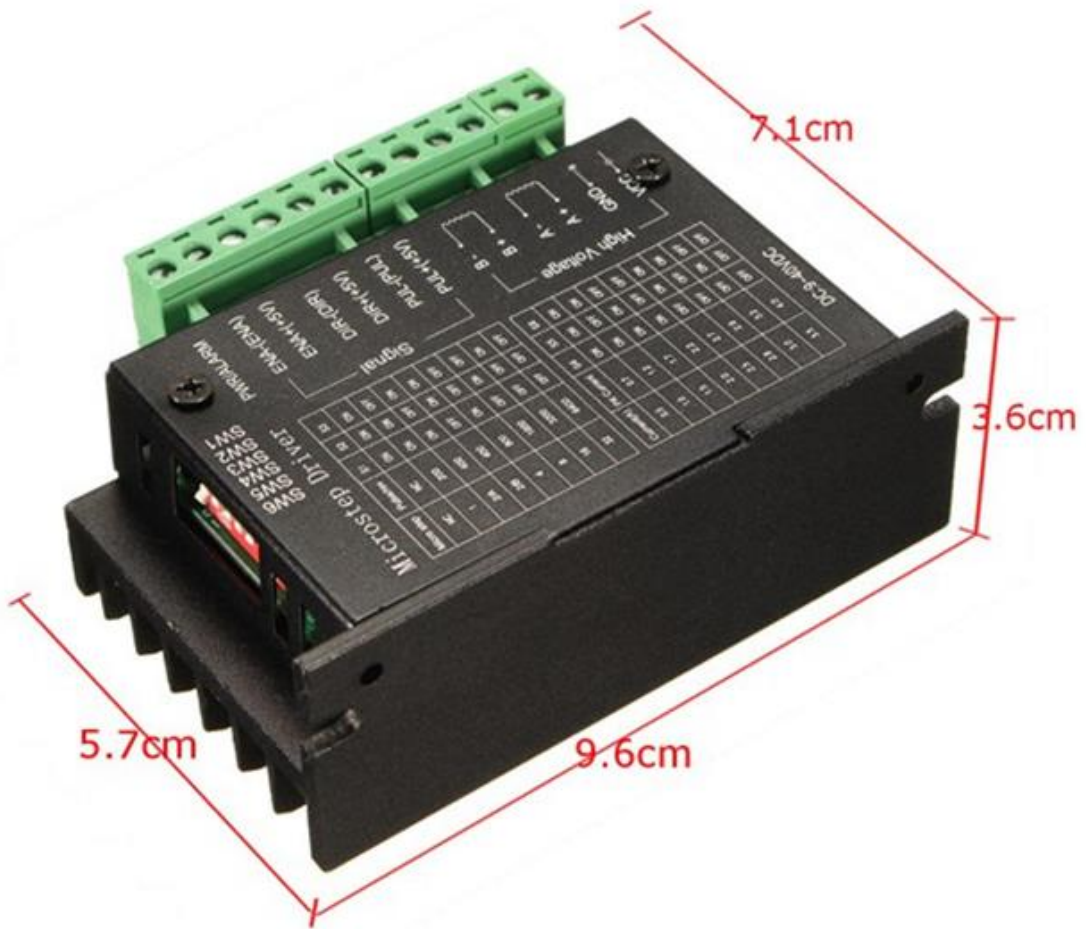

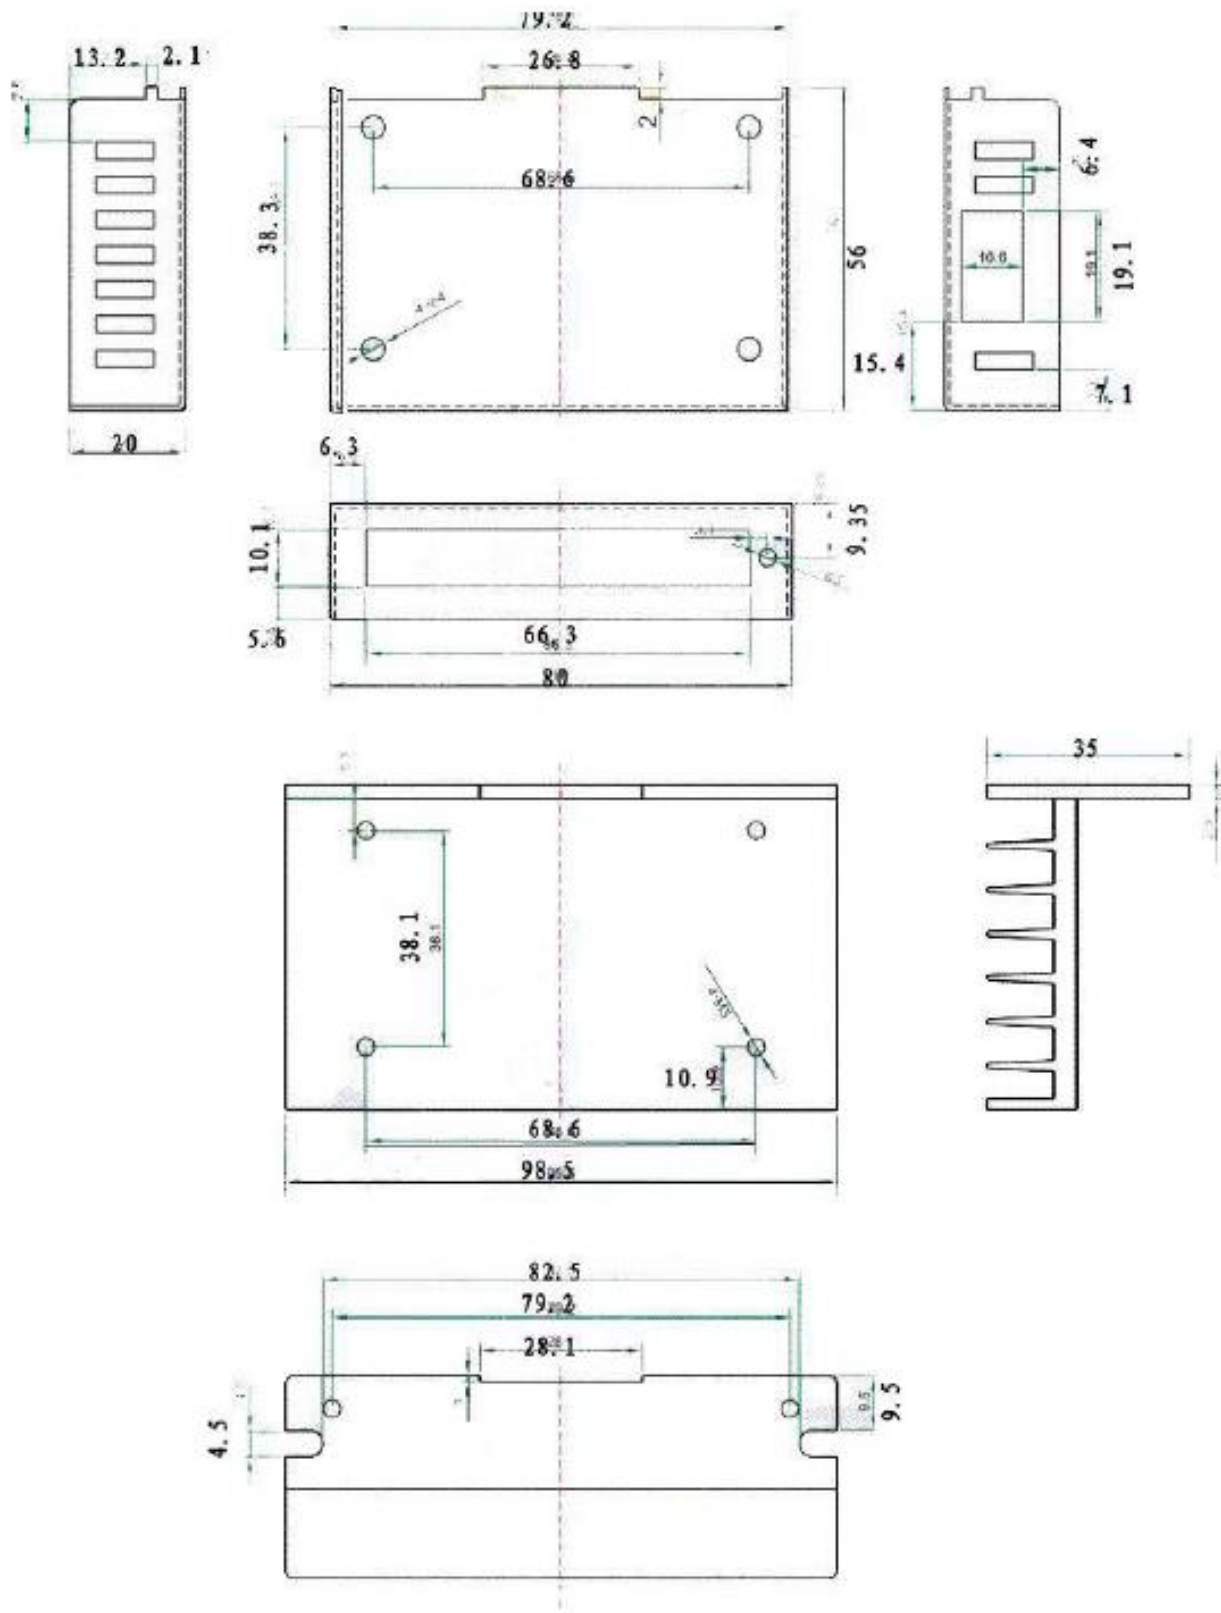

The following diagram shows how to connect the stepper driver within you application. Review the documentation of the electronics for details on the three signal lines. Note that the voltage applied from the microprocessor should be 5V. You can connect a 9 to 42V DC power source to VCC/GND.



## DIP Switch Setting:

You can set the current and microsteps using the dip switches SW1-SW6 on the side. Refer to the following tables for details.

### Microsteps

Micro steps	Pulse/rev	SW1	SW2	SW3
-	-	ON	ON	ON
1	20	ON	ON	OFF
2/A	400	ON	OFF	ON
2/B	400	OFF	ON	ON
4	800	ON	OFF	OFF
8	1600	OFF	ON	OFF
16	3200	OFF	OFF	ON
32	6400	OFF	OFF	OFF


### Current setting

Current (A)	Peak current	SW4	SW5	SW6
0.5	0.7	ON	ON	ON
1.0	1.2	ON	OFF	ON
1.5	1.7	ON	ON	OFF
2.0	2.2	ON	OFF	OFF
2.5	2.7	OFF	ON	ON
2.8	2.9	OFF	OFF	ON
3.0	3.2	OFF	ON	OFF
3.5	4.0	OFF	OFF	OFF



## Arduino Connection Application Example:

In this section, we'll show you how to use TB6600 with Arduino to drive stepper motor quickly. Wiring up the TB6600 driver to Arduino Uno controller board as shown below:

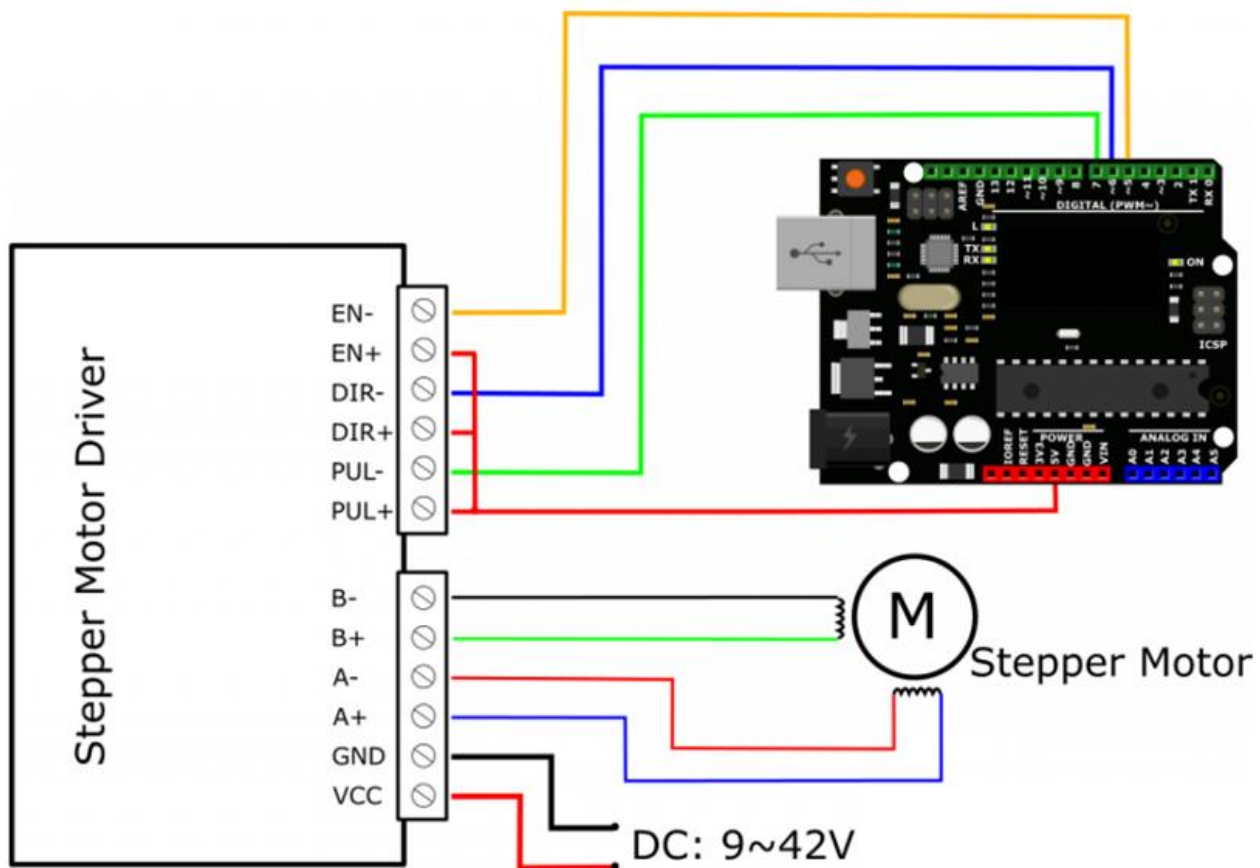

Copy and paste the below sketch into Arduino IDE and upload to Arduino Uno board:

```
/*=====
// Author      : Handson Technology
// Project     : Arduino Uno
// Description  : TB6600 Stepper Motor Driver
// Source-Code : tb6600.ino
//=====
*/

int PUL=7; //define Pulse pin
int DIR=6; //define Direction pin
int ENA=5; //define Enable Pin

void setup() {
  pinMode (PUL, OUTPUT);
  pinMode (DIR, OUTPUT);
  pinMode (ENA, OUTPUT);
}
```

```
void loop() {  
  for (int i=0; i<6400; i++)    //Forward 5000 steps  
  {  
    digitalWrite(DIR,LOW);  
    digitalWrite(ENA,HIGH);  
    digitalWrite(PUL,HIGH);  
    delayMicroseconds(50);  
    digitalWrite(PUL,LOW);  
    delayMicroseconds(50);  
  }  
  for (int i=0; i<6400; i++)    //Backward 5000 steps  
  {  
    digitalWrite(DIR,HIGH);  
    digitalWrite(ENA,HIGH);  
    digitalWrite(PUL,HIGH);  
    delayMicroseconds(50);  
    digitalWrite(PUL,LOW);  
    delayMicroseconds(50);  
  }  
}
```

After successful upload, the stepper motor attached to TB6600 driver board will turn forward and backward continuously.

### **Web Resources:**

- [SMPS Power Supply Module](#)
- [775 Ball Bearing DC Motor](#)
- [A58SW-555 Worm Gear Motor](#)
- [JGB37-3530 Metal Gear Motor](#)
- [Motor Bracket](#)



# Handsontec.com

**We have the parts for your ideas**

---

HandsOn Technology provides a multimedia and interactive platform for everyone interested in electronics. From beginner to diehard, from student to lecturer. Information, education, inspiration and entertainment. Analog and digital, practical and theoretical; software and hardware.



open source  
hardware

HandsOn Technology support Open Source Hardware (OSHW) Development Platform.

*Learn : Design : Share*

*handsontec.com*



## The Face behind our product quality...

In a world of constant change and continuous technological development, a new or replacement product is never far away – and they all need to be tested.

Many vendors simply import and sell without checks and this cannot be the ultimate interests of anyone, particularly the customer. Every part sold on Handsontec is fully tested. So when buying from Handsontec products range, you can be confident you're getting outstanding quality and value.

We keep adding the new parts so that you can get rolling on your next project.



[www.handsontec.com](http://www.handsontec.com)

[Breakout Boards & Modules](#)



[Connectors](#)



[Electro-Mechanical Parts](#)



[Engineering Material](#)



[Mechanical Hardware](#)



[Electronics Components](#)

P



[www.handsontec.com](http://www.handsontec.com)

[Power Supply](#)



[Arduino Board & Shield](#)

Tools & Accessory



[www.handsontec.com](http://www.handsontec.com)

[Tools & Accessory](#)