





Environment Logger – schematic (module level)

ESP32-S3-DevKitM-1 + BME280 + DS3231 on one I2C bus (400 kHz), 2 status LEDs, 1 button

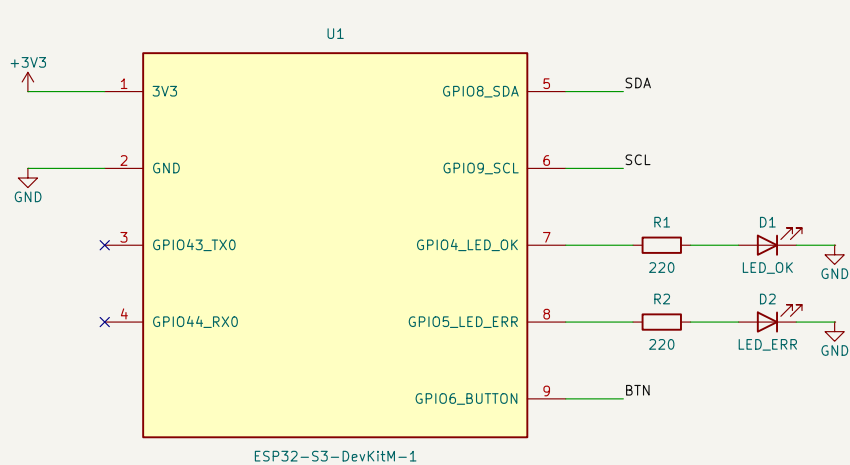

- Notes
1. I2C pull-ups: no external resistors. The modules already have them (BME280: 10k per line, DS3231: 4.7k per line, about 3.2k in parallel).
 2. I2C addresses: BME280 = 0x76, DS3231 = 0x68, SDA = GPIO8, SCL = GPIO9.
 3. Power: 5V enters via the DevKitM-1 USB connector; the on-board regulator supplies 3V3 to both modules.
 4. UART0 (GPIO43/44) is wired on the DevKitM-1 to its USB-UART bridge; the log is read through the same USB connector.
 5. LED series resistors 220 ohm. The button is a 3-pin module (VCC, GND, OUT) with an on-board pull-down: OUT is low at rest and high while pressed.
 6. Unused module pins left unconnected: BME280 CSB and SDO (address 0x76 is the module default), DS3231 DS.

Sheet: /		
File: env-logger.kicad_sch		
Title: Environment Logger		
Size: A4	Date: 2026-10-03	Rev: 0.1
KiCad E.D.A. 10.0.4	Id: 1/1	