

Coaxolotl - block diagram

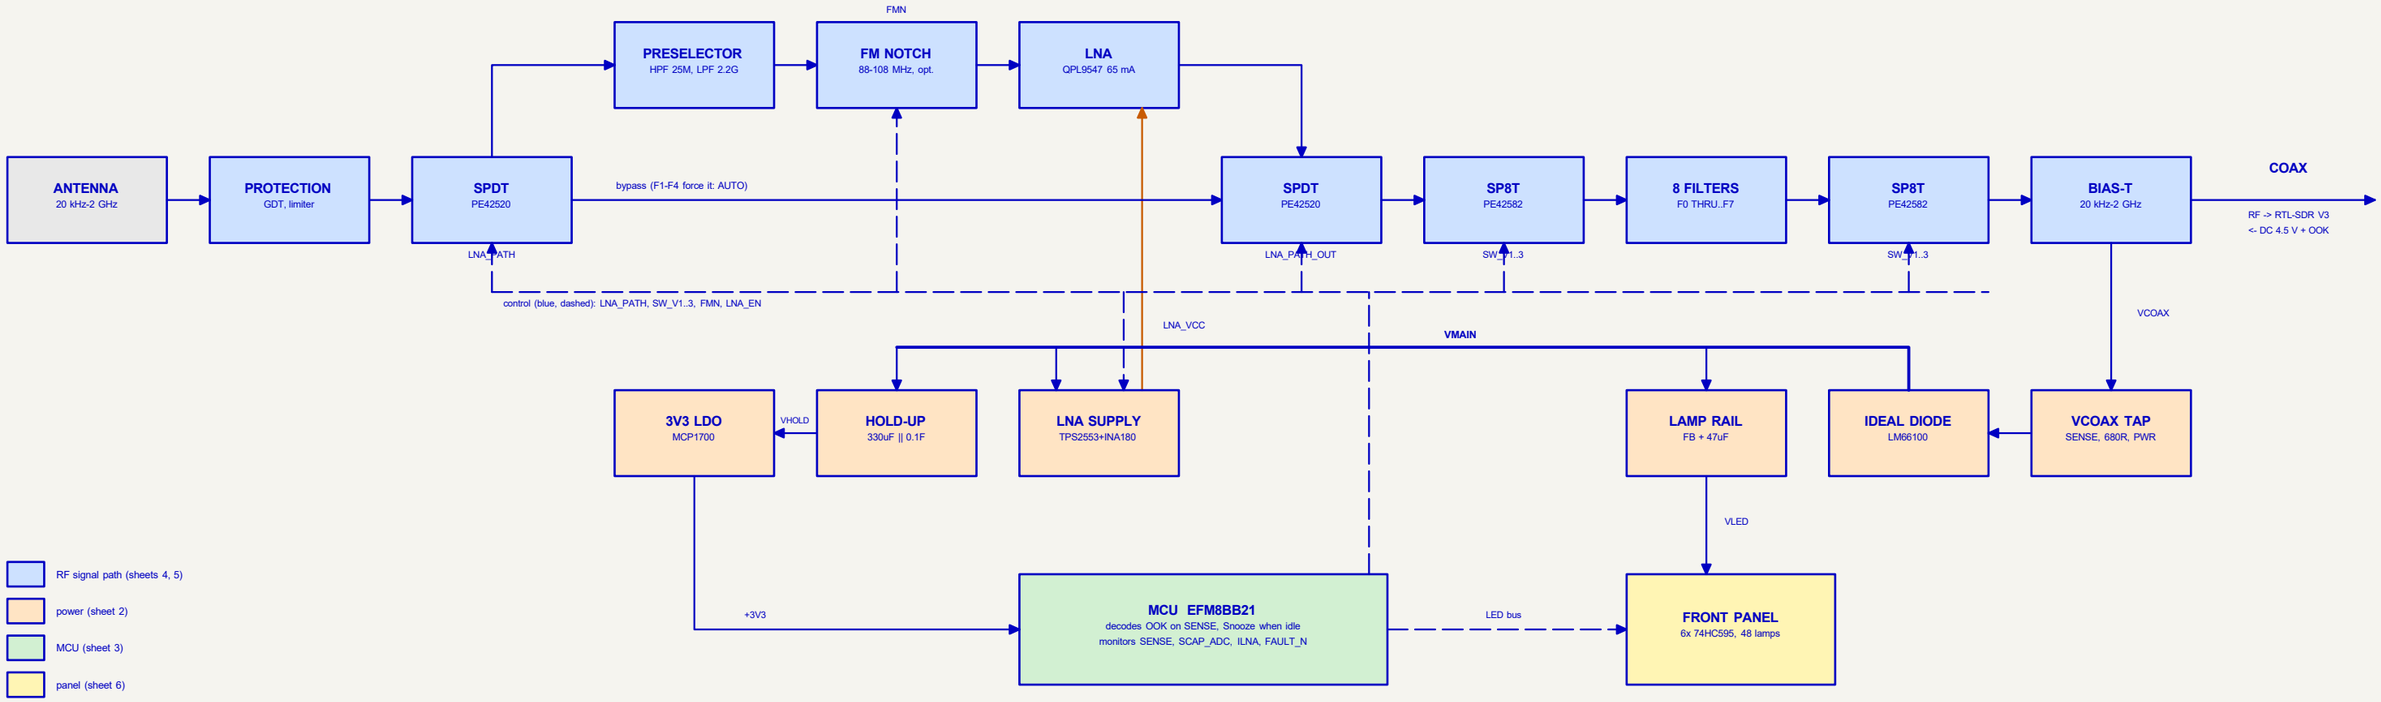

Sheets

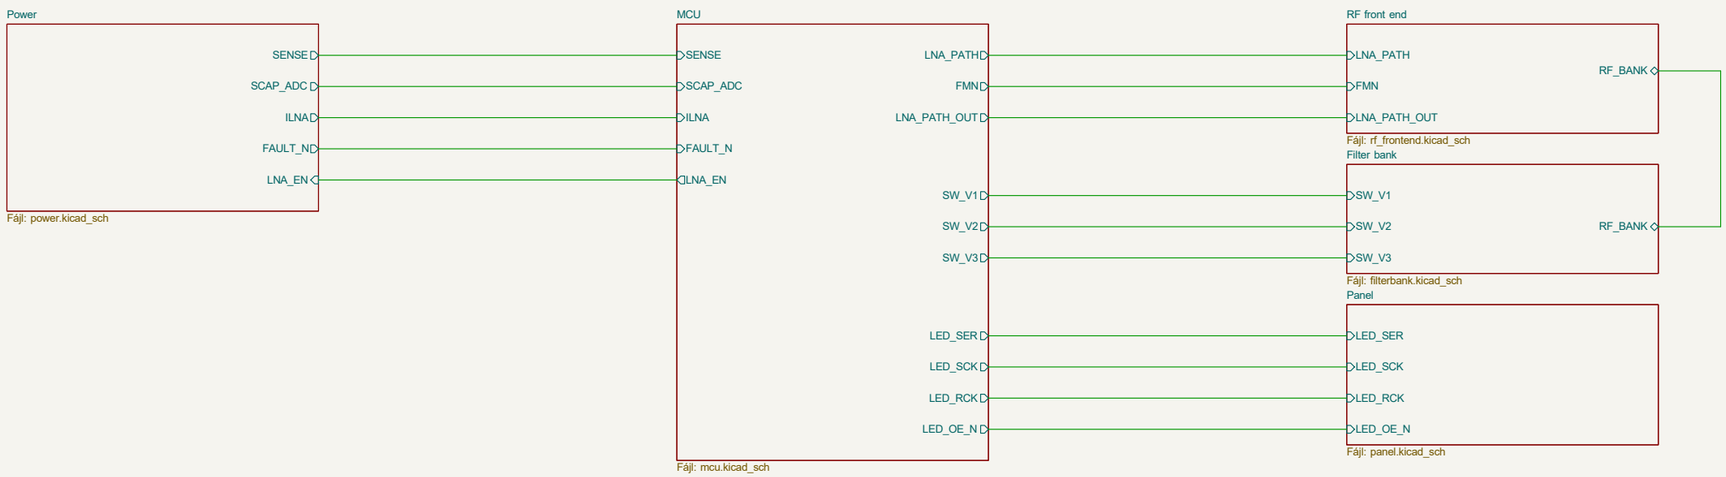


Power and ground cross sheets only as power symbols (VCOAX, VMAIN, VHOLD, VLED, LNA_VCC, +3V3, GND).

Signals cross sheets as hierarchical labels through the sheet pins above. Firmware pin map: firmware/src/hal_efm8bb2.c

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
Bias-T powered, OOK switched LNA + 8-way filter bank
z2labs

Sheet: /		
File: coaxolotl.kicad_sch		
Title: Coaxolotl		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 1/6


VCOAX tap

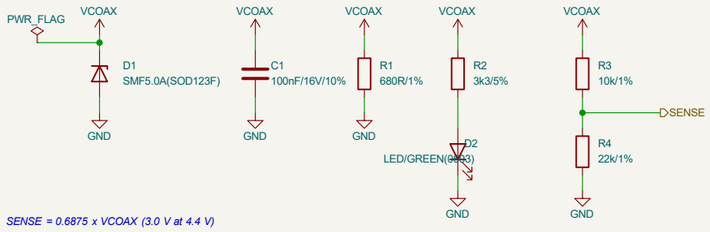

SENSE = 0.6875 x VCOAX (3.0 V at 4.4 V)

t_fall = 1.1 x R_eff x C_total: R1 sets the OOK falling edge


Ideal diode



CE = VOUT: comparator blocks

reverse current in OOK gaps


LNA supply + current monitor

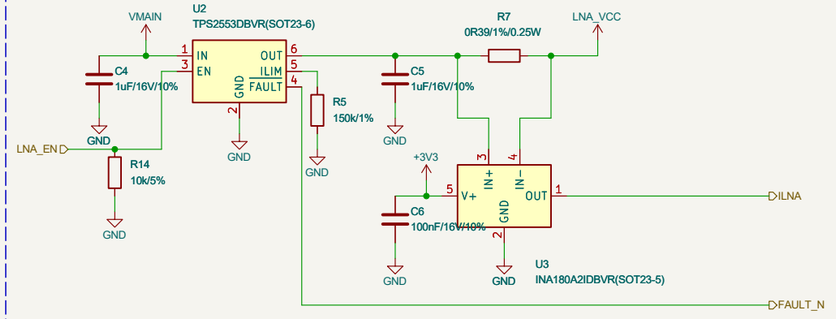

Ilim = f(R5), TPS2553 Eq.1: VERIFY IOS(min) > 130 mA

ILNA = 0.39R x 50 V/V = 19.5 mV/mA (100 mA -> 1.95 V); Kelvin taps at R7 pads


Lamp rail



48 lamps x 1 mA max on VMAIN:

dark in OOK gaps, no hold-up drain

Hold-up (diode-OR)

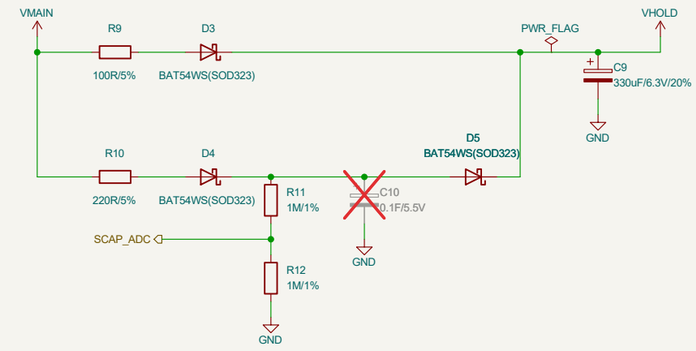


fast path R9/D3: VHOLD up in ~30 ms (100R x 330uF) -> MCU boots

slow path R10/D4: tau ~22 s (220R x 0.1F); ride-through ~4 min at 0.6 mA

SCAP_ADC = VSCAP / 2 (HOLD lamp at >= 3.6 V)

3V3 regulator

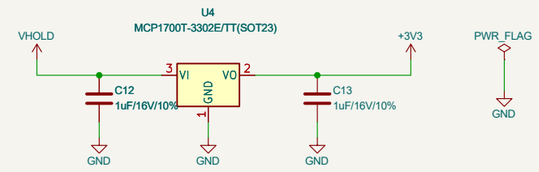

MCP1700: Iq 1.6 uA, dropout 178 mV;

VO needs >= 1 uF ceramic


Generated by hardware/kicad/tools/build.py — edit the Python, not this file

VCOAX tap, ideal diode, LNA supply switch + current monitor, lamp rail, hold-up, 3V3

z2labs

Sheet: /Power/		
File: power.kicad_sch		
Title: Power		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 2/6

MCU

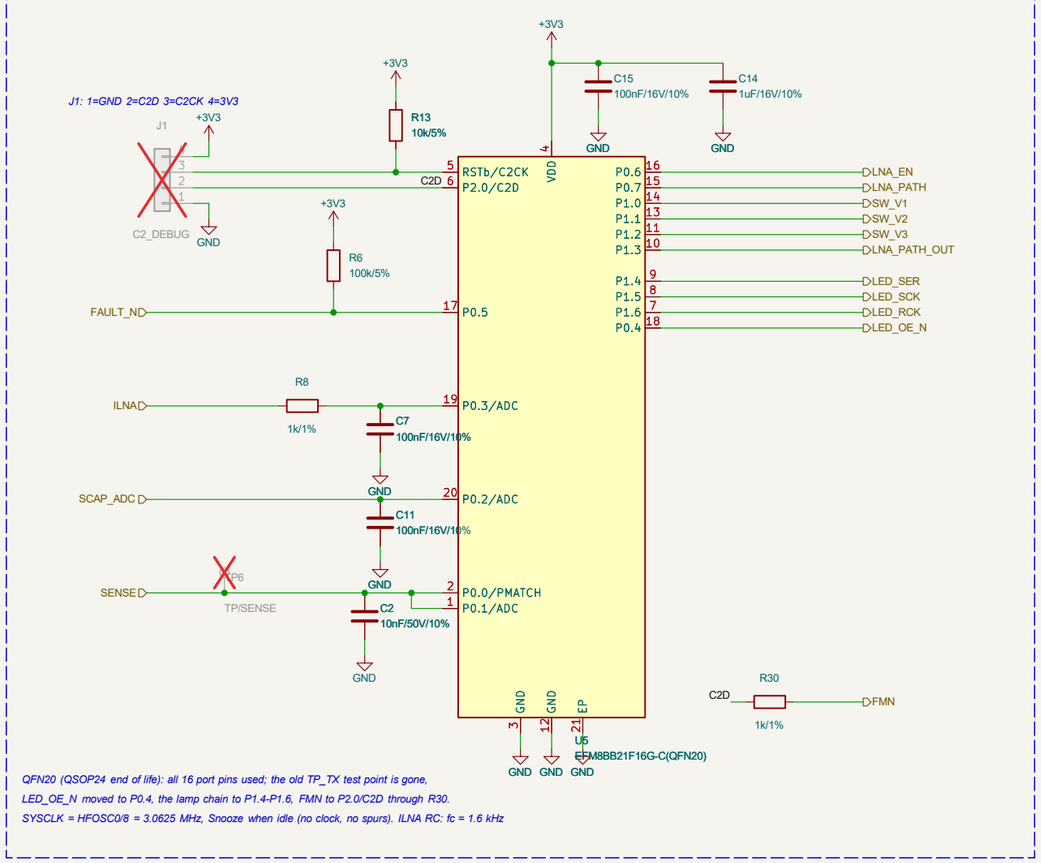

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
EFM8BB21F16G (QFN20), C2 debug, ADC input conditioning
z2labs

Sheet: /MCU/		
File: mcu.kicad_sch		
Title: MCU		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 3/6

Antenna input + protection

J2
SMA/EDGE(ANT)

GDT1
4532-091-LF(1812)

D6
BAV99W(SOT323)

R23
100k/5%

GDT 90 V, BAV99 low-C clamp, 100k bleed

LNA/BYP IN

C36
100nF/16V/10%

U6
PE42520C-Z(QFN16)

bypass: F1-F4 (HF/LF) always, LNA off or tripped

LNA/BYP OUT

C37
100nF/16V/10%

U7
PE42520C-Z(QFN16)

◇RF_BANK

LNA

LNA_VCC

C40
100pF/C0G

C32
100pF/C0G

FB2
FB0603/600R/1.3A

L4
560nH/5%

R25
3k32/1%

C30
100pF/C0G

L8
18nH/2%

C28
1nF/50V/C0G

C31
1nF/50V/C0G

U13
QPL9547TR7(DFN8-2x2)

SWL434 stage 1
+ 18 nH (EVB L1)
1 nF DC blocks

Preselector (LNA path only)

HPF: 5th-order Butterworth T, fc ~25 MHz

LPF: LTCC, fc ~2.2 GHz

C24
200pF/50V/C0G

C25
68pF/50V/C0G

C26
200pF/50V/C0G

L1
220nH/5%

L2
220nH/5%

U12
LFCN-2250+(FV1206)

R22
0R/0603

FM notch (DNP option)

U9
NA(PE42520C-Z)

L3
NA(56nH/2%)

C27
NA(47pF/C0G)

U10
NA(PE42520C-Z)

tank 56 nH || 47 pF: f0 = 98 MHz

Control inputs (reset-safe pull-downs)

FMN

R19
10k/5%

LNA_PATH (U6) and LNA_PATH_OUT (U7, own GPIO): 0 = bypass, 1 = LNA. FMN 0 = through. U7/U10: LS = GND.
PE42520 RF ports sit at 0 VDC: no blocking caps except around the LNA.

LNA_PATH

R15
10k/5%

LNA_PATH_OUT

R26
10k/5%


Generated by hardware/kicad/tools/build.py — edit the Python, not this file
Antenna protection, LNA/bypass select, preselector, FM notch option, LNA
z2labs

Sheet: /RF front end/
File: rf_frontend.kicad_sch


Title: RF front end

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 4/6

Filter bank

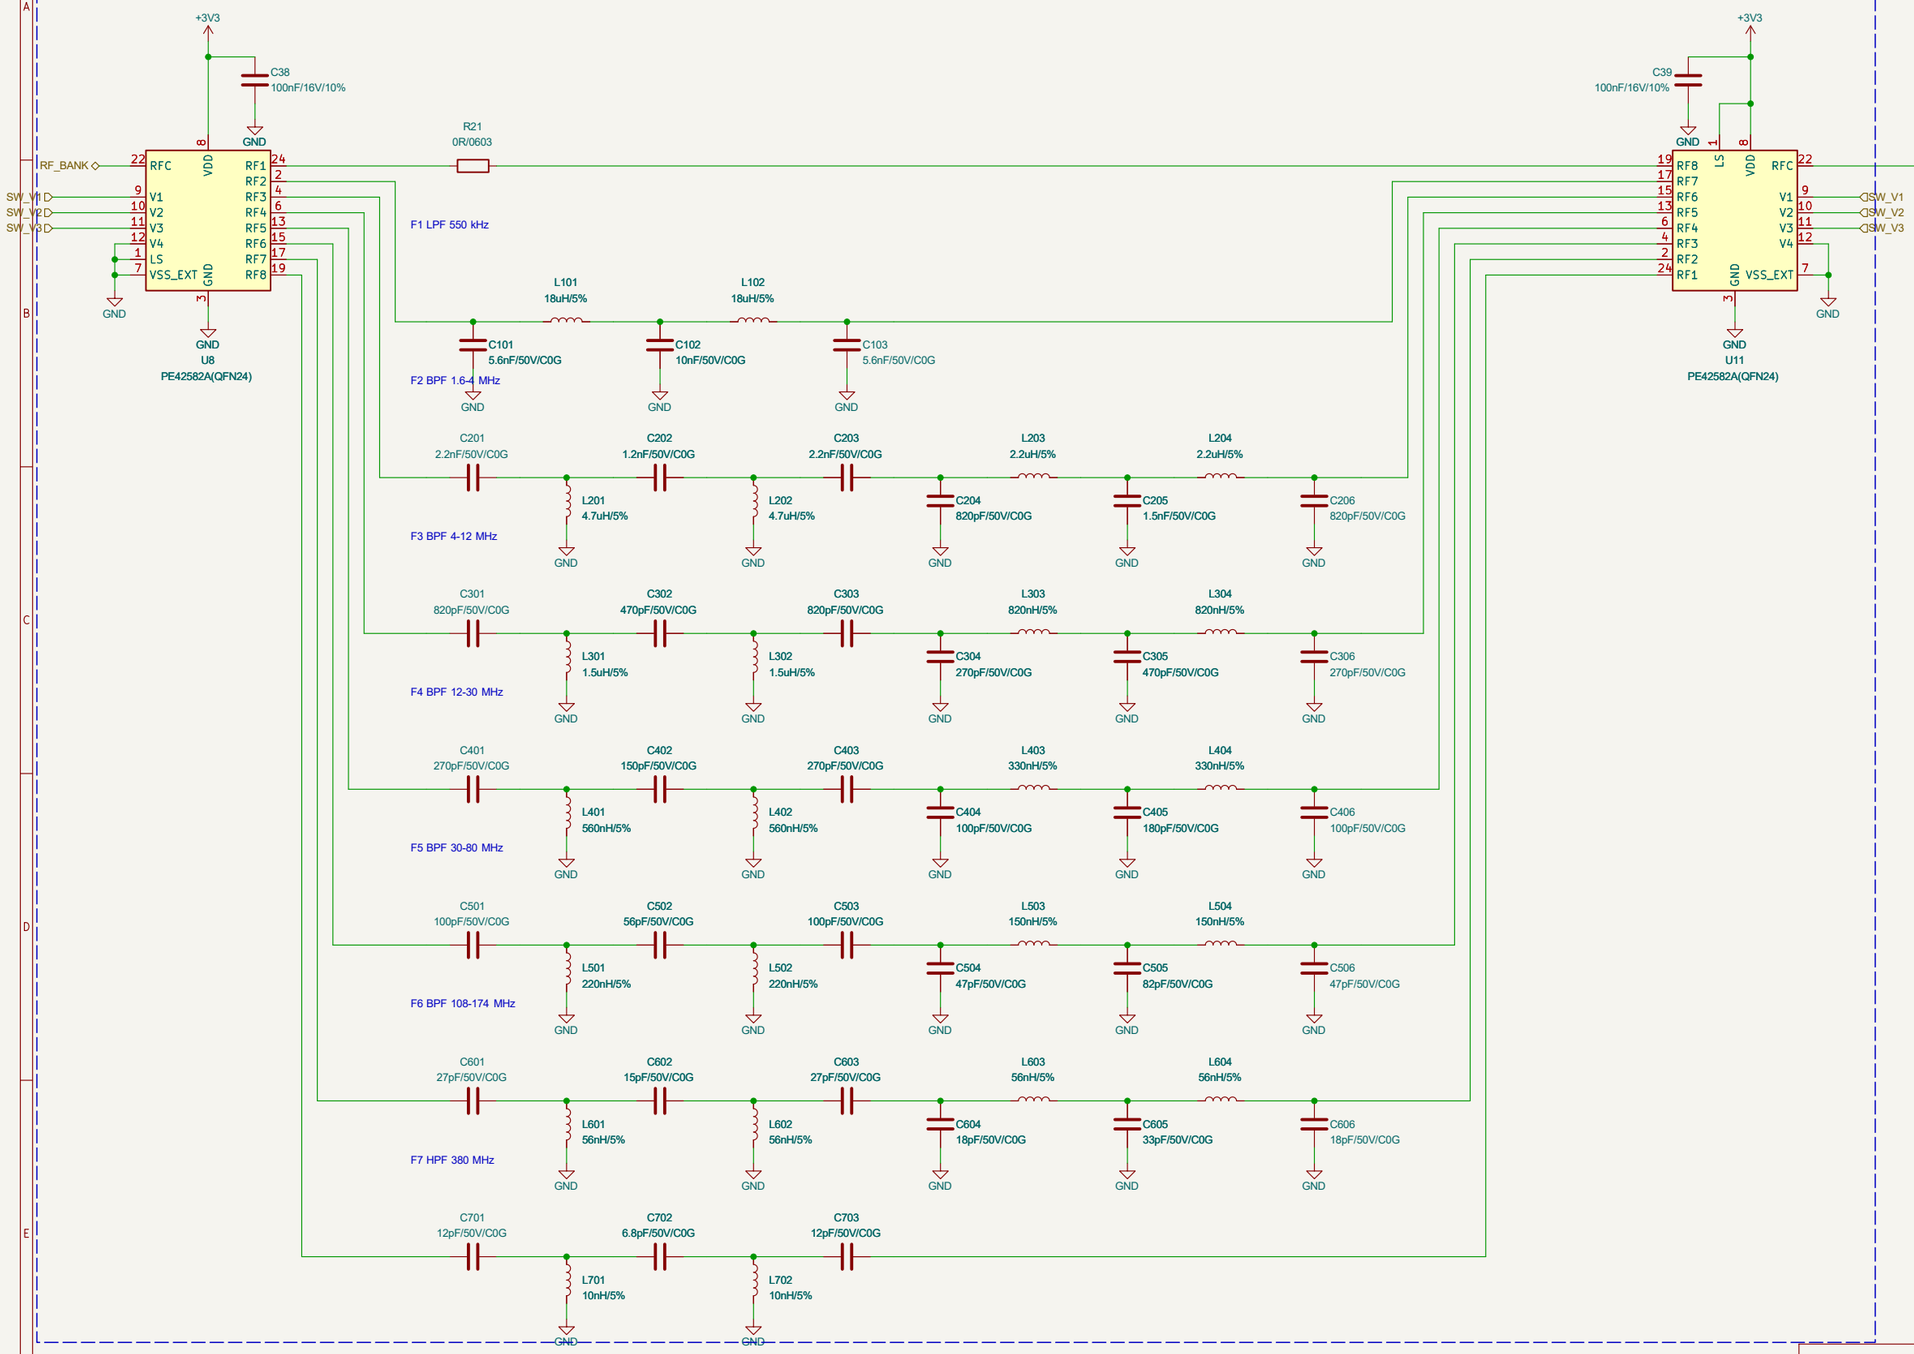


Bias-T + coax to RTL-SDR

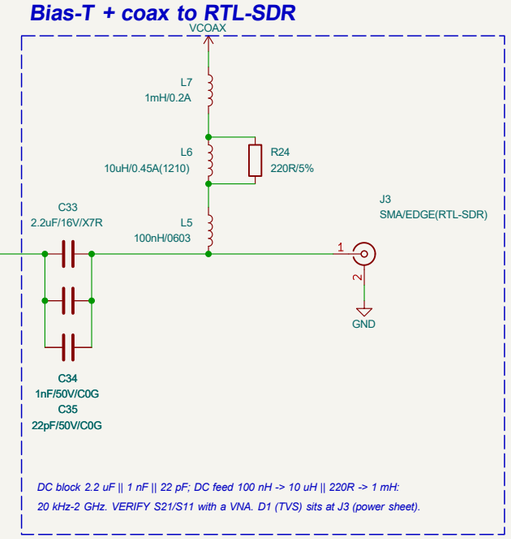

DC block 2.2 uF || 1 nF || 22 pF; DC feed 100 nH -> 10 uH || 220R -> 1 mH:
20 kHz-2 GHz. VERIFY S21/S11 with a VNA. D1 (TVS) sits at J3 (power sheet).

Control inputs

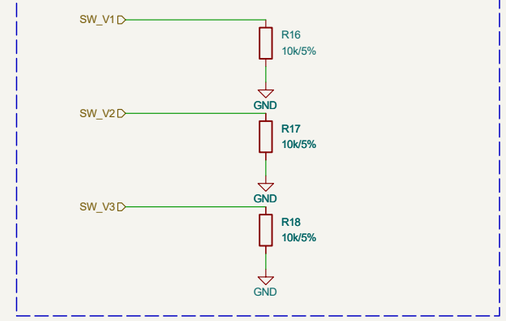

Branch k: U8 RF(k+1) (LS = 0), U11 RF(8-k) (LS = 1, mirror port).
Same V lines on both. U8 code (V3 V2 V1):
RF1 000, RF2 100, RF3 010, RF4 110, RF5 001, RF6 101, RF7 011, RF8 111
(mapped in tools/gen_bandplan.py). V4 = LS = VSS_EXT = GND.
Filters: 5th-order Chebyshev 0.1 dB, 50 ohm, E12 values,
BPF = HPF + LPF (tools/filters.py). Ideal-part response there;
VERIFY with real L Q / SRF and the layout on a VNA.

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
2x PE42582 SP8T, 8 filter branches, bias-T, coax


z2labs

Sheet: /Filter bank/
File: filterbank.kicad_sch


Title: Filter bank

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 5/6


columns 0-3 (lamps 0-3, 24-27)

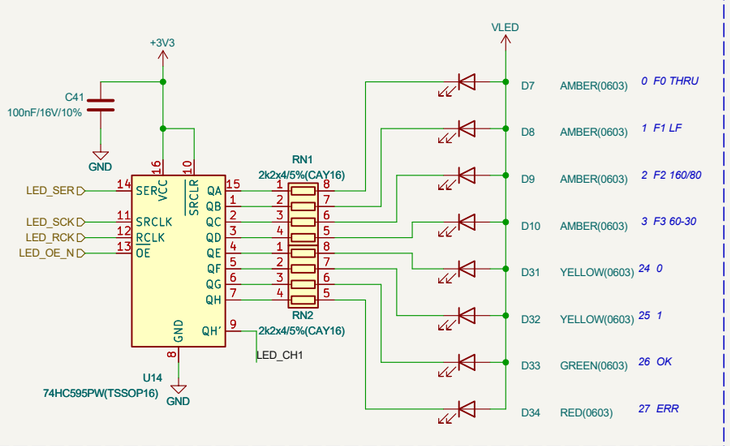

columns 4-7 (lamps 4-7, 28-31)

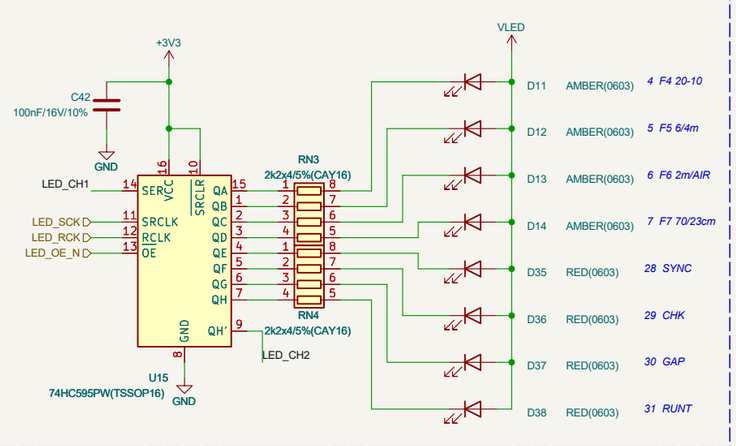

columns 8-11 (lamps 8-11, 32-35)

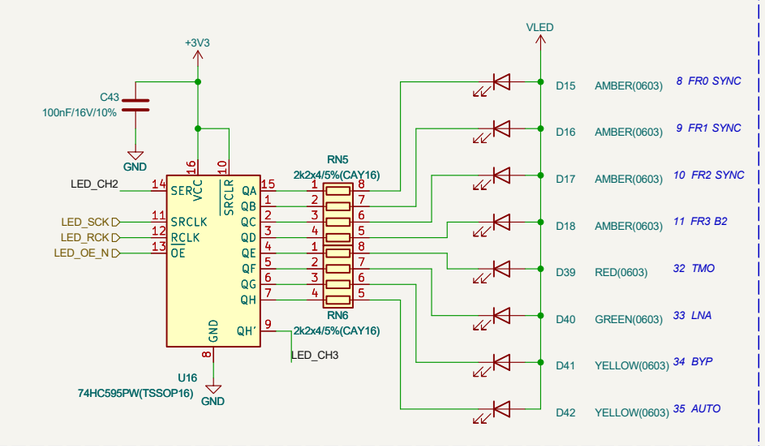


columns 12-15 (lamps 12-15, 36-39)


columns 16-19 (lamps 16-19, 40-43)

columns 20-23 (lamps 20-23, 44-47)

OE_N pull-up



Snap-off lamp strip link

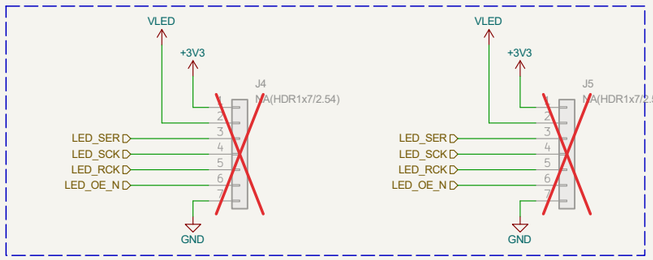

Lamp n: row n/24, column n%24; register (n%24)/4 (U14 first), output (n%4) + 4(n/24) - hal_panel.*
Q low = lamp on (sink). 1 mA per lamp: (VLED - 2 V - 0.1 V) / 2k2. Use 2 V LEDs only.
Lamp test lights all 48 (48 mA) with the LNA still off. Outside it, at most 23 lamps.
Panel modes (config frame, kept in flash): full / bands = F0-F7 only / off = OE_N high.
U14-U19, RN1-RN12, D7-D54, C41-C46 and J5 sit on the snap-off strip; J4 on the main board.

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
48-lamp front panel: 6x 74HC595 sinking, 2k2 arrays, VLED

z2labs

Sheet: /Panel/
File: panel.kicad_sch

Title: Panel

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. 10.0.6		Id: 6/6