

Coaxolotl - block diagram

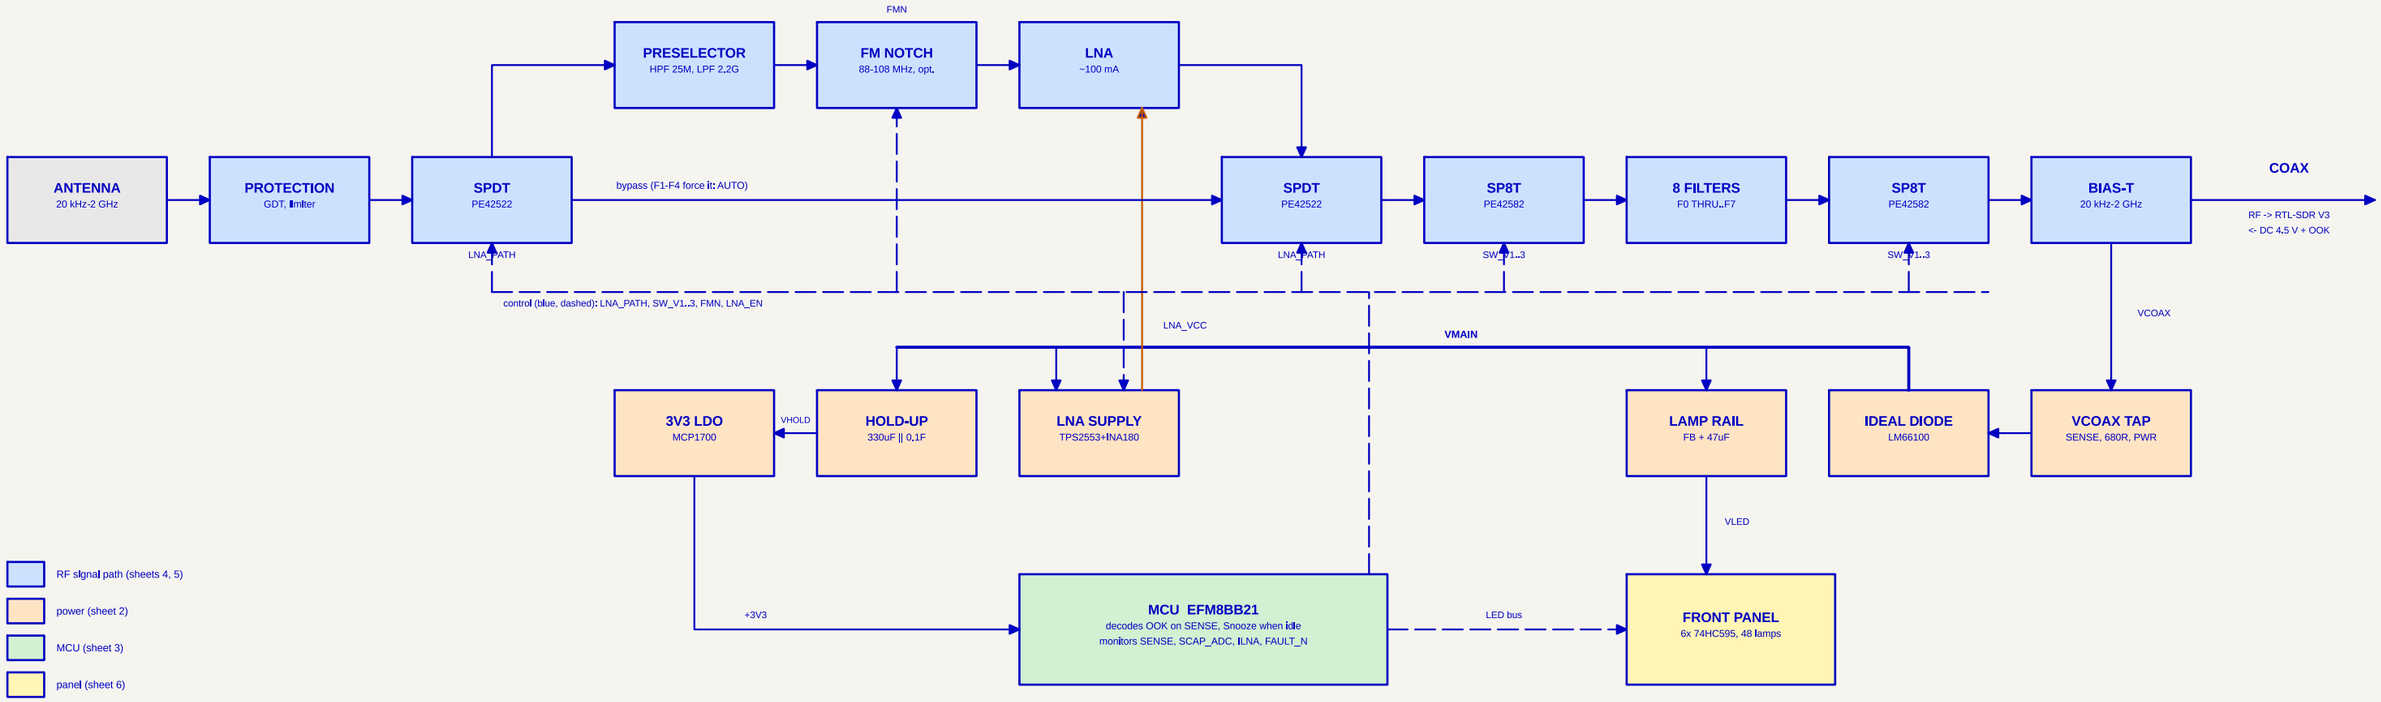

Sheets

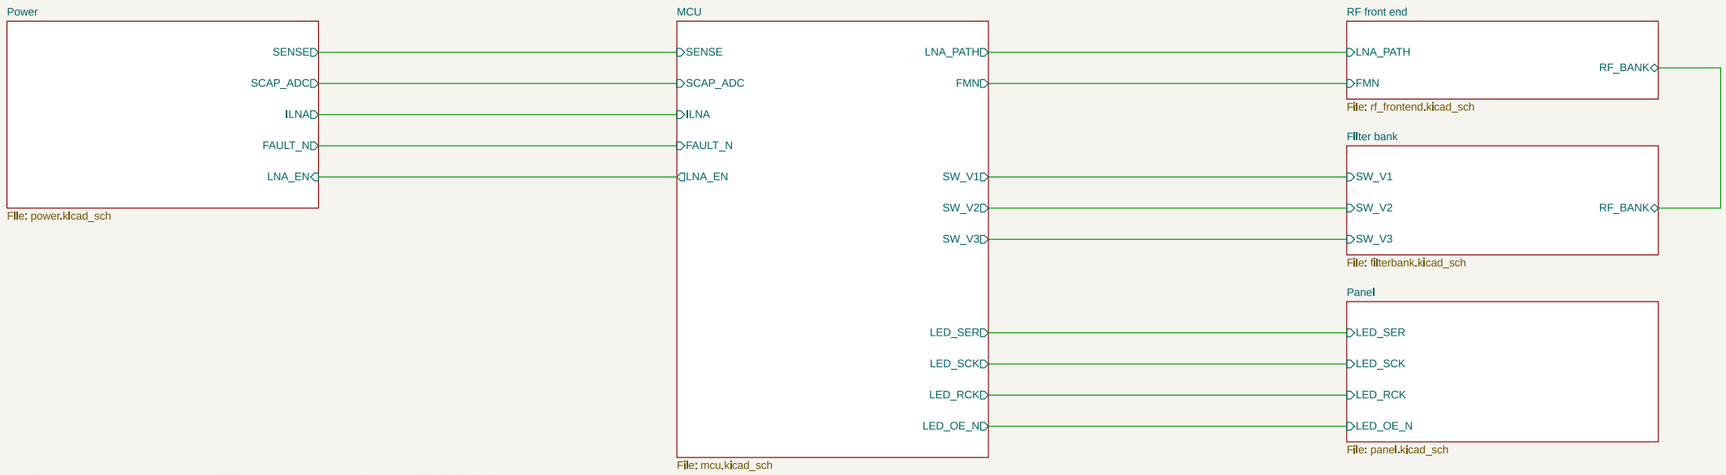


Power and ground cross sheets only as power symbols (VCOAX, VMAIN, VHOLD, VLED, LNA_VCC, +3V3, GND).

Signals cross sheets as hierarchical labels through the sheet pins above. Firmware pin map: firmware/src/hal_efm8bb2.c

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
Bias-T powered, OOK switched LNA + 8-way filter bank
z2labs

Sheet: /		
File: coaxolotl.kicad_sch		
Title: Coaxolotl		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/6


VCOAX tap

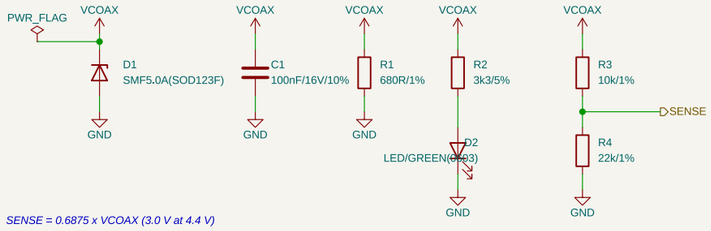

SENSE = 0.6875 x VCOAX (3.0 V at 4.4 V)

t_fall = 1.1 x R_eff x C_total: R1 sets the OOK falling edge


Ideal diode



CE = VOUT: comparator blocks

reverse current in OOK gaps


LNA supply + current monitor

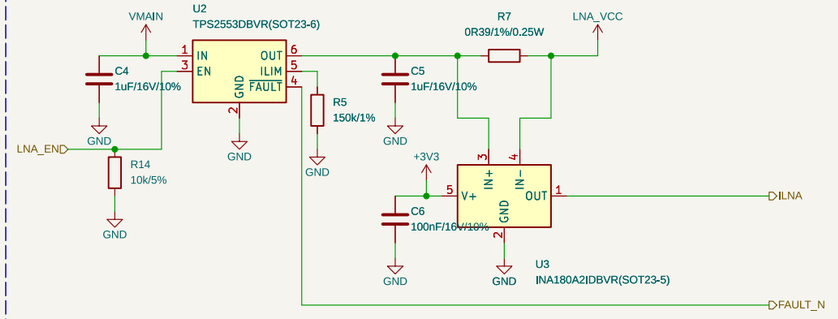

Ilim = f(R5), TPS2553 Eq.1: VERIFY IOS(min) > 130 mA

ILNA = 0.39R x 50 V/V = 19.5 mV/mA (100 mA -> 1.95 V); Kelvin taps at R7 pads


Lamp rail



48 lamps x 1 mA max on VMAIN:

dark in OOK gaps, no hold-up drain

Hold-up (diode-OR)

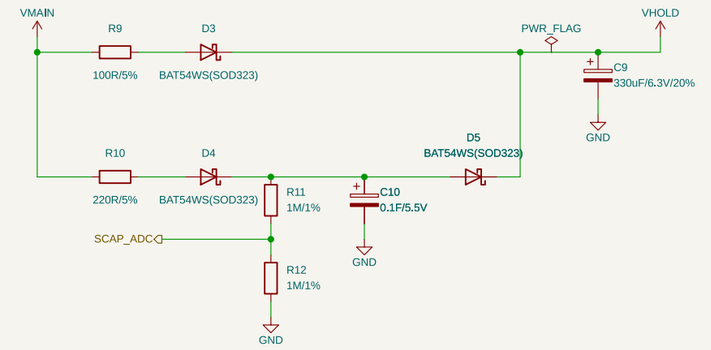


fast path R9/D3: VHOLD up in ~30 ms (100R x 330uF) -> MCU boots

slow path R10/D4: tau ~22 s (220R x 0.1F); ride-through ~4 min at 0.6 mA

SCAP_ADC = VSCAP / 2 (HOLD lamp at >= 3.6 V)

3V3 regulator

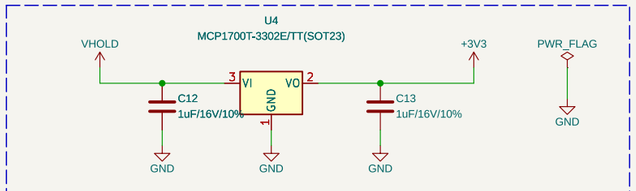

MCP1700: Iq 1.6 uA, dropout 178 mV;

VO needs >= 1 uF ceramic


Generated by hardware/kicad/tools/build.py — edit the Python, not this file

VCOAX tap, ideal diode, LNA supply switch + current monitor, lamp rail, hold-up, 3V3

z2labs

Sheet: /Power/		
File: power.kicad_sch		
Title: Power		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 2/6

MCU

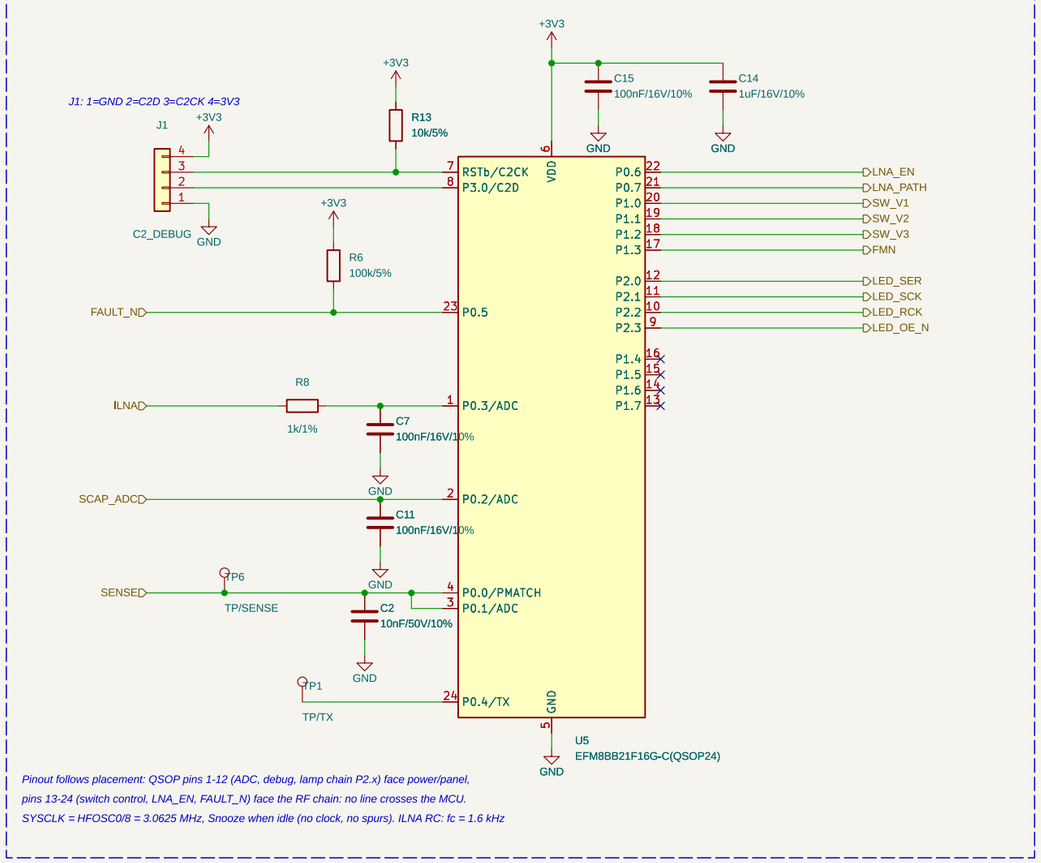

Pinout follows placement: QSOP pins 1-12 (ADC, debug, lamp chain P2.x) face power/panel, pins 13-24 (switch control, LNA_EN, FAULT_N) face the RF chain: no line crosses the MCU.

SYSCLK = HFOSC0/8 = 3.0625 MHz, Snooze when idle (no clock, no spurs). ILNA RC: fc = 1.6 kHz

Generated by hardware/kicad/tools/build.py — edit the Python, not this file

EFM8BB21F16G, C2 debug, ADC input conditioning

z2labs

Sheet: /MCU/

File: mcu.kicad_sch

Title: MCU

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 3/6

Antenna input + protection

J2
SMA/EDGE(ANT)

GDT1
GDT/90V

D6
BAV99W(SOT323)

R23
100k/5%

GDT 90 V, BAV99 low-C clamp, 100k bleed

LNA/BYP IN

C36
100nF/16V/10%

U6
PE42522B(LGA29)

bypass: F1-F4 (HF/LF) always, LNA off or tripped

LNA/BYP OUT

C37
100nF/16V/10%

U7
PE42522B(LGA29)

RF_BANK

Preselector (LNA path only)

HPF: 5th-order Butterworth T, fc ~25 MHz

LPF: LTCC, fc ~2.2 GHz

C24
200pF/50V/C0G

C25
68pF/50V/C0G

C26
200pF/50V/C0G

L1
220nH/5%

L2
220nH/5%

U12
LFCN-2250+(FV1206)

R22
0R/0603

LNA

LNA_VCC

FB2
FB0603/600R/1.3A

C30
10uF/10V/20%

R25
0R/0603

C28
100nF/16V/X7R

L4
1uH/BROADBAND

C31
100nF/16V/X7R

R26
10k/5%

U13
QPL9547TR7(DFN8-2x2)

VDD via RF_OUT choke, IDD 65 mA (QPL9547)

FM notch (DNP option)

U9
NA(PE42522B)

L3
NA(56nH/2%)

C27
NA(47pF/C0G)

U10
NA(PE42522B)

tank 56 nH ‖ 47 pF: f0 = 98 MHz

Control inputs (reset-safe pull-downs)

FMN

R19
10k/5%

LNA_PATH: 0 = RF1 = bypass, 1 = RF2 = LNA. FMN: 0 = RF1 = through, 1 = RF2 = notch.

PE42522 RF ports sit at 0 VDC: no blocking caps except around the LNA.

LNA_PATH

R15
10k/5%


Generated by hardware/kicad/tools/build.py — edit the Python, not this file
Antenna protection, LNA/bypass select, preselector, FM notch option, LNA
z2labs

Sheet: /RF front end/
File: rf_frontend.kicad_sch

Title: RF front end

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 4/6

Filter bank

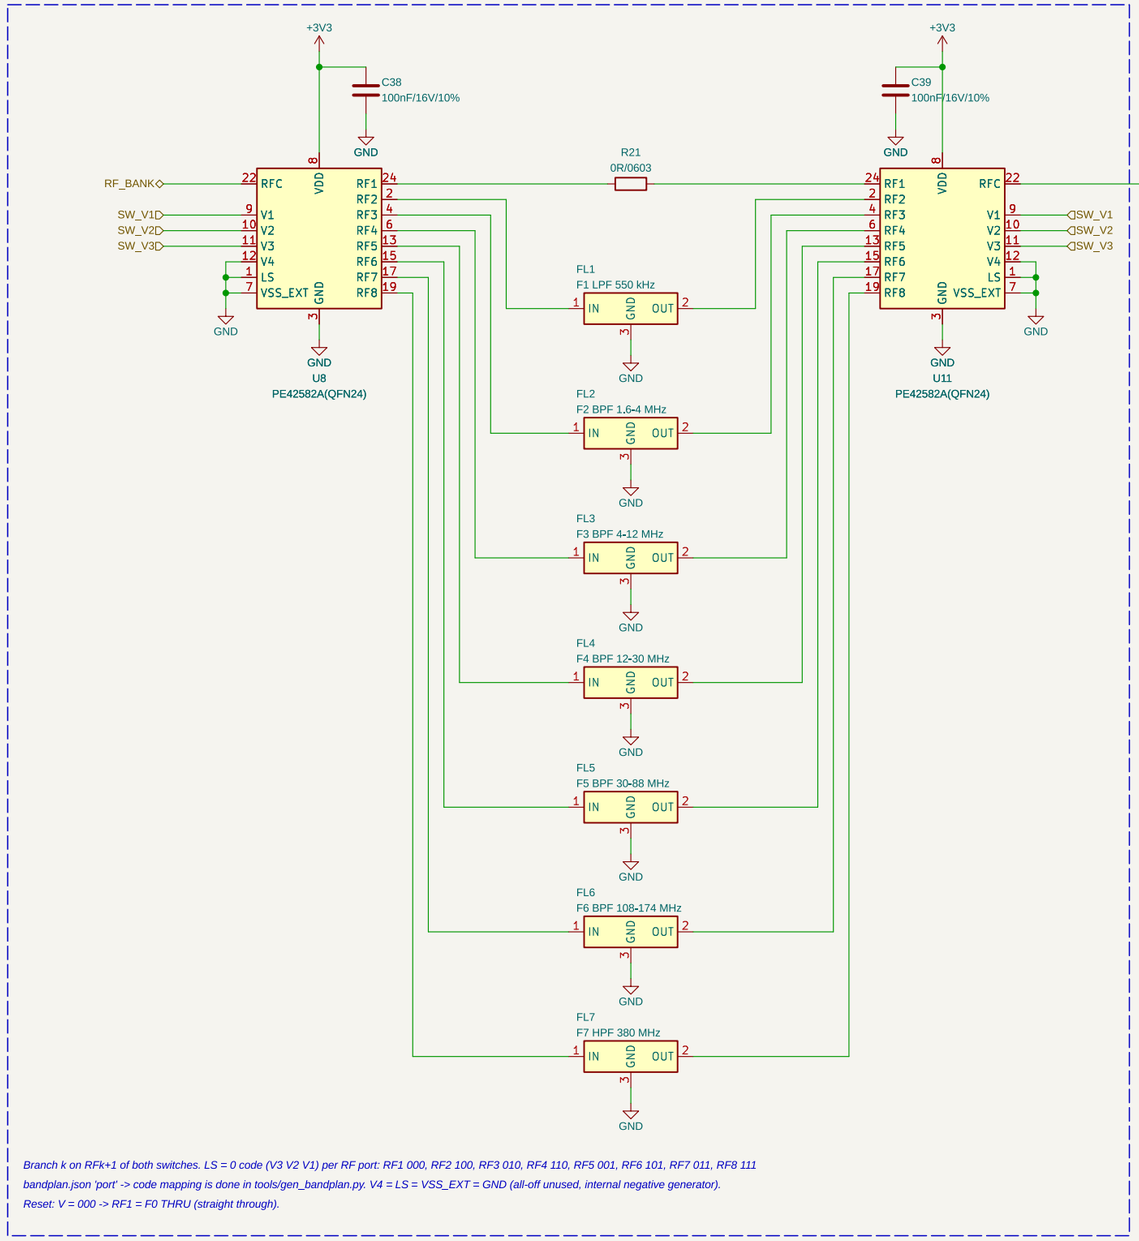


Branch k on RFk+1 of both switches. LS = 0 code (V3 V2 V1) per RF port: RF1 000, RF2 100, RF3 010, RF4 110, RF5 001, RF6 101, RF7 011, RF8 111

bandplan.json 'port' -> code mapping is done in tools/gen_bandplan.py. V4 = LS = VSS_EXT = GND (all-off unused, internal negative generator).

Reset: V = 000 -> RF1 = F0 THRU (straight through).


Bias-T + coax to RTL-SDR

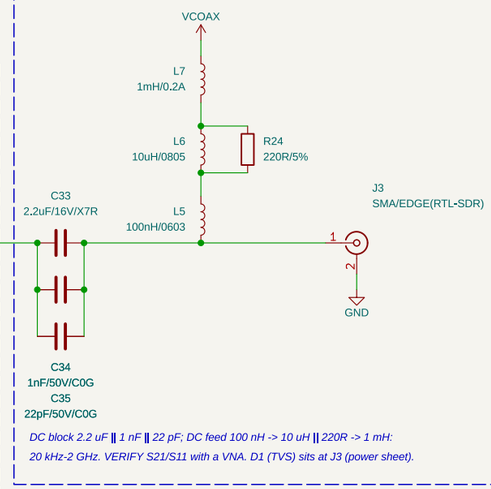

DC block 2.2 uF || 1 nF || 22 pF; DC feed 100 nH -> 10 uH || 220R -> 1 mH:

20 kHz-2 GHz. VERIFY S21/S11 with a VNA. D1 (TVS) sits at J3 (power sheet).

Control inputs

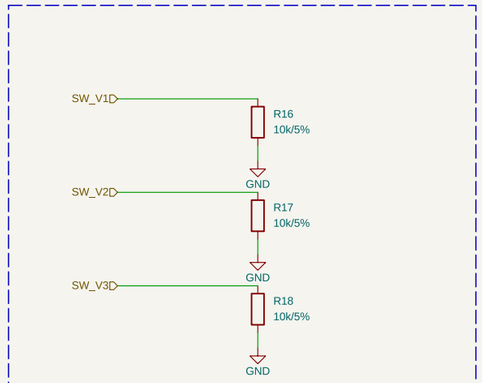

Generated by hardware/kicad/tools/build.py — edit the Python, not this file

2x PE42582 SP8T, 8 filter branches, bias-T, coax

z2labs


Sheet: /Filter bank/

File: filterbank.kicad_sch

Title: Filter bank

Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 5/6

Lamp chain inputs



NEXT REVIEW: 6x 74HC595 (sinking), 48 lamps on VLED, 2.2k arrays.

Generated by hardware/kicad/tools/build.py — edit the Python, not this file
48-lamp front panel — placeholder (next review)

z2labs

Sheet: /Panel/		
File: panel.kicad_sch		
Title: Panel		
Size: A3	Date: 2026-10-26	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 6/6